



**Remote Sensing for Resilient Multi-Hazard Disaster Response**

**Volume II: Counting the Number of Collapsed Buildings Using an Object-Oriented Analysis:  
Case Study of the 2003 Bam Earthquake**

by  
**Luca Gusella, Charles K. Huyck and Beverley J. Adams**



Technical Report MCEER-08-0021

November 17, 2008

## NOTICE

This report was prepared by ImageCat Inc. as a result of research sponsored by MCEER through a grant from the Earthquake Engineering Research Centers Program of the National Science Foundation under NSF award number EEC-9701471 and other sponsors. Neither MCEER, associates of MCEER, its sponsors, ImageCat Inc., nor any person acting on their behalf:

- a. makes any warranty, express or implied, with respect to the use of any information, apparatus, method, or process disclosed in this report or that such use may not infringe upon privately owned rights; or
- b. assumes any liabilities of whatsoever kind with respect to the use of, or the damage resulting from the use of, any information, apparatus, method, or process disclosed in this report.

Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the author(s) and do not necessarily reflect the views of MCEER, the National Science Foundation, or other sponsors.

# Remote Sensing for Resilient Multi-Hazard Disaster Response

## Volume II: Counting the Number of Collapsed Buildings Using an Object-Oriented Analysis: Case Study of the 2003 Bam Earthquake

by

Luca Gusella,<sup>1</sup> Charles K. Huyck<sup>2</sup> and Beverley J. Adams<sup>3</sup>

Publication Date: November 17, 2008

Submittal Date: April 10, 2008

Technical Report MCEER-08-0021

Task Number 10.3.1

NSF Master Contract Number EEC 9701471

- 1 Consulting Engineer; Former Research Fellow, Department of Civil and Environmental Engineering, University of Bologna, Italy
- 2 Executive Vice President, ImageCat, Inc.
- 3 Managing Director, ImageCat Ltd.

MCEER

University at Buffalo, State University of New York

Red Jacket Quadrangle, Buffalo, NY 14261

Phone: (716) 645-3391; Fax (716) 645-3399

E-mail: [mceer@buffalo.edu](mailto:mceer@buffalo.edu); WWW Site: <http://mceer.buffalo.edu>

---

## **NTIS DISCLAIMER**

- ❖ This document has been reproduced from the best copy furnished by the sponsoring agency.


## Preface

The Multidisciplinary Center for Earthquake Engineering Research (MCEER) is a national center of excellence in advanced technology applications that is dedicated to the reduction of earthquake losses nationwide. Headquartered at the University at Buffalo, State University of New York, the Center was originally established by the National Science Foundation in 1986, as the National Center for Earthquake Engineering Research (NCEER).

Comprising a consortium of researchers from numerous disciplines and institutions throughout the United States, the Center's mission is to reduce earthquake losses through research and the application of advanced technologies that improve engineering, pre-earthquake planning and post-earthquake recovery strategies. Toward this end, the Center coordinates a nationwide program of multidisciplinary team research, education and outreach activities.

MCEER's research is conducted under the sponsorship of two major federal agencies: the National Science Foundation (NSF) and the Federal Highway Administration (FHWA), and the State of New York. Significant support is derived from the Federal Emergency Management Agency (FEMA), other state governments, academic institutions, foreign governments and private industry.

MCEER's NSF-sponsored research objectives are twofold: to increase resilience by developing seismic evaluation and rehabilitation strategies for the post-disaster facilities and systems (hospitals, electrical and water lifelines, and bridges and highways) that society expects to be operational following an earthquake; and to further enhance resilience by developing improved emergency management capabilities to ensure an effective response and recovery following the earthquake (see the figure below).

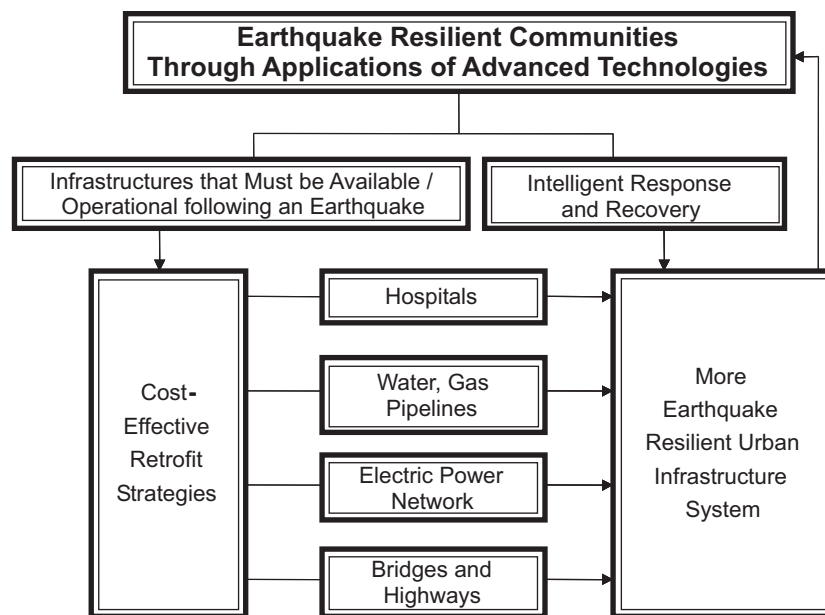

A cross-program activity focuses on the establishment of an effective experimental and analytical network to facilitate the exchange of information between researchers located in various institutions across the country. These are complemented by, and integrated with, other MCEER activities in education, outreach, technology transfer, and industry partnerships.

*This report presents a new image processing technique based on 'object-oriented' analysis to count the number of buildings that collapsed during the 2003 Bam, Iran earthquake. Two methodologies are presented, both using a two-phase process comprising building inventory development and damage assessment. Building inventory development provides a count of the total number of structures (both damaged and non-damaged) based on analysis of the 'before' building stock. The damage assessment employs reclassification and edge extraction theoretical techniques to identify the presence of collapsed structures. This is Volume II of a five part series of reports that investigate the use of remote sensing techniques for resilient multi-hazard disaster response.*

## PREFACE

This preface introduces a five volume series, documenting scientific research conducted by MCEER researchers at ImageCat, Inc., investigating remote sensing techniques for resilient disaster response.

Volume I: INTRODUCTION TO DAMAGE ASSESSMENT METHODOLOGIES

Volume II: COUNTING THE NUMBER OF COLLAPSED BUILDINGS USING AN OBJECT-ORIENTED ANALYSIS: CASE STUDY OF THE 2003 BAM EARTHQUAKE

Volume III: MULTI-SENSOR IMAGE FUSION TECHNIQUES FOR ROBUST NEIGHBORHOOD-SCALE URBAN DAMAGE ASSESSMENT

Volume IV: A STUDY OF MULTI-TEMPORAL AND MULTI-RESOLUTION SAR IMAGERY FOR POST-KATRINA FLOOD MONITORING IN NEW ORLEANS

Volume V: INTEGRATION OF REMOTE SENSING IMAGERY AND VIEWS™ FIELD DATA FOR POST-HURRICANE CHARLEY BUILDING DAMAGE ASSESSMENT

The report series embraces MCEER's stated mission of pursuing *the discovery and development of new knowledge, tools and technologies that equip communities to become more disaster resilient in the face of earthquakes and other extreme events*. Accordingly, the research documented here is multi-hazard in nature, spanning international earthquake, flood and hurricane events. In all cases, the research is undertaken with the underlying goal of improving resilience, in particular the *rapidity* and *resourcefulness* of disaster response activities. Further, it is aimed at meeting stated user needs in the immediate aftermath of disasters, such as a rapid estimate of the number of collapsed/damaged structures, and the delineation of flood inundation zones.

These volumes represent a significant milestone in post-disaster damage assessment, constituting the culmination of seven years' research activities. During this time, we have witnessed the 'Coming of Age' of remote sensing technologies and analytical techniques within the disaster response arena. *Technology push* in the form of new sources of high-resolution imagery and increasingly advanced and analytical techniques has driven the development of new capabilities attuned to meet the needs of responders. This has been coupled with heightened *User pull* from sectors including the re/insurance industry, and with the onset of recent catastrophes such as hurricane Katrina, opportunities for operational implementation.

Research collaborations established by ImageCat, Inc. with multi-hazard researchers from the US, Italy and UK, underpin this report series. Through sharing and exchanging a wealth of experience and expertise, the teams of scientists and engineers have advanced the knowledge boundaries of remote sensing damage detection. Particular highlights include:

- ✓ The ability to rapidly count the number of collapsed buildings, where a building is treated as an ‘object’ within the digital image, rather than a group of pixels (Volume II in collaboration with the University of Bologna)
- ✓ The fusion of pre- and post-disaster imagery captured by different high resolution sensors to facilitate flexible damage mapping irrespective of which sensor passes first over the disaster zone (Volume III)
- ✓ The use of cloud-penetrating to assess flooding extent throughout storm-ridden areas (Volume IV in collaboration with University College London)
- ✓ HAZUS-compatible post-hurricane damage assessment based on remote sensing imagery, when access to the disaster zone is precluded (Volume V in collaboration with Texas Tech University).

In June 2006, MCEER launched its Remote Sensing Institute (RSI), which will *serve as a platform for developing and operationally implementing innovative multi-hazard techniques, strategies and products for rapidly assessing post-disaster impacts, modeling and quantifying the built environment, and monitoring recovery*. The RSI will continue to embrace fundamental and applied research activities to develop innovative new approaches to short- and long-term disaster management. Commercial products and services developed by MCEER researchers and available through RSI include: near real-time flood, surge, hurricane, earthquake and tsunami damage assessment through remote sensing-based damage scales and advanced image analysis techniques; and forensic GPS-registered damage assessment using the in-field VIEWS™ data collection and visualization system.



## ABSTRACT

Volume II in this five volume report series documents exploratory research conducted by MCEER researchers at ImageCat in collaboration with the University of Bologna, using a new image processing technique based on '*object-oriented*' analysis to *count the number of buildings that collapsed* during the 2003 Bam, Iran earthquake.

From a resilience standpoint, the ability to swiftly count the number of collapsed buildings is valuable, because it can be used to generate *rapid* loss estimates for urban structures, benefiting the re-insurance industry, and also to infer the number of casualties, helping national and international emergency management teams and aid agencies scale search and rescue and response activities.

Two object-oriented methodologies are presented for quantifying the number of collapsed buildings using high-resolution optical satellite imagery captured before and soon after the event. The methodologies employ a two-phase process, comprising: (1) building inventory development; and (2) damage assessment. Building inventory development provides a count of the total number of structures (both damaged and non-damaged) based on analysis of the 'before' building stock. The damage assessment employs reclassification and edge extraction theoretical techniques to identify the presence of collapsed structures.

For the reclassification, it was found that intact adobe buildings are characterized by homogenous and bright/white domed or flat rooftops. In contrast, the collapsed structures appear as chaotic piles of debris, of a subdued color that is similar to the surrounding soils. For the edge-based approach, damaged buildings were identified through differences between the occurrence of edge features within the before and after images. In this instance, intact adobe buildings are delineated around the margin, with limited texture on the domed roof. In contrast, irregular edges occur within collapsed structures, associated with chaotic debris piles.

Accuracy of the initial building inventory extraction proved to be a major determinant of accuracies achieved with the building damage count. The key processing step of segmentation was found to overestimate the frequency of objects, even when 'optimum' parameters were employed on a scene-wide basis. This suggests that future work should focus on the implementation of different intra-scene segmentation factors, attuned to each major class of building stock.

The reclassification methodology performed better than the edge-extraction technique. The final count of collapsed buildings was 17% higher than the validation dataset developed by Yamazaki et al. (2004). This overestimation is largely due to object split at the segmentation phase and reinforces the importance of further research to improve the accuracy of building inventory extraction prior to damage assessment.



## ACKNOWLEDGEMENT

This research was conducted while Dr. Luca Gusella completed an internship at ImageCat from September 2005 to December 2005. The research was supported by the University of Bologna's Marco Polo program and Earthquake Engineering Research Centers Program of the US National Science Foundation under award number EEC-9701471 to MCEER. We would like to thank MCEER Thrust Area III leader Kathleen Tierney for her continued guidance and support for this research.

Additionally, we would like to acknowledge the following individuals for their contributions to the work documented in these five volumes:

Gabriele Bitelli, DISTART, University of Bologna

Simon Chesworth, MDA Corporation

Shubharoop Ghosh, ImageCat, Inc.

Marjorie Greene, EERI

Kishor Mehta, WISE Center, Texas Tech University

Jeremy Morley, Department of Geomatic Engineering, UCL

Keiko Saito, Cambridge University Centre for the Risk in the Built Environment (CURBE)

J. Arn Womble, WindForce Associates, Inc

Thuy Vu, GTRC, Japan



## TABLE OF CONTENTS

SECTION	TITLE	PAGE
<b>1</b>	<b>INTRODUCTION</b>	1
1.1	Rationale and Literature Review	1
1.2	Approach	3
1.3	Datasets and Pre-Processing	5
<b>2</b>	<b>METHOD 1: RECLASSIFICATION</b>	9
2.1	Segmentation (Step 1)	9
2.2	Building Classification (Step 2)	14
2.3	Damage Detection (Step 3 and Step 4)	15
2.4	Counting the Number of Collapsed Buildings (Step 5)	15
<b>3</b>	<b>RESULTS 1: RE-CLASSIFICATION</b>	17
3.1	Segmentation	17
3.2	Building Classification (Step2)	17
3.3	Damage Detection (Step 3 and Step 4)	19
3.4	Counting the Number of Collapsed Buildings (Step 5)	21
<b>4</b>	<b>METHOD 2: EDGE-BASED DAMAGE THRESHOLD</b>	23
4.1	Shrinking the Building Outlines (Step 1)	23
4.2	Edge Detection Filtering (Step 4)	25
4.3	Superimpose Shrunk Buildings and Compute Damage Threshold (Step 5 and Step 6)	25
4.4	Counting the Number of Collapsed Buildings (Step 7)	26
<b>5</b>	<b>RESULTS 2: EDGE-BASED DAMAGE THRESHOLD</b>	27
5.1	Shrinking the Building Outlines (Step 3)	27
5.2	Edge Detection Filtering (Step 4)	27
5.3	Superimpose Shrunk Buildings and Compute Damage Threshold (Step 5 and Step 6)	28
5.4	Counting the Number of Collapsed Buildings (Step 7)	32
<b>6</b>	<b>KEY FINDINGS AND FUTURE WORK</b>	33
<b>7</b>	<b>REFERENCES</b>	35



## LIST OF ILLUSTRATIONS

FIGURE	TITLE	PAGE
1-1	Methodology Flow Diagram Illustrating the Two Different Techniques Investigated for Counting Building Collapse in Bam: (a) Reclassification; and (b) Edge-Based Damage Threshold	4
1-2	Examples of Building Fabrics and Damage in Bam	6
1-3	Validation Dataset for Bam, Showing EMS Damage Levels, 1, 3, 4 & 5.	7
2-1	Concept Flow Diagram for Multi-Resolution Segmentation	10
2-2	ECognition User Interface for Multi-Resolution Segmentation Parameter Specification. Objects of Interest are Identified by Varying Scale, Color and Shape Criteria	12
2-3	Example of Digitized Buildings and Correspondence with Overlapping Objects Evaluated for Segmentation Parameter Optimization in Bam. Segmentation Parameters Used were Scale = 30, Color = 0.1, Shape> Smooth = 1	13
2-4	Comparison Between Objects Delineated Using Different Spectral and Smoothness Segmentation Parameters	13
2-5	Segment (Red Areas Divided by White Line) and Digitized Object (Black Line) Correspondence. Segmentation Scenarios: a) Perfect Fit; b) Object Fragmentation; c) Building Fragmentation; and d) Object Building Fragmentation.	14
3-1	Evaluation of Segmentation Scale Factor for a Sample of 108 Digitized Buildings	18
3-2	Minor Offset in Image Registration, Illustrated by Overlaying ‘Before’ Image Building Outlines with the ‘After’ Image	20
3-3	Building Damage Map for the City of Bam, Based on Object-Oriented Analysis of Quickbird Imagery Captured Before and After the Event	21
4-1	Changes Between the Spectral Characteristics Around the Margins of a Non-Damage Roof for (a) Before and (b) After Quickbird Images of Bam. Differences are Due to Variations in Acquisition Angle and Illumination Conditions	24
4-2	Use of Building Shrinkage to Mitigate the Effects of Shadow Differences Between Before and After Images, which Affect the Accuracy of Damage Detection	24
4-3	Example of Visually-Assessed EMS98 Damage Levels Overlaid with the ‘After’ Image	26

## LIST OF ILLUSTRATIONS (CONTINUED)

FIGURE	TITLE	PAGE
5-1	The Effect of Implementing Building Shrinkage by 0.6m, 1.2m and 1.8m when Computing the Frequency of Edge Pixels. This Example is for a Non-Collapsed Structure.	27
5-2	a) Before Event Image; b) After Event Image; (c) 17x17 Canny Filtered Before Image; and (d) 17x17 Canny Filtered After Image. Building Outlines are Superimposed, with Non-Collapsed in Green and Collapsed in Red.	28
5-3	Threshold Evaluation for the Edge-Based Damage Index	29
5-4	Frequency of Edge Pixels Occurring within (a) Before and (b) After Images for Buildings Classified According to the EMS98 Damage Scale	30
5-5	Variation in the Frequency of Edge Pixels Occurring within Buildings Classified as EMS98 Level 5 (Destruction) and Level 2 (Moderate Damage) for Non-Damaged (Before) and Damaged (After) Scenarios. The Difference Between the Before and After Results is also Shown.	31



## LIST OF TABLES

<b>TABLE</b>	<b>TITLE</b>	<b>PAGE</b>
1-1	High-Resolution Quickbird Imagery of Bam and Pre-Processing Procedures	5
3-1a	Confusion Matrix for Building Classification Using the ‘Before’ Imagery The Total Number of Objects within each Class is also Shown, Together with the Number of Training Samples Used.	18
3-1b	‘Reduced’ Confusion Matrix (Czaplewski, 1992), Showing “User” and “Producer” Classification Accuracies (Congalton, 1982) for Classes of ‘Building’ and ‘Other’ (Not Building, Shadow and Vegetation)	19
3-2	Results for the Damage Re-Classification and Count of Collapsed Buildings. The Confusion Matrix for the Accompanying Accuracy Assessment Shows the “Producer” Classification Accuracy (Congalton, 1982) Used to Compute the Final Count.	20
4-1	Acquisition and Illumination Characteristics of Bam Quickbird Images	24
5-1	Number of Collapsed Buildings, Computed Using the Edge-Based Damage Classification. Area of Building Collapse is Expressed M <sup>2</sup> .	32
5-2	Confusion Matrix Relating to the Accuracy Assessment for the Edge-Based Damage Classification	32



## SECTION 1 INTRODUCTION

### 1.1 Rationale and Literature Review

Volume II of this five volume report series entitled *Remote Sensing for Resilient Multi-Hazard Disaster Response* documents research conducted through collaboration between MCEER researchers at ImageCat and DISTART at the University of Bologna. The aim of this research is to *develop a new object-oriented methodology for rapidly counting the number of collapsed buildings in the immediate aftermath of a major earthquake*. The 2003 Bam (Iran) earthquake is employed as a case study (see Volume I in this report series for details of the event).

In the aftermath of a disaster, a rapidly produced count of the number of collapsed buildings is valuable, because it may be used for a range of applications including:

- Generating rapid and robust loss estimates for urban structures, benefiting the re/insurance industry;
- Inferring the number of casualties, helping national and international emergency management teams and aid agencies scale search and rescue and response activities.

However, this statistic is often unavailable in the days following an event, due to limited access to the affected area, and difficulties rapidly assessing the damage state of a large number of structures, in an efficient and timely way. For example, almost one month had elapsed before an initial statistic for the number of houses destroyed beyond repair in Bam and the surrounding villages was published by the United Nations (United Nations, 2004). The uncertainty regarding damage and casualties that typically exists in the immediate aftermath of such an event, reinforces the need for rapid and objective loss estimates; for example, in the days following the Bam earthquake, the media reported widely fluctuating casualties that ranged between >41,000 and the more recently accepted statistic of ~25,000 (BBC, 2004). In contrast, the remote sensing-based approach described here offers a *resilient* assessment of the post-disaster situation (Bruneau et al., 2003), through the *rapid* and independently-derived assessment of damage, and the implementation of a *resourceful* approach that is not affected by ground-access issues.

This volume of the report series describes a novel ‘object-oriented’ methodology for counting the number of collapsed buildings, where a cluster of pixels corresponding with a *building* is categorized as an *object*. Analytically, this approach differs from traditional ‘pixel-based’ optical analyses (see, for example, Volume III of this report series) used to develop damage maps following the 1995 Kobe, Japan (Matsuoka and Yamazaki, 1998), 1999 Marmara, Turkey (Adams and Huyck, 2006; Chiroiu et al., 2006; Eguchi et al., 2002; Huyck et al., 2004), and 2001 Boumerdes, Algeria (Adams et al., 2003) earthquakes. In theoretical terms, an optical pixel-based approach provides information as a function of the reflectance (spectral) and thematic (textural) characteristics of *single* pixels, rather than group of contextually related pixels within the remote sensing scene (Schowengerdt, 1983). Volume I of this report series provides a theoretical review of pixel- versus object-based analytical techniques.

In addition to the reflectance and textural characteristics studied at a per pixel scale (see, for example, Herold et al., 2002; Liu et al., 2005; Walter, 2004), object-oriented analysis also

considers shape; for example, whether the object is elongate like a road or compact like a building. Furthermore, object-oriented analysis also yields *contextual* information. According to Benz *et al.* (2004) advantages include the close relation between real-world objects (such as buildings) and image objects, and the availability of new topological information reflecting the relationship between segments. Consequently, object-based image analysis more fully exploits the information derived from remotely sensed images, utilizing as much of the contextual and relational information as possible (Baatz and Schape, 2000).

Object-oriented analysis may employ several different theoretical approaches, including mathematical morphology analysis and multi-resolution segmentation. Mathematical morphology image processing techniques analyze the shape and form of objects, and are based on set theory integral geometry and lattice algebra (Serra, 1982). Stasolla *et al.* (2005) explore the use of morphological operators in tandem with a change detection methodology for post-earthquake damage assessment.

The multi-scale/multi-resolution approach, which constitutes the focus of this study, operates on the premise that objects of different sizes are present within an image. For example, as the segment resolution increases, objects captured may vary from a chimney stack, to a building roof, to a city block, to an entire urban area. This is achieved by a hierarchical network of image objects, the resolution of which is determined by User specifications (see Benz *et al.*, 2004). Hierarchical processing includes the fractal net evolution approach (Baatz and Schäpe 2000), receiver operating characteristic analysis (Hutchinson and Chen, 2005), mathematical morphology (1992), Wavelet decomposition (Sheikholeslami *et al.* 2000), and building a network of linked objects across the scale-space (Vu *et al.* 2005a, 2005b, 2006). Gamba *et al.* (2005) employ a range of geometric and perceptual rules to extract objects of interest.

From an image processing standpoint, a number of different software options exist for conducting object-based analysis (for details, see Baltsavias, 2004; Gusella, 2006). However, in terms of off-the-shelf solutions available to the research community, eCognition is the first commercially-available object-oriented image processing software (Benz *et al.*, 2004). This has become the focus of an ever expanding research field investigating the object as a basic unit for image analysis. Since this research is concerned with developing a practical methodology for damage assessment, the potential of eCognition for fulfilling this requirement is investigated.

In terms of research applications within urban environments, previous studies have investigated its use to identify urban landuse (Kressler *et al.*, 2005a), delineate buildings (Herold *et al.*, 2002; Liu *et al.*, 2005) and refugee tents (Giada *et al.*, 2003), distinguish roof material types (Lemp and Weidner, 2005), and update inventory databases with areas of new construction (Blaschke, 2004; Kressler *et al.*, 2005b) However, while hazard-related uses ranging from flood detection to agricultural crop monitoring are also documented (Definiens, 2006), comparatively few studies have explored its potential for post-disaster urban damage detection.

Using eCognition, Bitelli *et al.* (2004) successfully identify building damage caused by the 2003 Boumerdes, Algeria, Earthquake through examining optimal levels of a hierarchical object-based framework within high-resolution multi-temporal imagery. This work provided a basis for the University of Bologna and MCEER researchers to collaboratively investigate object-oriented techniques for damage assessment following the Bam earthquake (Gusella *et al.*, 2005).

A limited number of other eCognition-based damage detection studies are documented in the literature, since this is a relatively new and emerging research area. Kouchi and Yamazaki (2005) use a single post-event image and Matsumoto *et al.* (2006) pre- and post-disaster coverage to respectively explore damage caused by the 2003 Boumerdes and 2006 Central Java earthquakes. In addition to direct earthquake damage, eCognition has also recently been used to detect secondary tsunami wave effects caused by the 2004 Sumatra-Andaman earthquake, recoded by pre- and post-event radar imagery (Greidanus *et al.* 2005). Outside the eCognition processing environment, Vu *et al.* (2005a, 2005b, 2006) explore a morphological approach for post-earthquake damage detection in Bam, Iran, and damage mapping in tsunami-affected areas.


## 1.2 Approach

Change detection is an important methodological component of damage detection studies such as these. A range of techniques have been explored for detecting and characterizing urban changes arising from disasters and urban development, some of which are based on pixels, and other objects (for a useful summary see Hall and Hay, 2003). As shown by the methodology flow diagram in figure 1-1, a series of two different image processing and analytical approaches are explored here for counting building collapse:

1. Method 1: Reclassification
2. Method 2: Edge-based damage threshold

Reclassification uses information extracted from a set of sample buildings in the ‘after’ image to reclassify building footprints extracted from the ‘before’ scene into classes of collapsed and non-collapsed. This is arguably the simplest and most rapid procedure, since it is conducted within the eCognition image processing software and does not require the extraction of event-specific statistics. However, there are several potential disadvantages: first, the accuracy achieved in reclassification is dependent on the identification of representative examples of damaged buildings as training samples; and second, unless the characteristics of building damage are constant between events, this method does not lend itself to generalization, and thus automation. In contrast, the damage thresholds involve assigning specific textural (in this case edge-based) characteristics to building collapse, which have the potential to be used more generally for automated damage assessment. Further, these damage assessment procedures may be implemented in conjunction with the object-oriented approach described in the following sections, or at other ‘pixel-based’ levels of the Tiered reconnaissance framework, with for example, generalized thresholds providing a basis for a rapid neighborhood assessment.

Following a summary of the datasets employed and preprocessing procedures (Section 1-3), Section 2 and Section 3 describe the method and results obtained using a reclassification-based object-oriented image processing technique. Sections 4 and 5 present the method and results for an edge-based approach. In both cases, the method employs the same pre-processed images of Bam, and involves two major components: (a) initial processes for building inventory development, to identify the total number of buildings (both damage and non-damaged) within the city; and (b) subsequent damage assessment processes for establishing which of these structures collapsed.

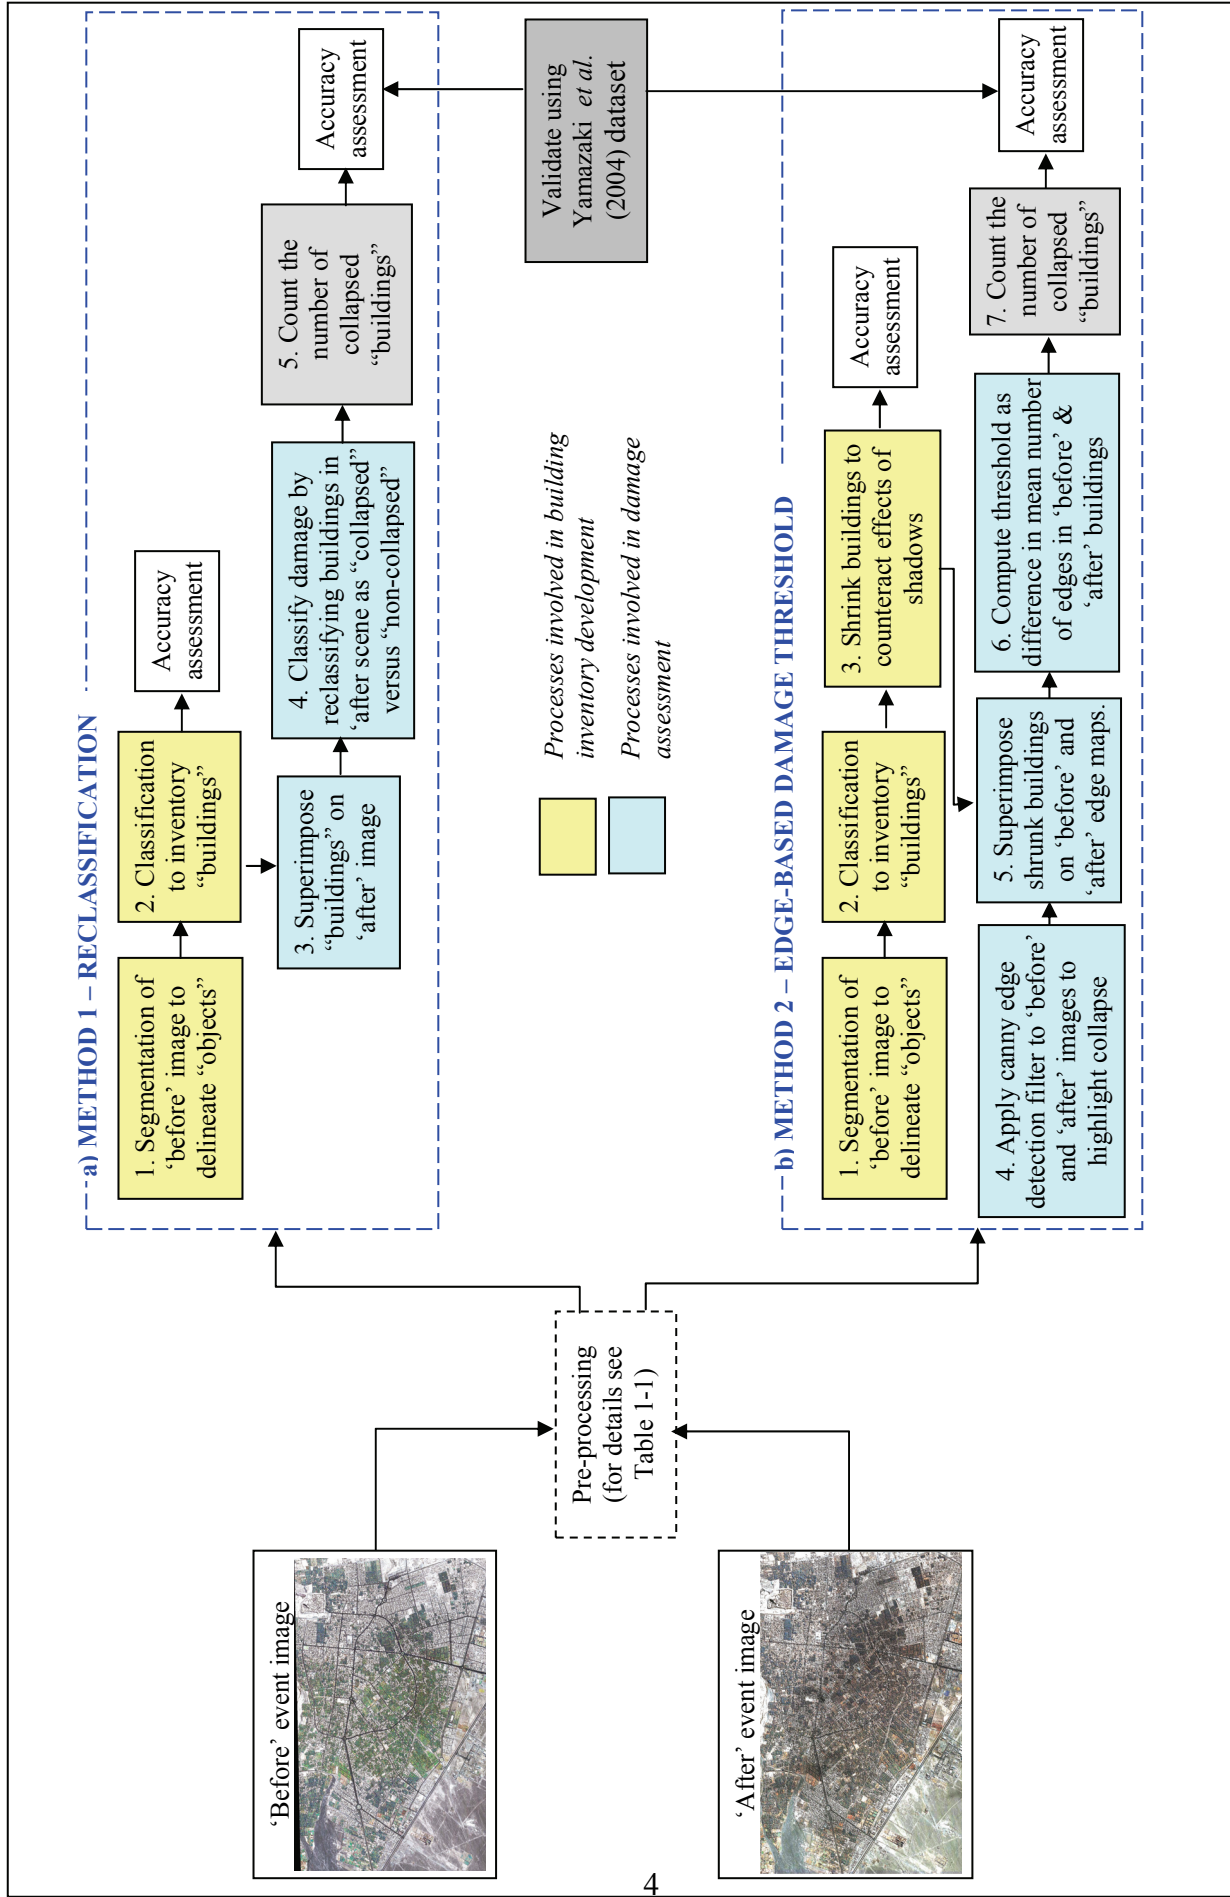



**Figure 1-1 Methodology Flow Diagram Illustrating the Two Different Techniques Investigated for Counting Building Collapse in Bam: (a) Reclassification; and (b) Edge-Based Damage Threshold.**

The object-oriented image processing techniques employed for Method 1 (reclassification) and Method 2 (edge detection) were conducted using eCognition image processing software. Although alternative segmentation algorithms (see, for example, Meinel and Nubert, 2004; also Gusella, 2006) and feature extraction programs are also available (Feature Analyst, Visual Learning System, Inc.), an evaluation of these software is reserved as a topic for future work. Pre-processing was conducted in ENVI software (RSI, 2002) and pixel-based processes such as the edge enhancement for Method 2 were completed using Matlab. Accuracy assessments were conducted using ArcGIS.

### 1.3 Datasets and Pre-Processing

From table 1-1, the Method 1 reclassification and Method 2 edge-based object-oriented techniques for assessing building collapse employ high-resolution standard product Quickbird imagery, collected before and in the immediate aftermath of the Bam earthquake. From a theoretical standpoint, building collapse is clearly visible on high-resolution remote sensing imagery of Bam (figure 1-2). Within the before image, the roofs of traditional adobe structures that typify much of the built environment, appear as homogenous bright white objects of regular shape (see figure 1-2e). Contemporary buildings are generally larger than the traditional adobe family dwellings and exhibit various roof colors that include blue (see figure 1-2b). Within the after image (figure 1-2f), for buildings that collapsed, the homogenous roof configuration is replaced by a chaotic pile of debris. There is also a dramatic change in color, with brown/grey colored debris resembling the surrounding non-developed land surface.

**Table 1-1 High-Resolution Quickbird Imagery of Bam and Pre-Processing Procedures**

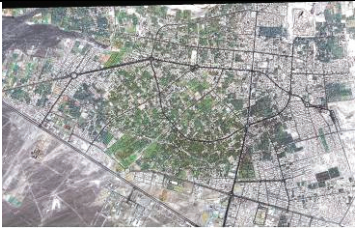Acquisition Date	Summary True Color Image	Spatial Resolution	Pre-processing steps
“Before”: 09/30/2003		0.60 m panchromatic  2.40 m multispectral	IHS pan sharpening (RGB channels), contrast enhancement (linear with 2% saturation)
“After”: 01/03/2004			IHS pan sharpening (RGB channels), contrast enhancement (linear with 2% saturation), registration to “before” using 49 control points (1.8 RMS), first order polynomial mapping function and nearest neighbor re-sampling



(a) Traditional adobe fabric



(b) Contemporary construction



(c) Aerial view of intact adobe structures



(d) Aerial view of collapsed adobe structures



(e) 'Before' satellite image of intact buildings (f) 'After' satellite image with building collapse



**Figure 1-2 Examples of Building Fabrics and Damage in Bam**



The city-wide scenes were pre-processed using the image fusion technique of true-color IHS pan-sharpening. This maximized the information content of each scene by combining the spatial detail of the panchromatic band with the spectral signatures captured by the multispectral image bands. A 2% linear stretch contrast enhancement was also employed, to optimize the pre-event appearance of built structures, and the distinction between collapse and non-collapse scenarios in the post-event scene (Liu *et al.*, 2005). To maximize spatial correspondence between the multi-temporal scenes the “after” event image was registered to the “before” image, using a series of 49 spatially distributed ground control points with a first order polynomial transformation.

The validation dataset comprises a visually-based per-building damage assessment of ~10,104 buildings within the remote sensing imagery, conducted by Yamazaki *et al.* (2004) according to the EMS98 scale (see figure 1-3):

- EMS grade 5 and grade 4 (destroyed and partially destroyed buildings); Total number of buildings counted = 5533
- EMS grade 3 and lower (Buildings surrounded by debris or undamaged); Total number of buildings counted = 4571



**Figure 1-3 Validation Dataset for Bam, Showing EMS Damage Levels 1, 3, 4 & 5. Courtesy of Yamazaki *et al.* (2004)**



## SECTION 2

### METHOD 1: RECLASSIFICATION

The flow diagram in figure 1-1a outlines Method 1: Reclassification, for counting the number of collapsed buildings in Bam. Together, the building inventory and damage assessment processes include five steps, comprising:

1. Segmentation of the ‘before’ image to identify objects that could be buildings;
2. Classification of the ‘before’ image objects to identify those that are buildings;
3. Superimposing these building footprints on the ‘after’ image to visually distinguish collapsed from non-collapsed structures;
4. Reclassification of the buildings into classes of collapse and non-collapse based on the unique spectral characteristics of these respective damage states within ‘after’ image;
5. Counting the number of collapsed structures.


The following sections describe each of these processing steps, and include details of the accuracy assessments that were conducted for the image segmentation, building classification and damage count.

Notably, this approach employs both before and after imagery, but the method of damage classification differs from ‘change detection’ analyses employed in Volume III and by Adams *et al.* (2004) and Huyck *et al.* (2004). It identifies building collapse in terms of the unique statistical characteristics of intact versus damaged structures within the “after” scene, rather than the degree of change between pre- and post-event images.

#### 2.1 Segmentation (Step 1)

For Step 1, the full extent of the Bam pre-processed ‘before’ image was segmented to group the constituent pixels into “objects”. The segmentation is performed using a multi-resolution ‘bottom up’ region-merging technique. In this context, with a multi-region approach objects of interest typically appear on different scales in an image simultaneously. The extraction of meaningful image objects needs to take into account the scale of the problem to be solved. Therefore the scale of resulting image objects should be freely adaptable to fit the scale of the task (Baatz and Schape, 1999). The technique is bottom up (opposite to top down) inasmuch that processing starts with one pixel objects and ‘in numerous subsequent steps smaller image objects are merged into bigger ones’ (Benz *et al.*, 2004).

Region growing proceeds through an optimization process, which from figure 2-1 involves three concepts: (a) color; (b) shape>smoothness; and (c) shape>compactness. The optimization procedure minimizes the heterogeneity of resulting image objects (i.e. the merge occurs that results in the smallest growth in heterogeneity). The optimization process is stopped by a scale parameter  $t$ , if the smallest growth results in an average object size that exceeds the threshold defined. The larger the scale parameter, the more objects can be merged and the larger each individual object grows before it reaches the scale threshold (Baatz and Schape, 1999; Benz *et al.*, 2004; Zhong *et al.*, 2005).

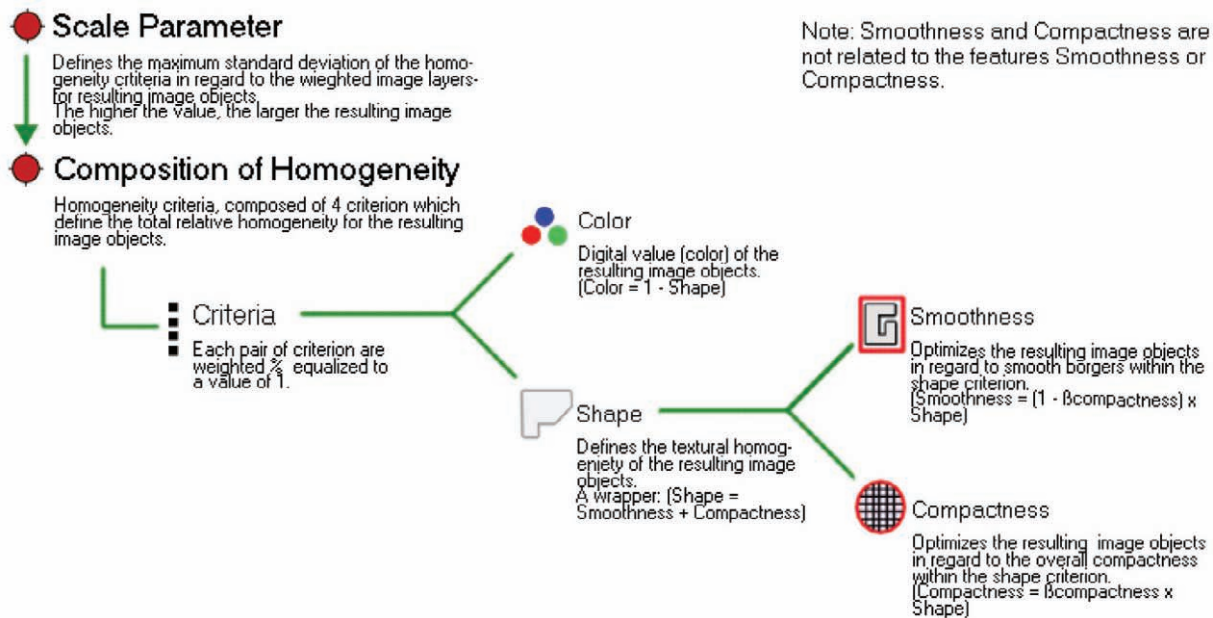

**Figure 2-1 Concept Flow Diagram for Multi-Resolution Segmentation (Definiens, 2006)**

Based on the flow diagram in figure 2-1, summary definitions and key equations for the segmentation process include (see Definiens, 2006; also Benz *et al.*, 2004; Baatz and Schape, 2000; Frauman and Wolff, 2005; Hoffman, 2001; and Zhong *et al.*, 2005):

Scale parameter (termed Scale):

An important parameter of the multi-resolution segmentation, Scale is used to determine the upper limit for a permitted change of heterogeneity throughout the segmentation process. The scale parameter determines the average image object size; the larger the scale parameter, the larger the objects. For examples of the relationship between scale parameter and object size and frequency, see Frauman and Wolff (2005).

Heterogeneity criterion

The homogeneity criterion is used to determine which heterogeneity attributes of image objects are to be minimized as a result of a segmentation run. Criteria used to describe image object heterogeneities comprise: color criterion ( $\Delta h_{color}$ ), and shape criterion ( $\Delta h_{shape}$ ). Shape encompasses smoothness and the compactness criteria. The composition of the entire homogeneity criterion is defined by assigning weights ( $w_{color}$  and  $w_{shape}$ ) to each of these criteria. The higher the shape criterion, the less spectral homogeneity influences object composition.

$$f = w_{color} * \Delta h_{color} + w_{shape} * \Delta h_{shape} \tag{2-1}$$

Color criterion

During the merging process, the color criterion represents the degree of change in spectral values within an image object. The color heterogeneity factor is defined by the standard deviation of pixel values within the regions to be merged ( $\sigma_{1c}$  and  $\sigma_{2c}$ ) and the resulting merged region ( $\sigma_{mc}$ ),

for a given spectral band or channel ( $c$ ), which are weighted by ( $w_c$ ). The numbers of pixels within each object and the merged object are given by  $n_{mc}$ ,  $n_{1c}$  and  $n_{2c}$ .

$$\Delta h_{color} = \sum_c w_c (n_{mc} \sigma_{mc}) - (n_{1c} \sigma_{1c} + n_{2c} \sigma_{2c}) \quad (2-2)$$

### Shape criterion

The shape criterion describes the change in object shape relative to weighted smoothness ( $w_{smooth}$ ) and compactness ( $w_{compact}$ ) criteria. Where the shape criterion is greater than zero, the degree of smoothness or compactness can be specified.

$$\Delta h_{shape} = w_{compact} * \Delta h_{compact} + w_{smooth} * \Delta h_{smooth} \quad (2-3)$$

### Smoothness criterion

The smoothness criterion optimizes image objects with regard to the smoothness of borders. The smoothness criterion is useful when working with very heterogeneous data, to inhibit the objects from having frayed borders, while maintaining the ability to produce non-compact objects. The degree of change in smoothness ( $\Delta h_{smooth}$ ) is a function of the ratio of the border length ( $l$ ) and the border length given by a bounding box ( $b$ ) that contains the object yet follows the line of raster pixels. Again, this measure is computed as the change between these values for the merged versus the discrete objects.

$$\Delta h_{smooth} = n_m \frac{l_m}{b_m} - (n_1 \frac{l_1}{\sqrt{b_1}} + n_2 \frac{l_2}{\sqrt{b_2}}) \quad (2-4)$$


### Compactness Criterion

In a raster image, the ideal compact form of an object is a square. The compactness criterion minimizes the deviation from the ideal compact form. The degree of change ( $\Delta h_{compact}$ ) is a function of the ratio of the border length ( $l$ ) and the square root of the number of pixels within the separate and merged objects.

$$\Delta h_{compact} = n_m \frac{l_m}{n_m} - (n_1 \frac{l_1}{\sqrt{n_1}} + n_2 \frac{l_2}{\sqrt{n_2}}) \quad (2-5)$$

These parameters co-vary within the eCognition processing environment. In addition to the segmentation-related variables, figure 2-2 shows that the input bands may also be weighted to vary their importance for the result obtained. This flexibility may be significant where different genres of input data are used, such as spectral bands versus a DEM (Hofmann, 2001). Given the exploratory nature of the present study and sole use of spectral information, an equal weighting was applied to all bands.




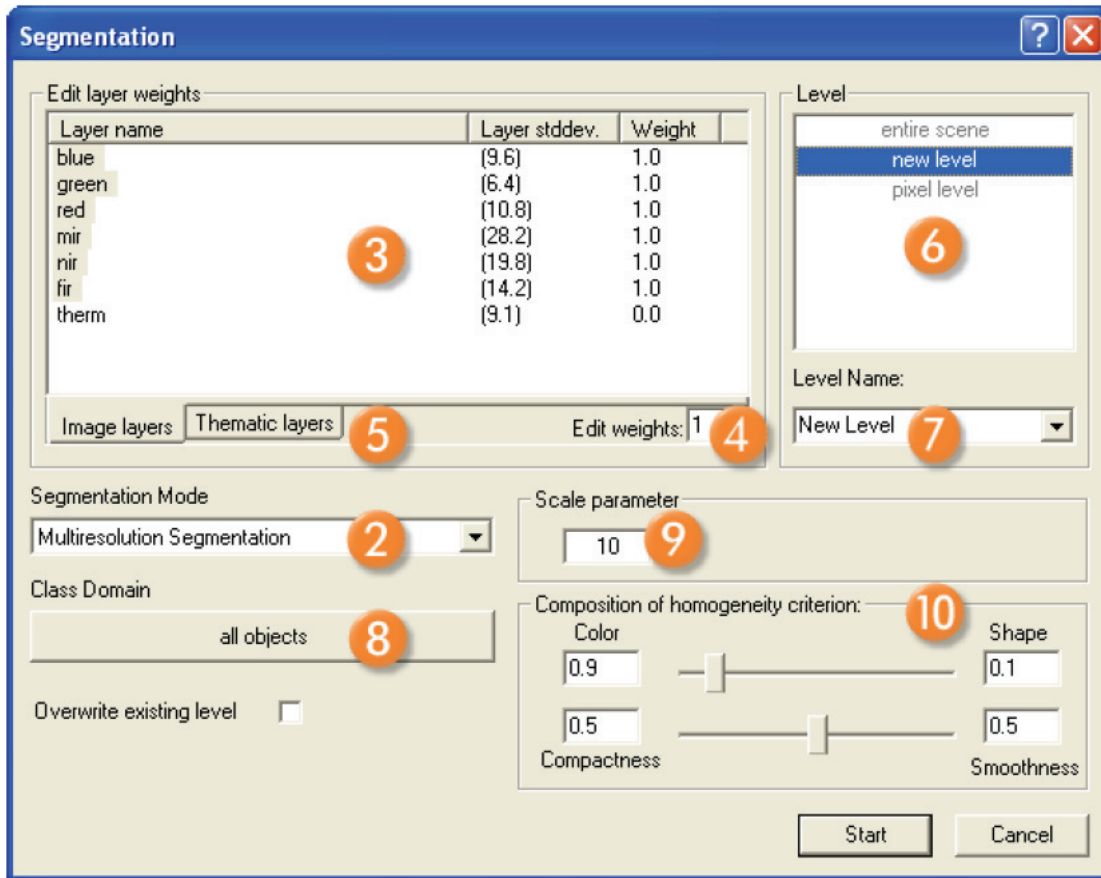

**Figure 2-2 E-Cognition User Interface for Multi-Resolution Segmentation Parameter Specification. Objects of Interest are Identified by Varying Scale, Color and Shape Criteria.**


For multi-resolution segmentation, a wide range of different results are possible depending on the input parameters used. For any given application, an important requirement is therefore to define an optimum combination of parameters that extracts objects of interest (in this case, buildings). The objective for this research was to identify a single set of segmentation factors that could extract objects relating to buildings applicable on a *scene-wide basis*. The premise here is that the building stock throughout Bam is relatively homogenous in terms of composition and spatial configuration; the investigation of intra-scene variations in parameter specification for object delineation is a topic for future research.

In defining an optimum set of parameters, as Hofmann (2001) notes, there is an added level of complexity, since the results of image segmentation depend strongly on the inherent characteristics of the image data itself. Thus, it is difficult to develop generalized rules for object-extraction based on previous research that use alternate imagery sources or focus on other geographic locations. Accordingly, the present study employs an iterative testing process to define an optimum set of segmentation parameters. In order to select suitable segmentation parameters, a set of 'ground truth' digitized buildings (see, figure 2-3a) are compared with the segmentation results (figure 2-3b). The ground truth data were obtained by manually digitizing a sample of 108 adobe buildings of varying shape and size, randomly distributed throughout the image.

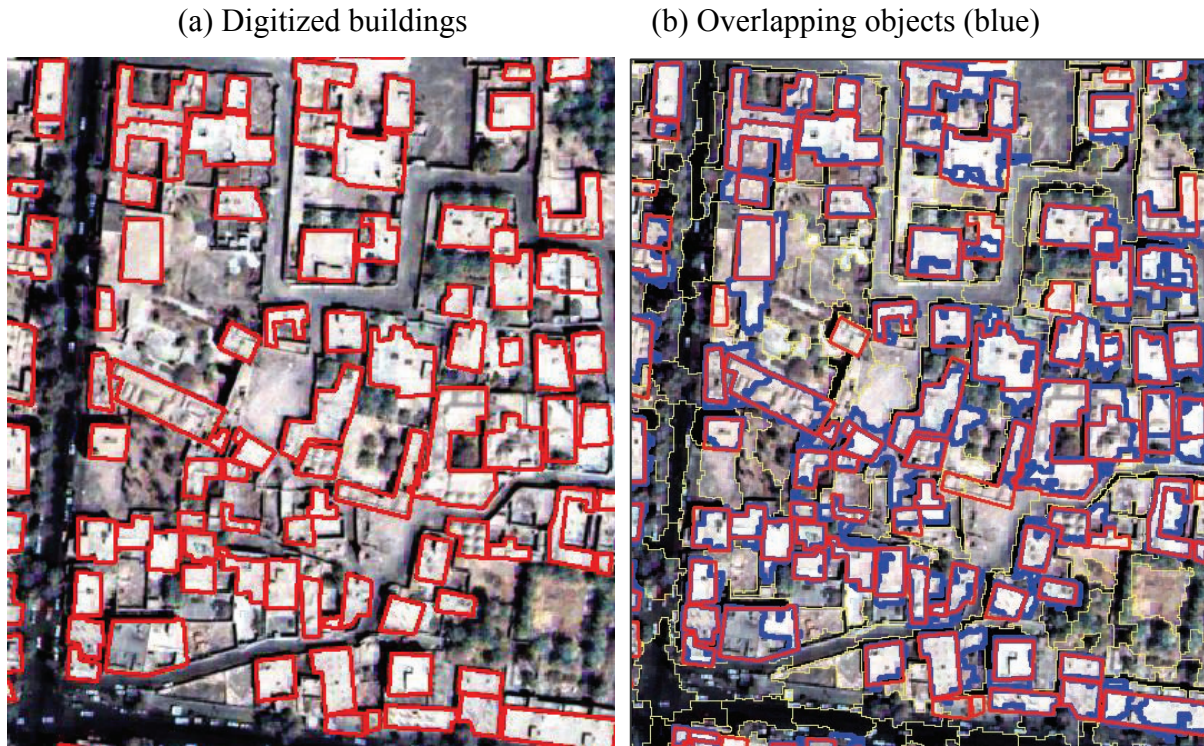


**Figure 2-3 Example of Digitized Buildings and Correspondence with Overlapping Objects Evaluated for Segmentation Parameter Optimization in Bam. Segmentation Parameters Used were Scale = 30, Color = 0.1, Shape>Smoothness = 1**

A range of different permutations of color, shape and scale segmentation parameters were tested for Bam. Segmentation results for various permutations of these parameters were compared with the digitized “ground truth” footprints (figure 2-4). The segmented objects were overlapped with the digitized set, and the degree of correspondence computed. The ideal case is 1:1 object:building footprint correspondence. If this is achieved, the total number of objects identified within the image matches the true number of ground surface features. A 1:1 correspondence was assumed where there was >50% overlap between the area of the segmented object and the digitized building. Performance was assessed qualitatively for color and shape criterion through visual inspection, and quantitatively for Scale.

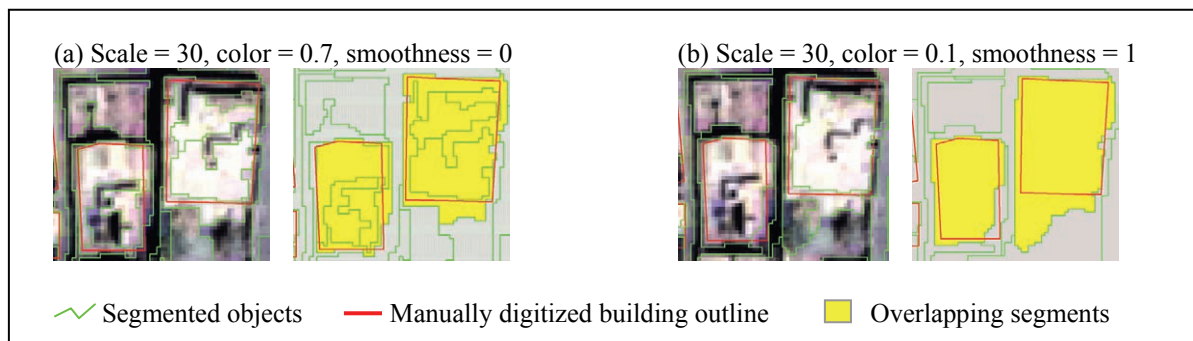

**Figure 2-4 Comparison Between Objects Delineated Using Different Spectral and Smoothness Segmentation Parameters**

In the case of Scale, figure 2-5 shows how, in theoretical terms, segmentation-based object recognition can affect the count of buildings. With scenario (a) ‘perfect fit’, for each object there is a 1:1 correspondence; in scenario (b) “object fragmentation”, two buildings fall within only one object; in scenario (c) “building fragmentation”, two objects are recognized within a single building; and scenario (d) is a combination of (b) and (c). The performance of different scale measures was measured in terms of the occurrences of 1:1 object:building correspondence (Scenario a), and building split (Scenario c).

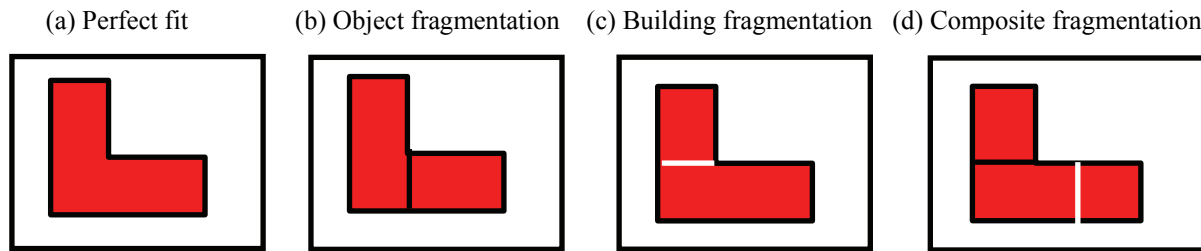

**Figure 2-5 Segment (Red Areas Divided by White Line) and Digitized Object (Black Line) Correspondence. Segmentation Scenarios: a) Perfect Fit; b) Object Fragmentation; c) Building Fragmentation; and d) Object & Building Fragmentation.**

## 2.2 Building Classification (Step 2)

The classification process in eCognition may utilize either physical or semantic characteristics of the segmented objects (for details, see Hofmann, 2001). For Step 2 of the methodology (see figure 1-1a), segmented objects spanning the full extent of the ‘before’ image were divided into physically-based classes of:

1. Building
2. Not building
3. Shadow
4. Vegetation

In order to train the segment-based supervised classification, a sample of training objects for each class was manually selected throughout the image. A single class for ‘building’ was employed due to the concentration of adobe structures in Bam, exhibiting similar roof characteristics. Studies focusing on more diverse building stock and roof types (see for example, Herold *et al.*, 2002) instead employ a range of classes. A supervised standard nearest neighbor classification was implemented using eCognition software. This is a deterministic approach to classification, which crisply assigns each object to a given class based on a proximity measure to the feature space (see, for example, Wei *et al.*, 2005). It is the most straightforward classification option available, which was deemed appropriate, given the exploratory nature of this research.

Although not employed here, eCognition also offers several more sophisticated classification options. The advanced nearest neighbor option enables a different image feature to be used to define each class, such as spectral versus area-based (see, for example, Herold *et al.*, 2002). The eCognition ‘fuzzy’ classification methodology enables a broad range of different features



including spectral signatures and variables relating to shape, texture, hierarchical and neighborhood properties, to be used for class definition. It returns statistics showing the probability on a scale of 0-1 of each object belonging to a given membership class (Hofmann, 2001; Benz *et al.*, 2004; Chen *et al.*, 2005; Liu *et al.*, 2005). For a theoretical overview of fuzzy classification in urban areas, see Shackelford and Davis (2003). Investigating the performance of these classification algorithms for post-disaster damage classification remains a topic for future research.

The classification was conducted, with image objects assigned to a best-fit class according to an exponential membership function. Within eCognition, the feature vector that underpins the classification comprises spectral and textural (standard deviation of pixel values within the object) characteristics of the training objects (for details, see Definiens, 2004). An accuracy assessment was performed, using a simple random sampling scheme (Congalton, 1982), based on a subset of 327 objects. The classified and actual classes were observed for each object, and a confusion matrix constructed.

### **2.3 Damage Detection (Step 3 and Step 4)**

For methodological Step 3 (figure 1-1a), the objects previously classified as ‘buildings’ using the ‘before’ image were superimposed on the ‘after’ scene. To distinguish between collapsed versus non-collapsed structures (Step 4), the superimposed ‘after’ image buildings were re-classified with a training set of damaged and non damaged objects from the buildings class, using a standard spectrally-based supervised nearest neighbor approach.

The premise here is that within the ‘after’ scene, collapsed structures have different statistical characteristics compared with the non-damaged case. This assumption appears to be reasonable, based on the distinctive optical characteristics of these damage states within the satellite imagery, and also field-based photographs; from figure 1-2, intact adobe buildings are characterized by homogenous and bright/white domed or flat rooftops. In contrast, the collapsed structures appear as chaotic piles of debris, of a subdued color that is similar to the surrounding soils.

Alternative damage detection techniques are documented in the literature, which may be explored as part of future research activities. They include a building damage index, which compares the area occupied by a given structure in the before and after scenes (Stasolla *et al.*, 2006), a correlation index, PCA index and boundary compactness index (Hutchinson and Chen, 2005). Blaschke (2004) proposes an area/perimeter based change detection methodology, which although applied to the general concept of landuse change could be applicable to damage detection.

### **2.4 Counting the Number of Collapsed Buildings (Step 5)**

Finally, the occurrence of collapsed buildings was computed based on the total number of structures identified during the building classification in Step 2, the damage detection re-classification result and accuracy level.



## SECTION 3

### RESULTS 1: RE-CLASSIFICATION

#### 3.1 Segmentation


The Step 1 segmentation results exhibited limited sensitivity to variations in smoothness, since buildings are typically compact compared with roads, for example, which are elongate. However, color proved to be an important factor for extracting roof structures from the ‘before’ image. When the contribution of spectral information is high, the segmentation results are highly fragmented, because the detail captured within individual roofs by the high-resolution produces an irregular fractal shape with several segments falling within a given roof. Reducing the influence of color improves the result by accommodating slight variations in reflectance and minor areas of shadowing within the roof, producing segments that correspond closely with the building outline.

Figure 3-1 provides a graphical representation of the results for Scale. In figure 3-1a, a Scale of 30 achieves close correspondence between the total building count and the sample of 108 digitized footprints. Although there is a shortfall in 1:1 object:building correspondence, from figure 3-1b, this occurs because of building split. Figure 3-1a shows how, when this split is taken into account, values for the building count (total buildings) and number of digitized footprints converge. Visual inspection of the nature and spatial distribution of building split suggests that these deviations from 1:1 object:building correspondence are attributable to intra-scene variation in building stock composition and configuration. A final segmentation parameter set comprising scale = 30, color = 0.1, shape>smoothness = 1, was employed for the before event image.

#### 3.2 Building Classification (Step 2)

From table 3-1a, the Step 2 classification of objects within the segmented ‘before’ image identified a total of 22,865 ‘buildings’. For the accuracy assessment, the accompanying confusion matrix shows the degree of correspondence between classified and digitized buildings for the random test set of 327 objects. The accuracy for the whole classification (diagonal of the confusion matrix divided by the total number of sample objects) is 82.8%. In the case of buildings, a total of 49 test objects were classified as buildings, compared with the ‘true’ occurrence of 43. From the ‘reduced’ confusion matrix in table 3-1b, these correspond with a ‘User accuracy’ of 80% and ‘Producer accuracy’ of 91%. (Congalton, 1982)

While the object-oriented technique employed here successfully identifies buildings within Bam, as previously observed during the segmentation step, heterogeneity within the building stock causes a number of instances where the 1:1 object:building footprint relation does not apply. The mitigation of this offset through techniques such as intra-scene segmentation optimization will constitute a significant refinement to this methodology, and as such is a major focus for future research. However, for the present study, an adjustment factor is employed to finalize the count of structures in Bam.

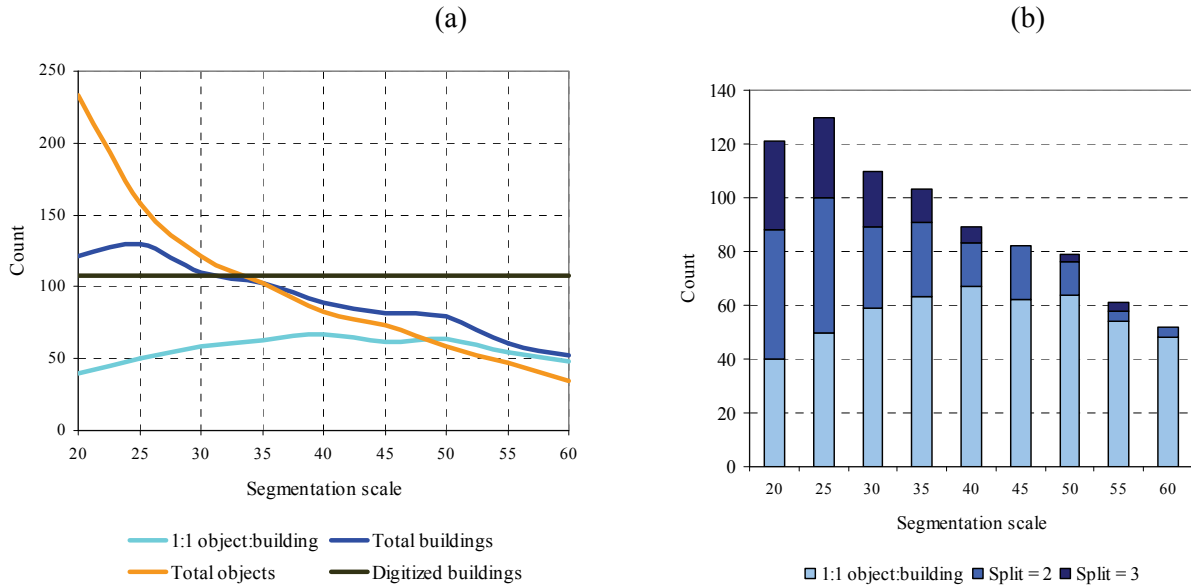

**Figure 3-1 Evaluation of Segmentation Scale Factor for a Sample of 108 Digitized Buildings. (a) Correspondence Between Digitized Building Footprints, Segmented Buildings and Objects Using Scale Factors Spanning 20-60. 1:1 Object Building Indicates the Number of Buildings Uniquely Selected for a Given Object. Total Buildings Indicates the Number of Buildings Matched. However, a Given Building May Contain Multiple Objects. Total Objects Indicates the Number of Objects Corresponding with a Building. However a Given Object May Contain Multiple Buildings. (b) Occurrence of Building Fragmentation Scenarios.**

**Table 3-1a Confusion Matrix for Building Classification Using the ‘Before’ Imagery. The Total Number of Objects within each Class is also Shown, Together with the Number of Training Samples Used.**

Reference/Classification	Number of training samples	Number of objects	Building	Not Building	Shadow	Vegetation	Total	User Accuracy
Building	157	22,865	39	10	0	0	49	0.80%
Not Building	274	54,875	4	154	0	6	164	0.94%
Shadow	15	7,118	0	1	7	2	10	0.70%
Vegetation	72	36,732	0	15	6	71	92	0.77%
unclassified	-	4,272	0	10	0	2	12	
Total	518	125,862	43	190	13	81	327	
Producer Accuracy			0.91%	0.81%	0.54%	0.88%		

**Table 3-1b ‘Reduced’ Confusion Matrix (Czaplewski, 1992), Showing “User” and “Producer” Classification Accuracies (Congalton, 1982) for Classes of ‘Building’ and ‘Other’ (Not Building, Shadow and Vegetation).**

Building Inventory				Accuracy assessment			
	Number of objects & proportion (%)	Interim count (equation [1])	Inventory count (89% reduction)	Building	‘Other’	Total	User accuracy
Building	22,865 (18.1%)	21,144 (16.8%)	18,872	39	10	49	80% (39/49)
‘Other’	102,997 (81.9%)	104,718 (83.2%)	-	4	274	278	98% (274/278)
Total	125,862	125,862	-	43	284	327	
Producer accuracy				0.91% (39/43)	0.96% (274/284)		


First, the marginal probability approach employed by Czaplewski (1992) was used to adjust the number of objects classified as building. In Equation 1,  $x$  is the true proportion of classified buildings (the unknown),  $y$  is the estimated proportion of the building class (from classification),  $H_a$  is the Producer building classification accuracy and  $H_b$  is the Producer classification accuracy for ‘other’ classes (see table 3-1b).

$$y = x H_a + (1-x) (1-H_b) \quad (3-6)$$

From table 3-1b,  $y = 0.18$  (the ratio of classified buildings to total objects).  $H_a = 0.91$  and  $H_b = 0.96$ . The actual proportion of classified buildings is computed as  $x = 0.17$ , producing an interim inventory count of 21,144. Secondly, the object count was adjusted by the object fragmentation factor for Scale = 30 (figure 3-1a). The interim count was reduced by 89% (121 total objects corresponding with 108 buildings digitized). Accordingly, the total building inventory in Bam is calculated as 18,872. This is an overestimate compared with the number of observations contained within the Yamazaki *et al.* (2004) database of 10,104. Reasons for the overestimation require further investigation, but are likely to be in part due to inaccuracies introduced at the segmentation stage when a given building may contain multiple objects. They also point to limitations of using a single set of segmentation parameters for extracting all buildings within a given city. Methodological challenges associated with using a spatially varied set of parameters attuned to the building size and shape requires further investigation.

### 3.3 Damage Detection (Step 3 and Step 4)

When superimposing the ‘before’ image building outlines with the ‘after’ image (figure 3-2), visual inspection of buildings that remained standing suggests that the registration process generally achieved a close correspondence between their footprints on the pre- and post-event coverage. A small margin of offset (on the order of 2-3 pixels) was evident between the location of some outer walls, apparently due to multi-temporal variability in shadowing and sensor look angle.

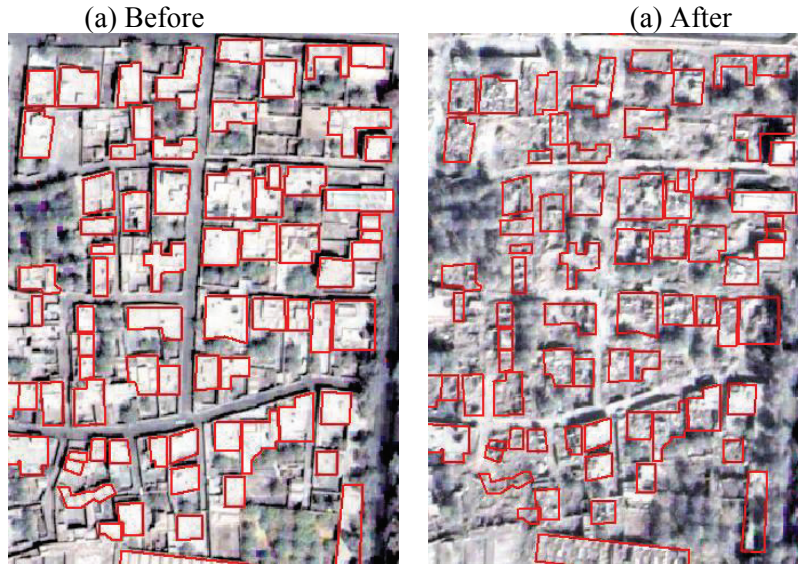


**Figure 3-2 Minor Offset in Image Registration, Illustrated by Overlaying ‘Before’ Image Building Outlines with the ‘After’ Image**

Figure 3-3 shows results for the city-wide re-classification, where a nominal 40% of objects were classified as collapsed. To assess the accuracy of the building damage classification, a sample comprising 136 buildings (see Congalton, 1982) was selected and their respective classified and observed damage states recorded. The confusion matrix in table 3-2 shows results for the accuracy assessment, which was conducted using 136 samples from the Step 2 building class. A total of 24 objects were rejected from the confusion matrix, because they were misclassified from building to ‘other’. For the remaining samples, the re-classification achieved an accuracy of 70.5%.

**Table 3-2 Results for the Damage Re-Classification and Count of Collapsed Buildings. The Confusion Matrix for the Accompanying Accuracy Assessment Shows the “Producer” Classification Accuracy (Congalton, 1982) Used to Compute the Final Count.**

Damage Detection						Accuracy assessment			
	Training Sample	Objects classified	%	Buildings classified	Final count (eq [3-6])	Collapsed	Not damaged	Total	User Accuracy
Collapsed	174	8,458	40	7,549	6,473 (34.3%)	44	12	56	78.5%
Not damaged	206	12,686	60	11,323	12,399 (65.7%)	21	35	56	62.5%
Total		21,144	100	18,872	18,872	65	47	112	
Producer accuracy						67.4%	74.4%		

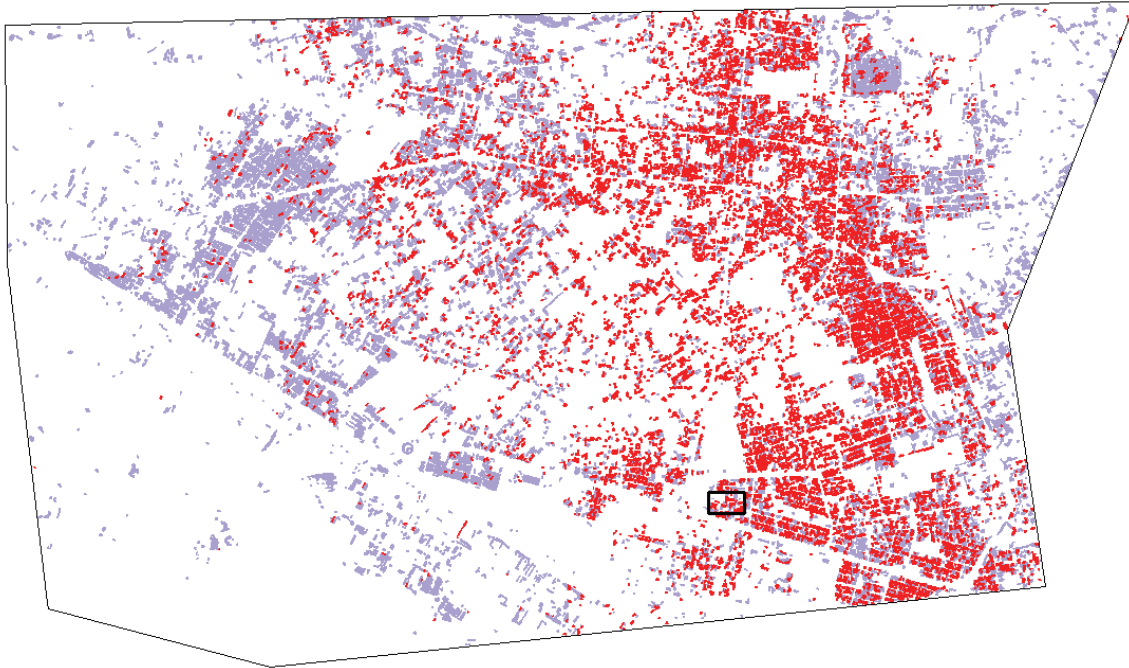

**Figure 3-3 Building Damage Map for the City of Bam, Based on Object-Oriented Analysis of Quickbird Imagery Captured Before and After the Event. Collapsed Structures are Shown in Red and Non-Collapsed in Blue.**

### **3.4 Counting the Number of Collapsed Buildings (Step 5)**

The proportion of objects classified as collapsed buildings (table 3-2) was adjusted to 34.3% according to the marginal probability approach employed by Czaplewski (1992). Accordingly, the final count of collapsed buildings was calculated as 6,473. Compared with the validation dataset developed by Yamazaki *et al.* (2004), this technique overestimates the number of visually collapsed or partially collapsed structures by 17%.





## SECTION 4

### METHOD 2: EDGE-BASED DAMAGE THRESHOLD

The methodology flow diagram in figure 1-1 outlines Method 2: Edge-based damage threshold, for counting the number of collapsed buildings in Bam. Together, the building inventory and damage assessment processes include seven steps, comprising:


1. Segmentation of the ‘before’ image to identify objects that could be buildings
2. Classification of the ‘before’ image objects to identify those that are buildings
3. Shrinking the building footprints to avoid issues of shadow and look angle variation around the edges
4. Filtering the ‘before’ and ‘after’ images using an edge detection operator to highlight building collapse
5. Superimposing the shrunk building footprints on the before and after edge-enhanced images
6. Computing a threshold difference in the number of edges within the before and after shrunk footprints.
7. Counting the number of collapsed structures.

Step 1 and Step 2 of this methodology employs the same datasets and procedures as the Method 1: Re-classification approach (see Section 2.1 and Section 2.2). As such, details of these processes are not repeated here. Step 3 through Step 7 are described in the following sections, together with details of the accuracy assessments that were conducted for the damage count.

Compared with Method 1, this approach employs a more traditional ‘change detection’ technique (see Volume III), assessing the number of collapsed buildings in terms of characteristic differences between collapsed and intact buildings within the before and after images. However, it is novel inasmuch that damage is assessed in terms of the change in occurrence of edge pixels, oppose to other measures such as dissimilarity/texture that have previously been employed (see Huyck *et al.*, 2004; and Gusella, 2006).

#### **4.1 Shrinking the Building Outlines (Step 3)**

Visual inspection of the ‘before’ and ‘after’ images indicate that non-disaster related differences are present, which may be a source of inaccuracy in the identification of building collapse when using a change detection methodology. From figure 4-1, the spectral characteristics of non-damaged buildings vary around the margins of the roof. This fundamental difference is due to minor registration errors, and changes in acquisition angle and illumination conditions and direction at the time of image acquisition (table 4-1). Other sources of change may include variations in the spectral characteristics of the roof where the building was imaged by two discrete sensors such Quickbird and IKONOS operating at slightly different wavelengths, or where different processing techniques have been applied prior to data delivery (for example, the pansharpener algorithms in Section 1.3).

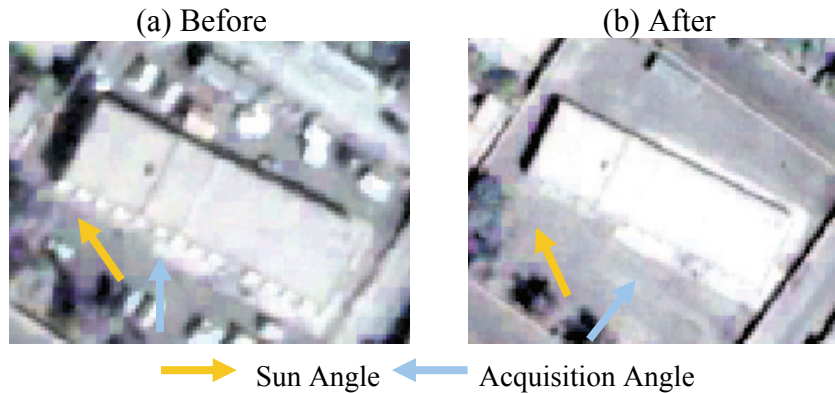


**Figure 4-1 Changes Between the Spectral Characteristics Around the Margins of a Non-Damage Roof for (a) Before and (b) After Quickbird Images of Bam. Differences are Due to Variations in Acquisition Angle and Illumination Conditions.**

**Table 4-1 Acquisition and Illumination Characteristics of Bam Quickbird Images**

Date	Sun Azimuth	Sun Elevation	Satellite Azimuth	Satellite Elevation
09/30/2003	145.3	53.0	188.0	79.6
01/06/2004	155.5	34.1	234.1	64.3

To minimize the effect of these anomalous differences in spectral characteristics around the roof margin, and reduce their impact as a source of error in the change detection process, a shrinking algorithm was applied to the building outlines. Shrinking involved globally reducing the size of each building footprint, so that it no longer overlaps with the roof margin. Figure 4-2 illustrates the impact of shrinking for a group of three structures affected by different levels of shadowing around the roof margin. In figure 4-2a, the outline encompasses the roof extent. After overlaying the same outline with the co-registered ‘after’ scene (figure 4-2b), shadowing to the north of the structure is now included. In contrast, the shrunk footprint only considers the inner portion of the roof, which if collapsed, should provide a representative spectral signature of damage that is non-biased by shadow. Several different levels of shrinking were explored, ranging from  $0.6\text{m} < \text{shrinkage} < 1.8\text{m}$ .

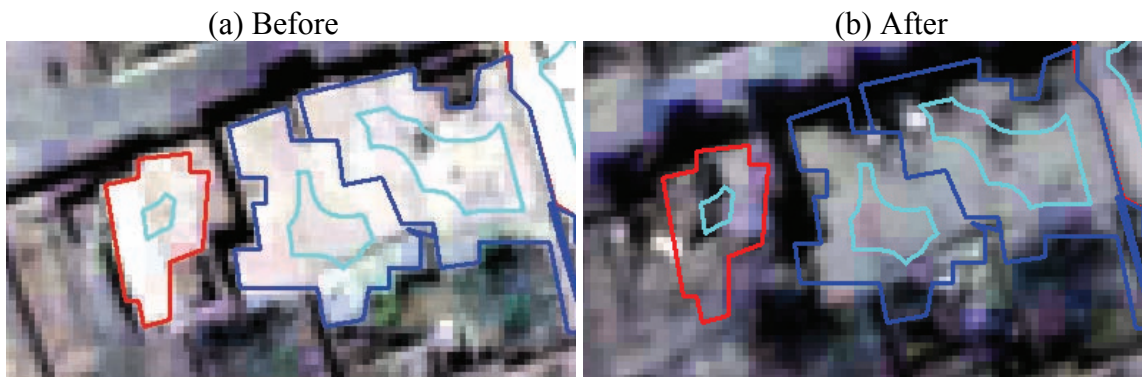

**Figure 4-2 Use of Building Shrinkage to Mitigate the Effects of Shadow Differences Between Before and After Images, which Affect the Accuracy of Damage Detection**

## 4.2 Edge Detection Filtering (Step 4)

In an image processing context, edges occur where there is an abrupt “jump” in intensity from one pixel to the next. Algorithms such as Laplacian and Sobel have been developed for edge detection, based on convolution filters. The Canny edge detection algorithm (Canny, 1986) is known as the optimal edge detector. First, it smoothes the image to eliminate noise. It then computes the image gradient to highlight regions with high spatial derivatives. The algorithm then tracks along these regions and suppresses any pixel that is not a maximum. The gradient array is now further reduced by a process of hysteresis, to track non-suppressed pixels. Hysteresis uses two decision rules to create a binary output of edge versus non-edge: (1) if the magnitude is below the threshold, it is set to zero (a non-edge); and (2) if the magnitude is above the threshold, it is set to one (an edge).

In the case of Bam, the Canny edge detection filter (Canny, 1986) is explored as a tool for identifying unique characteristics of collapsed versus non-collapsed buildings. A 17x17 filter was applied to the pre-processed input images.

## 4.3 Superimpose Shrunk Buildings and Compute Damage Threshold (Step 5 and Step 6)

The shrunk building outlines were superimposed with the ‘before’ and ‘after’ Canny-filtered images. For each shrinkage scenario, an empirical approach was used to identify the optimum threshold level, involving a random subset of 74 building outlines. The actual damage state of these structures was determined through visual inspection of the satellite imagery, resulting in a count of 43 collapsed and 31 non-collapsed buildings.

The edge-based damage index was calculated according to Equation 4-1. The frequency of edge pixels falling within the outlines was computed ( $e$ ). The total number of pixels ( $t$ ) within the outline was also measured.  $b$  is the before image,  $a$  is the after image, and  $i$  represents each individual outline within the sub-sample of 74 ( $1 < i < 74$ ).

$$E = \frac{e_{ai} - e_{bi}}{t_{ai} - t_{bi}} \quad -1 < E < 1 \quad (4-1)$$

A series of difference thresholds ( $D$ ) spanning the range  $-1 < D < 1$  were tested to find the optimum value that when applied to the 74 results for the damage state index, achieved the highest degree of correspondence between the predicted and actual damage state. If the magnitude of the actual value of the damage state index is below the threshold being tested, the result is set to ‘non-collapsed’. If the actual magnitude is above the threshold, it is set to ‘collapsed’. Results using the test threshold were compared with the actual damage state (collapsed versus non-collapsed) and the percentage of correctly classified outlines computed. Finally, a confusion matrix was constructed for each threshold and for each level of building shrinkage, and the results expressed graphically. Using the optimum threshold value, all building objects within the ‘after’ image were classified as collapsed or non-collapsed. Finally, the accuracy achieved by this threshold classification was evaluated using a set of 163 randomly selected buildings.

To understand the edge-based characteristics associated with building damage in further detail and their influence on threshold levels and accuracy, additional analysis of the relationship between edge pixel frequency and damage state was conducted. Figure 4-3 shows a sample area with the assessed damage levels color coded by severity using the validation dataset developed by Yamazaki *et al.* (2004). The frequency of edges within the ‘before’ and ‘after’ building outlines was evaluated for each EMS98 damage level for masonry structures, and statistical characteristics computed.



**Figure 4-3 Example of Visually-Assessed EMS98 Damage Levels Overlaid with the ‘After’ Image**

#### 4.4 Counting the Number of Collapsed Buildings (Step 7)


After applying the optimum damage threshold, the occurrence of collapsed versus non-collapsed buildings was computed. The output frequency statistics were compared with the validation data developed by Yamazaki *et al.*, (2004)

## SECTION 5 RESULTS 2: EDGE-BASED DAMAGE THRESHOLD

Results for Step 1 and Step 2, which are identical to those employed for Method 1, are described in Section 3.1

### 5.1 Shrinking the Building Outlines (Step 3)

Figure 5-1 illustrates the effect of imposing a shrinking routine on the edge detection process. In the ‘before’ image, the building outline corresponds precisely with the zero shrinkage limit. However, in the ‘after’ scene, the equivalent shrinkage limit appears offset in relation to the outline. For example, in the upper left corner (highlighted in red) pixels for the building outline now fall within the zero shrinkage boundary, and as such would contribute to a damage calculation based on edge pixel frequency. Shrinking helps to minimize this source of error. In the present example a shrinkage margin of 1.2 significantly reduces the occurrence of outline pixels in the ‘after’ boundary. However, accuracy results found a margin of shrinkage = 0.6 to produce the best results.

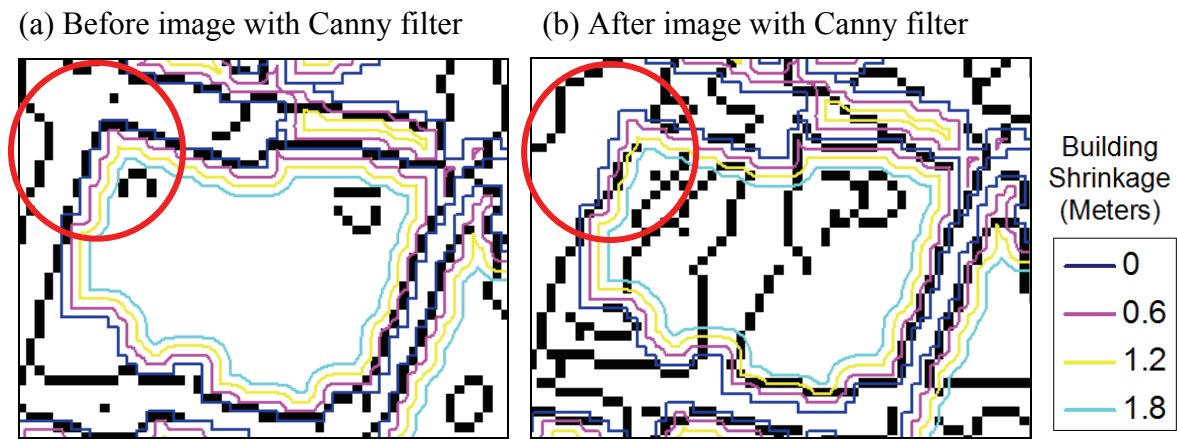


**Figure 5-1 The Effect of Implementing Building Shrinkage by 0.6m, 1.2m and 1.8m when Computing the Frequency of Edge Pixels. This Example is for a Non-Collapsed Structure. The Red Annotation Highlights an Area of Discontinuity Between the Before and After Scenes where Pixels from the Building Outline Now Fall Within the Footprint, and as such would be Wrongly Included in a Damage Calculation.**

### 5.2 Edge Detection Filtering (Step 4)

Within the before event image (figure 5-2a), the edges represent the building’s boundary walls, coupled with minor details within the roof. In the ‘after’ event scene (figure 5-2b), collapsed structures are replaced by a chaotic jumble of edges corresponding with the debris pile. Buildings that are still standing remain delineated, often with some changes may be evident within the roof expanse, where minor damage has occurred. Comparing the Canny-filtered



scenes, there is an increase in the density of edges within collapsed versus non-collapsed buildings (figure 5-2c and 5-2d).

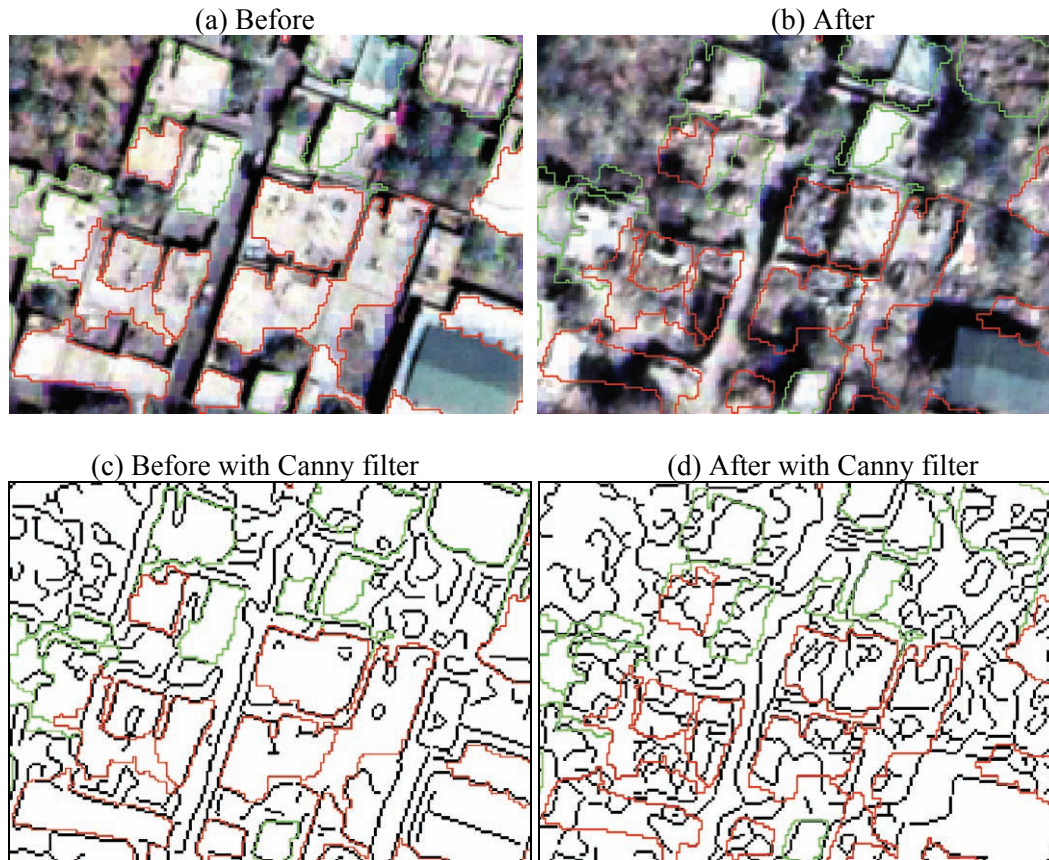


**Figure 5-2 (a) Before Event Image; (b) After Event Image; c) 17x17 Canny Filtered Before Image; and d) 17x17 Canny Filtered After Image. Building Outlines are Superimposed, with Non-Collapsed in Green and Collapsed in Red.**

### 5.3 Superimpose Shrunk Buildings and Compute Damage Threshold (Step 5 and Step 6)

Figure 5-3 shows the results obtained when assessing the optimum threshold for the edge-based damage index. Comparing the responses for shrinkage levels of  $0 < \text{shrinkage} < 1.8$  suggests that pixels associated with the building outline exert a significant influence on the results obtained. Considerable variability is evident between the accuracies achieved because factors such as co-registration errors and differential shadowing and illumination between the ‘before’ and ‘after’ images play a role. By reducing the influence of border pixels in the edge-based damage index through shrinking, the maximum accuracy level achieved increased from 65% (for a threshold of  $D = -0.03$ , building shrinkage = 0m) to 75% ( $D = 0.04$ , building shrinkage = 0.6 m).

A value of  $D = 0$  represents the situation of no change in the occurrence of edge pixels between the ‘before’ and ‘after’ scenes. In this instance, the optimum threshold was identified as  $D =$


0.04. Positive values occur when the number of edge pixels is higher in the ‘after’ compared with the ‘before’ scene. This result therefore suggests that collapsed structures are often associated with a substantial increase in edge pixels. However, it is also true that all values in the range  $0 < D < 0.04$  are, to a degree, indicative of an increase in edges. It is theorized here that values of  $0 < D < 0.04$  may be indicative of lower damage states, which cause an increase in edge occurrence between the ‘before’ and ‘after’ images, but to a lesser degree than for collapsed buildings.

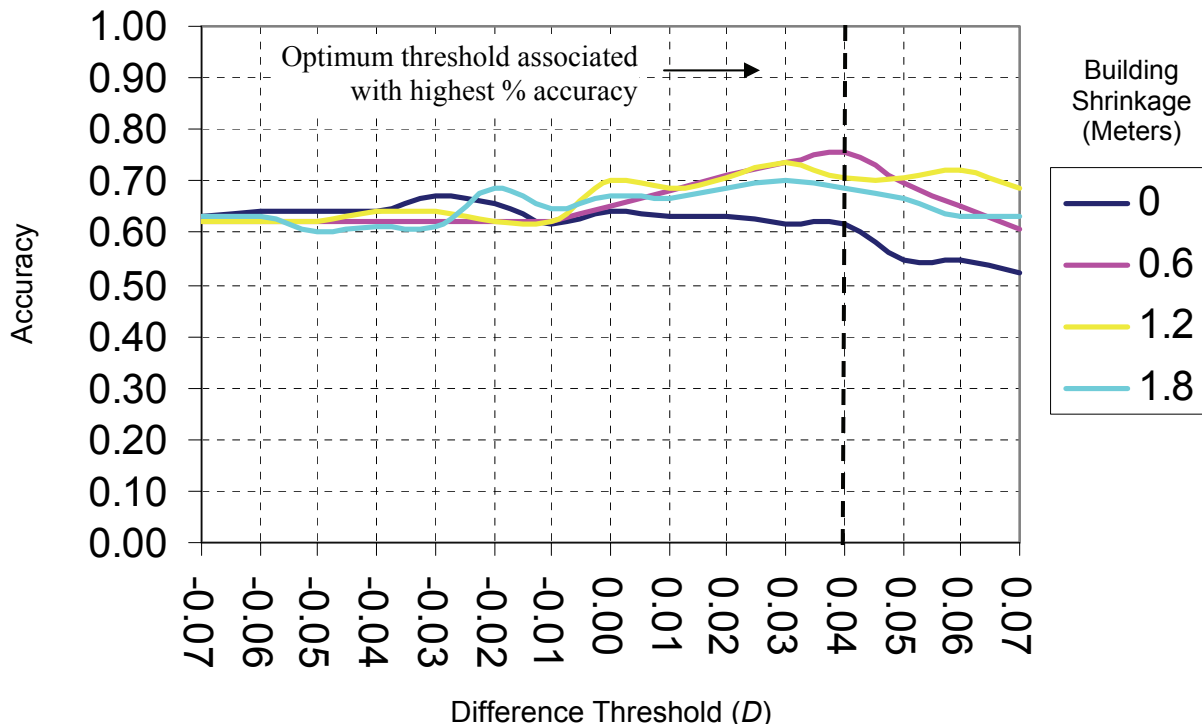

**Figure 5-3 Threshold Evaluation for the Edge-Based Damage Index**

In order to better understand the relationship between edge occurrence and intermediate damage levels, edge statistics were correlated with validation data classified according to the EMS98 damage scale, provided by Yamazaki *et al.* (2004). Figure 5-4 shows how the frequency of edge pixels changes with EMS98 damage severity. In the before image, edge frequency within the buildings is fairly consistent between all damage states. However, in the after scene, the % frequency of edge pixels consistently increases with damage state. Figure 5-5 goes on to demonstrate the differing responses within the before and after scenes for buildings sustaining a given damage state. For both damage states, the average occurrence of edge pixels is higher within the after compared with the before scene. However, the margin is wider for Level 5 versus Level 2, which results in higher difference values. This finding provides further support for the hypothesis that damage states EMS98 1-4 are associated with an increased number of edges, although their frequency is lower than for EMS98 level 5.

(a) 'Before' Image

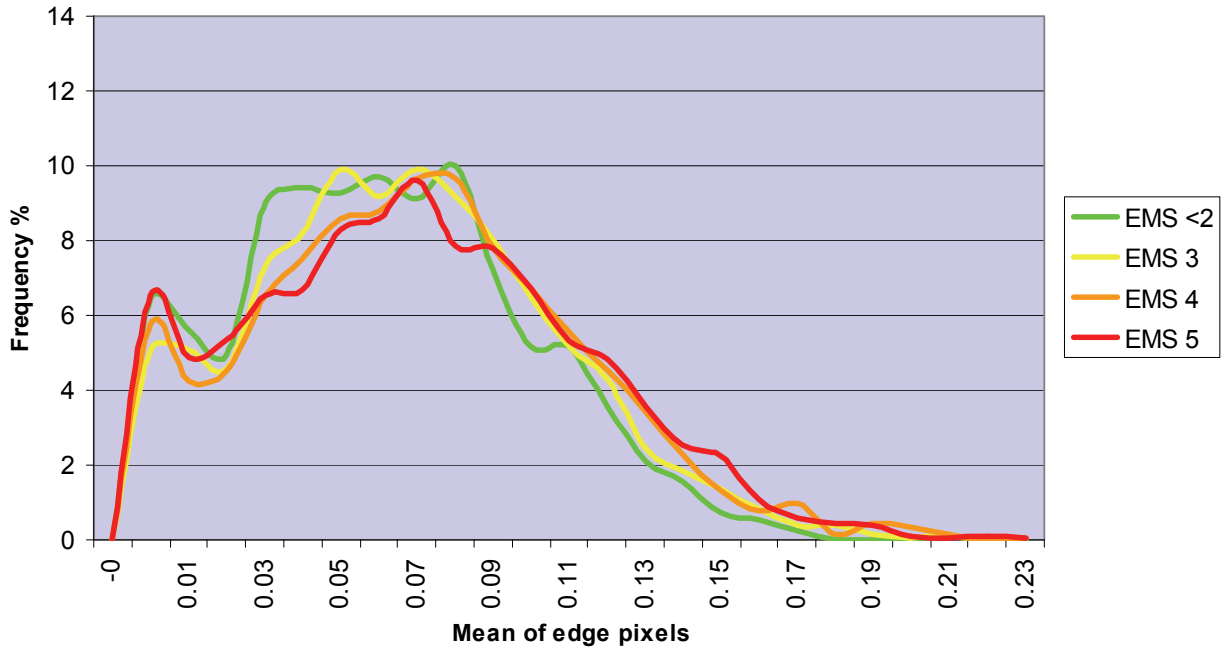

(b) 'After' image


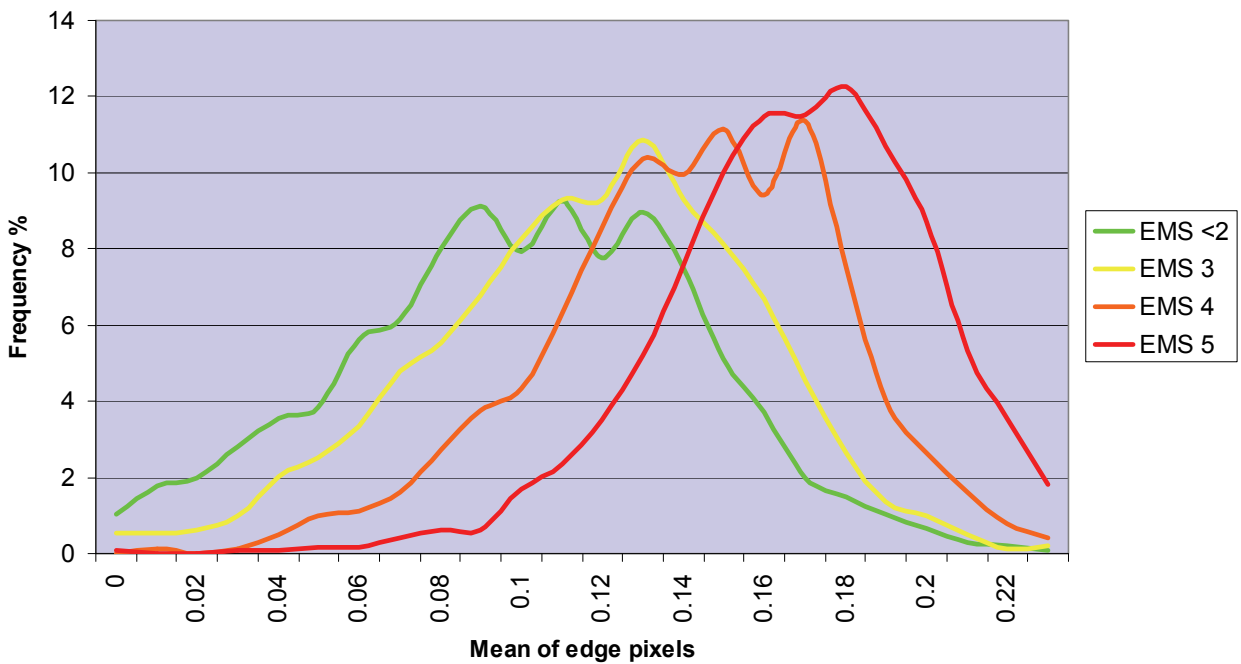



Figure 5-4 Frequency of Edge Pixels Occurring within (a) Before and (b) After Images for Buildings Classified According to the EMS98 Damage Scale (Validation Dataset Provided Courtesy of Yamazaki *et al.* (2004)).



(a) EMS98 damage level 5 (Destruction)

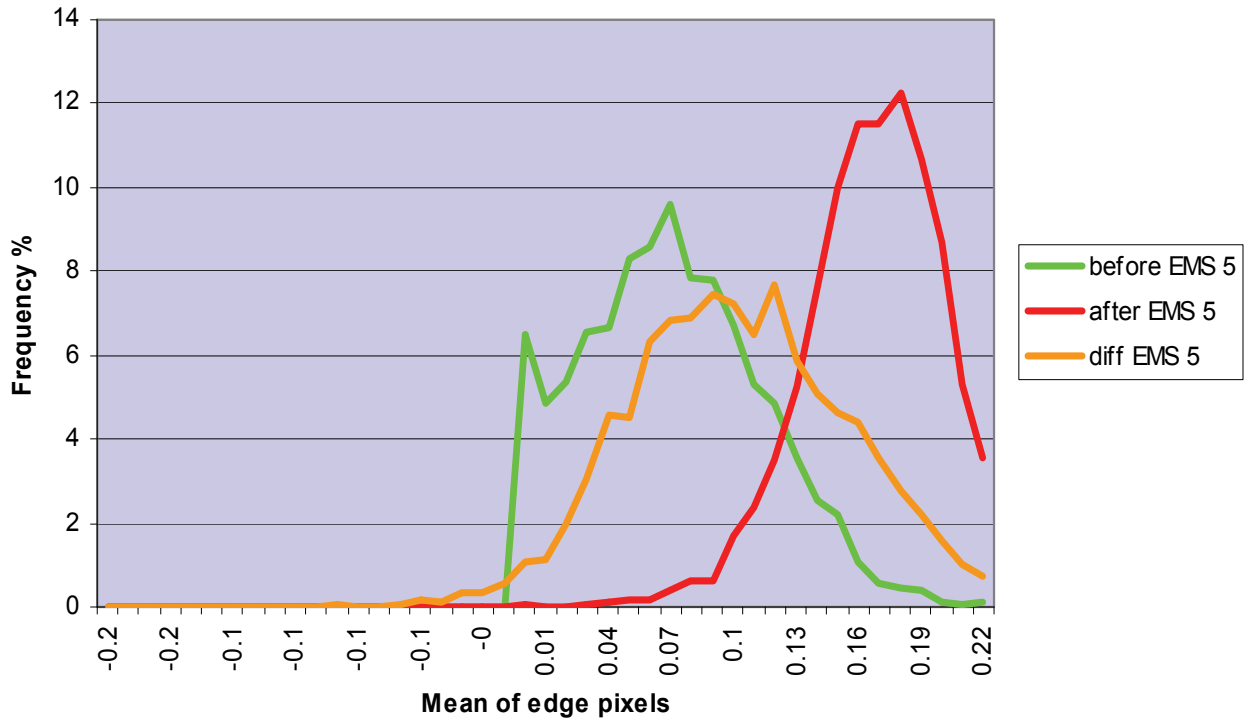

(b) EMS98 damage level 2 (Moderate Damage)

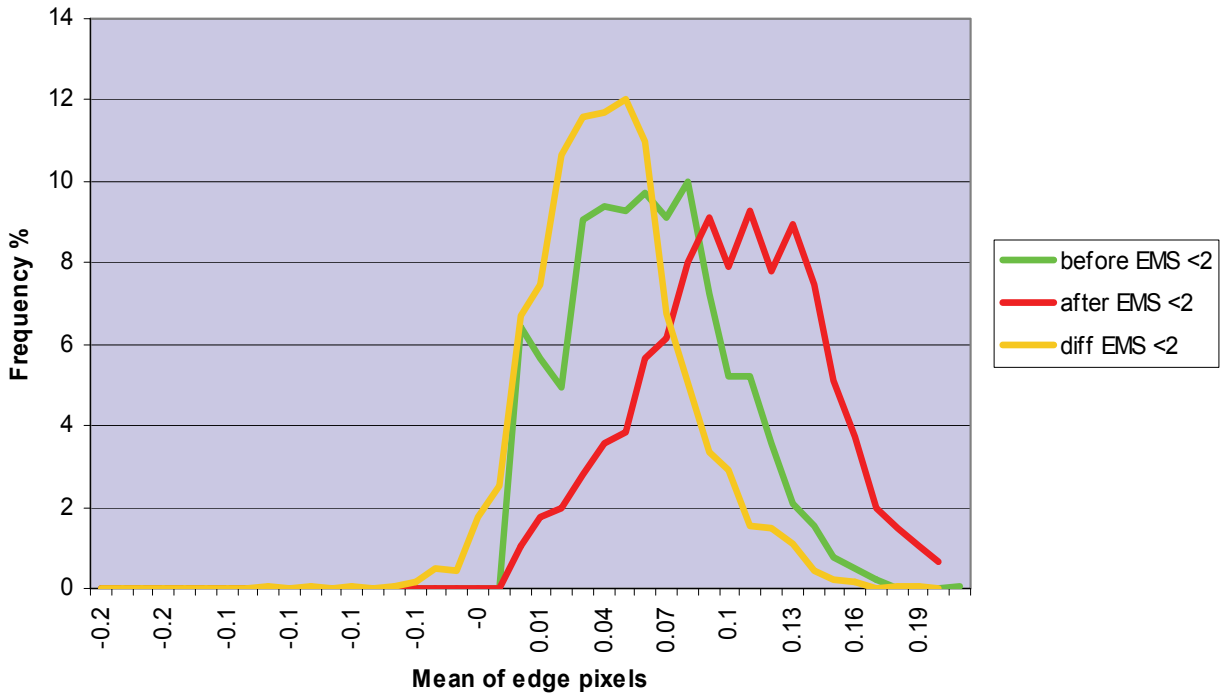

**Figure 5-5 Variation in the Frequency of Edge Pixels Occurring within Buildings Classified as EMS98 Level 5 (Destruction) and Level 2 (Moderate Damage) for Non-Damaged (Before) and Damaged (After) Scenarios. The Difference Between the Before and After Results is also Shown.**

#### 5.4 Counting the Number of Collapsed Buildings (Step 7)

Using the optimum threshold value of  $D = 0.04$  (see figure 5-3), a total of 7,390 (39.2%) buildings within Bam were classified as collapsed (table 5-1). On a city-wide scale, this total is 33% higher than the validation dataset developed by Yamazaki *et al.* (2004). As for the Method 1 results (Section 3), which overestimated the frequency of collapse by 17%, the higher frequency is likely linked to the building to object ratio output from the segmentation phase. Clearly, the accuracy of segmentation requires further refinement as input to the damage detection phase.

To explore performance in greater detail, a neighborhood level accuracy assessment was conducted which employed a total of 163 buildings. The results in table 5-2 found that using an edge-based change detection methodology, 68% of footprints were correctly classified.

**Table 5-1 Number of Collapsed Buildings, Computed Using the Edge-Based Damage Classification. Area of Building Collapse is Expressed in M<sup>2</sup>**

Classification	Count	Object average area	Total area
Not damaged	11,482 (60.8%)	189	2,647,847
Damaged	7,390 (39.2%)	231	2,082,690
Total	18,872	205	4,730,537

**Table 5-2 Confusion Matrix Relating to the Accuracy Assessment for the Edge-Based Damage Classification**

Reference/ classified	Damaged	Non- damaged	total	
Damaged	70	34	104	
Non-damaged	18	41	59	
Total	88	75	163	Accuracy = 68%

## SECTION 6 KEY FINDINGS AND FUTURE WORK

Two object-oriented methodologies are presented for quantifying the number of collapsed buildings in the aftermath of a major earthquake, using high-resolution optical satellite imagery captured before and soon after the event. This general theoretical approach has enormous potential to yield rapid urban damage estimates in the aftermath of future disasters.

The methodologies described here employ a two-phase process, comprising: (1) building inventory development; and (2) damage assessment. Building inventory development provides a count of the total number of structures (both damaged and non-damaged) based on analysis of the ‘before’ building stock. Damage assessment may employ a range of different theoretical techniques to identify the presence of collapsed structures. The techniques presented here explored both intra-scene variations between collapsed and non-collapsed buildings, and damage-based changes between the before and after images.

- Method 1 – Reclassification detected damaged buildings within the total building stock, based on characteristic spectral features within the ‘after’ image. In this instance, intact adobe buildings are characterized by homogenous and bright/white domed or flat rooftops. In contrast, the collapsed structures appear as chaotic piles of debris, of a subdued color that is similar to the surrounding soils.
- Method 2 – Edge-based damage thresholding detected damaged buildings based on differences between the occurrence of edge features within the before and after images. In this instance, intact adobe buildings are delineated around the margin, with limited texture on the domed roof. In contrast, irregular edges are prevalent within collapsed structures, associated with chaotic debris piles.

The results obtained here for Phase 1 of the methodology - building inventory development, suggest that eCognition object-oriented image processing software is a useful environment for extracting the footprints of non-damage structures, which provides a basis for classifying the damage state. However, the overestimation of building occurrence suggests that using a single set of parameters to extract all structures within a city introduces errors, particularly where there are differences in building structure size, orientation and density.

In order to optimize the delineation of building outlines by minimizing occurrences of building and object split, the exploration of techniques for intra-scene segmentation factor optimization is an important topic for future research. This evaluation should also investigate whether segmentation performance varies more widely with structural and occupancy type, urban setting, and geographic location, with the aim of establishing the robustness of this approach for different urban environments around the World, maximizing 1:1 correspondence between segmented objects and the full range of building stock within a given city, and ultimately streamlining the segmentation process.

The accuracy achieved when classifying segmented objects into classes of building versus non-building may be further improved through the investigation of more sophisticated processing options, including advanced nearest neighbor and fuzzy classification techniques.

The results obtained here for Phase 2 of the methodology – damage detection, suggest that both re-classification and edge-based damage thresholding are useful techniques for identifying building collapse. The number of collapsed buildings was overestimated by 17-33% compared with a validation dataset developed by Yamazaki et al. (2004). The reclassification performed better than the edge-based damage detection methodology. This overestimation is largely due to object split at the segmentation phase and reinforces the importance of further research to improve the accuracy of building inventory extraction prior to damage assessment.

## SECTION 7 REFERENCES

- Adams, B.J. and Huyck, C.K., (2006), The emerging role of remote sensing technology in emergency management, In Taylor, C. and VanMarcke, E. (eds) *ASCE Monograph: Infrastructure risk Management Processes: Natural, Accidental, and Deliberate Hazards*, ASCE. P. 95-117.
- Adams, B.J., Huyck, C.K., Eguchi, R.T., Yamazaki, F. and Estrada, M., (2003), Post-earthquake reconnaissance using satellite imagery: Boumerdes case study, In *EERI (ed.) The Boumerdes, Algeria, Earthquake May 21, 2003*, EERI: Oakland, Insert p. 1-8.
- Adams, B.J., Huyck, C.K., Mansouri, B., Eguchi, R.T. and Shinozuka, M., (2004), Application of high-resolution optical satellite imagery for post-earthquake damage assessment: The 2003 Boumerdes (Algeria) and Bam (Iran) earthquakes, *MCEER Research and Accomplishments 2003-2004*, MCEER: Buffalo.
- Baatz M. and Schape, A., (1999), Object-oriented and multi-scale image analysis in semantic networks, *Proceedings of the 2<sup>nd</sup> International Symposium on Operationalization of Remote Sensing*, Enschede, ITC.
- Baatz, M. and Schäpe, A., (2000), Multiresolution segmentation – an optimization approach for high quality multi-scale image segmentation, In Strobl J., Blaschke T., and Griesebner, G. (eds). *Angewandte Geographische Informationsverarbeitung XI, Vorträge zum AGIT-Syposium Salzburg*, Herbert Wichmann: Heidelberg, p.12-23.
- Baltsavias, E.P., (2004), Object extraction and revision by image analysis using existing geodata and knowledge: current status and steps towards operational systems, *ISPRS Journal of Photogrammetry and Remote Sensing*, **58**, 129-151.
- BBC, (2004) *Iran lowers Bam earthquake toll*, [http://news.bbc.co.uk/1/hi/world/middle\\_east/3579173.stm](http://news.bbc.co.uk/1/hi/world/middle_east/3579173.stm)
- Benz, U., Hofmann, P., Willhauck, G., Lingenfelder, I. and M. Heynen, (2004), Multi-resolution, object-oriented fuzzy analysis of remote sensing data for GIS-ready information, *ISPRS Journal of Photogrammetry & Remote Sensing*, **58**, 239-258.
- Bitelli G., Camassi R., Gusella L., Mognol A., (2004), Image change detection on urban areas: the earthquake case, *Proceedings of the ISPRS XXth Congress Volume XXXV*, Istanbul.
- Blaschke, T., (2004), Towards a framework for change detection based on image objects, *Proceedings of the 1st GGRS*, Göttingen, 7-8 October 2004.
- Bruneau, M., Chang, S., Eguchi, R., Lee, G., O'Rourke, T., Reinhorn, A., Shinozuka, M., Tierney, K., Wallace, W., von Winterfelt, D., (2003). "A Framework to Quantitatively Assess and Enhance the Seismic Resilience of Communities", *EERI Spectra Journal*, Vol.19, No.4, pp.733-752.

Canny, J. F., (1986) A computational approach to edge detection. *IEEE Trans. Pattern Analysis and Machine Intelligence*, **8 (6)**: 1986, 679-698.

Chen, Y., Fung, T., Lin, W. and Wang, J., (2005), An image fusion method based on object-oriented image classification, *Proceedings of the IGARSS Geoscience and Remote Sensing Symposium*, **6**: 3924 - 3927

Chiroiu, L., Adams, B.J. and Saito, K., (2006), Advanced techniques in modeling, response and recovery, *In* Olivera, C.S., Roca, A. and Goula, X. (eds.) *Assessing and Managing Earthquake Risk. Geoscientific and Engineering Knowledge for Earthquake Risk Mitigation: Developments, Tools, Techniques*, Springer: Netherlands, p. 427-448.

Congalton R G., (1982), A comparison of sampling schemes used in generating error matrices for assessing the accuracy of maps generated from remotely sensed data. *Photogrammetric Engineering & Remote Sensing*, **54**:593–600.

Czaplewski, L., (1992), Misclassification bias in areal estimates, *Photogrammetric Engineering & Remote Sensing*, **58**:189-192.

Definiens, (2006), Definiens Professional 5 Reference Book.

Definiens Imaging, (2004), *eCognition 4.0, User Guide*, Definiens Imaging GmbH, Munchen, Germany

Eguchi, R., Huyck, C., Adams, B., Mansouri, B., Houshmand, B., and Shinozuka, M., (2002), Earthquake damage detection algorithms using remote sensing data – Application to the August 17, 1999 Marmara, Turkey Earthquake, *Proceedings of the 7<sup>th</sup> U.S. National Conference on Earthquake Engineering*, Boston.

Frauman, E. and Wolff, E., (2005), Segmentation of very high spatial resolution satellite images in urban areas for segments-based classification, *Proceedings of the ISPRS WG VII/1 "Human Settlements and Impact Analysis" 3rd International Symposium Remote Sensing and Data Fusion Over Urban Areas (URBAN 2005) and 5th International Symposium Remote Sensing of Urban Areas (URS 2005)*. Tempe, AZ, USA.

Gamba, P., Dell'Acqua, F., Lisini, G., Trianni, G., and Tompkinson, W., (2005), Image interpretation through problem segmentation for very high resolution data, *IGARSS 2005, Proceedings of the International Geoscience and Remote Sensing Symposium*, Seoul, Korea.

Giada, S., De Groeve, T., Ehrlich, D. and Soille, P., (2003), Information extraction from very high resolution satellite imagery over Lukole refugee camp, Tanzania, *International Journal of Remote Sensing*, **24(22)**: 4251-4266.

Greidanus, H., Dekker, R., Caliz, J.J. and Rodrigues, A., (2005), Tsunami damage assessment with satellite radar. URSI 2005 Commission F Symposium on Microwave Remote Sensing of the Earth, Oceans, Ice, and Atmosphere, Ispra, Italy, 20-21 April 2005. (<http://ursi-f-2005.jrc.it/proceedings.htm>)

Gusella, L., (2006), *Use of Remote Sensing Technology for Disaster Mitigation*, Unpublished PhD Thesis, University of Bologna.

Gusella, L., Adams, B.J., Bitelli, G. and Huyck, C.K. (2005) Object-oriented image understanding and post-earthquake damage assessment for the 2003 Bam, Iran, earthquake, *Earthquake Spectra*, **21(S1)**: 225-238.

Hall, O. and Hay, G. J., (2003), A multiscale object-specific approach to digital change detection, *International Journal of Applied Earth Observation and Geoinformation*, **4(4)**: 311-327.

Herold, M., Scepan, J. Muller, A. and Gunther, S., (2002), Object-oriented mapping and analysis of urban land use/cover using IKONOS data, *Proceedings of the 22nd EARSeL Symposium & General Assembly "Geoinformation for European-wide integration"*, Prague.

Hofmann, P., (2001), Detecting urban features from IKONOS data using an object-oriented approach, *Proceedings of RSPS*, <http://www.definiens.com>

Hutchinson, T and Chen, Z., (2005), Optimized estimated ground truth for object-based urban damage estimation using satellite images for the 2003 Bam, Iran, earthquake, *Earthquake Spectra*, **21(S1)**: 239-254.

Huyck, C.K., Adams, B.J., Cho, S., Eguchi, R.T., Mansouri, B. and Houshmand, B. (2004) Methodologies for Post-earthquake Building Damage Detection Using SAR and Optical Remote Sensing: Application to the August 17, 1999 Marmara, Turkey Earthquake, *MCEER-04-0004 Technical Report*, MCEER: Buffalo.

Kouchi, K. and Yamazaki, F., (2005), Damage Detection Based on Object-based Segmentation and Classification from High-resolution Satellite Images for the 2003 Boumerdes, Algeria Earthquake, *Proceedings of 26th Asian Conference on Remote Sensing*.

Kressler, F.P., Steinnocher, K. and Franzen, M., (2005a), Object-oriented classification of orthophotos to support update of spatial databases, *Proceedings of the IGARSS 2005 Symposium*, Seoul, Korea. July 25-29.

Kressler, F.P., Steinnocher, K. and Kim, Y.S., (2005b), Enhanced semi-automatic image classification of high-resolution data, *Proceedings of the IGARSS 2005 Symposium*, Seoul, Korea. July 25-29.

Lemp, D and Weidner, U., (2005), Improvements of roof surface classification using hyperspectral and laser scanning data, *Proceedings of the ISPRS WG VII/1 3rd International Symposium Remote Sensing and Data Fusion Over Urban Areas (URBAN 2005) and 5th International Symposium Remote Sensing of Urban Areas (URS 2005)*.

Liu, Z.J., Wang, J. and Liu, W.P., (2005), Building extraction from high resolution imagery based on multi-scale object oriented classification and probabilistic Hough transform, *Proceedings of the IGARSS*, 4:2250- 2253

- Matsumoto, K., Vu, T.T., and Yamazaki, F., (2006,) Extraction of damaged buildings using high-resolution satellite images in the 2006 central Java earthquake, *Proceedings of the Conference of the Remote Sensing Society of Japan*.
- Matsuoka, M. and Yamazaki, F., (1998), Identification of damaged areas due to the 1995 Hyogoken-Nanbu earthquake using satellite optical images, *Proceedings of the 19<sup>th</sup> Asian Conference on Remote Sensing*, Manila.
- Meinel G. and Neubert M., (2004), A comparison of segmentation programs for high resolution remote sensing data, *Proceedings of the ISPRS XXth Congress Volume XXXV*, Istanbul.
- RSI (2002) *User's guide, ENVI version 3.6, 2nd edition*, RSI Inc., CO, US
- Schowengerdt, R., (1983), *Techniques for Image Processing and Classification in Remote Sensing*, Academic Press: New York.
- Serra, J., (1982), *Image Analysis and Mathematical Morphology*, London: Academic Press.
- Shackelford, A.K. and Davis, C.H., (2003), A combined fuzzy pixel-based and object-based approach for classification of high-resolution multispectral data over urban areas, *IEEE Transactions on Geoscience and Remote Sensing*, **41(10)**: pages.
- Sheikholeslami, G., Chatterjee, S. and Zhang, A., (2000), WaveCluster: a wavelet based clustering approach for spatial data in very large databases. *The International Journal on Very Large Databases*. **8**: 289-304.
- Stasolla, M., Gamba, P., Dell'Acqua, F. and Rathje, E., (2006), Matching spectral with spatial analysis to improve building damage recognition in VHR images, *Proceedings of the 4th International Workshop on Remote Sensing for Disaster Response*, Cambridge, UK.
- United Nations, (2004), *Flash appeal - Bam earthquake of 26 December 2003, Islamic Republic of Iran, relief, recovery and immediate rehabilitation*,
- Vu, T., Matsuoka, M. and Yamazaki, F., (2005a), Preliminary results in development of an object-based image analysis method for earthquake damage assessment, *Proceedings of the 3<sup>rd</sup> International Workshop on Remote Sensing for Disaster Response*, Chiba, Japan. [http://mceer.buffalo.edu/publications/workshop/05-SP03/Third\\_Workshop/default.asp](http://mceer.buffalo.edu/publications/workshop/05-SP03/Third_Workshop/default.asp)
- Vu, T., Matsuoka, M. and Yamazaki, F., (2005b), Towards an object-based detection of earthquake damaged buildings, *Proceedings of the ISPRS workshop DIMAI'2005*, Bangkok, Thailand
- Vu, T., Matsuoka, M. and Yamazaki, F., (2006), Multi-level detection of damaged buildings from high-resolution optical satellite images, *Proceedings of the SPIE International Symposium on Asia-Pacific Remote Sensing Symposium*, Goa, India, CD-ROM, AE109.
- Walter, V., (2004), Object-based classification of remote sensing data for change detection, *ISPRS Journal of Photogrammetry and Remote Sensing*, **58**, 225-238.



Wei, W., Chen, X., and Ma, A., (2005), Object-oriented information extraction and application in high-resolution remote sensing image, *Proceedings of the IGARSS Geoscience and Remote Sensing Symposium*, **6**: 3803 - 3806.

Yamazaki, F., Yano, Y., Matsuoka, M. and Vu, T.T., (2004), Building damage interpretation of the 2003 Bam, Iran earthquake, using Quickbird images, *Proceedings of the 2<sup>nd</sup> International Workshop on Remote Sensing for Disaster Response*, Newport Beach, USA.

Zhong, C., Zhongmin, Z., Dongmei, Y., and Renxi, C., (2005), Multi-scale segmentation of the high resolution remote sensing image, *Proceedings of the IGARSS 2005 Symposium*, Seoul, Korea. July 25-29, 2005.



## MCEER Technical Reports

MCEER publishes technical reports on a variety of subjects written by authors funded through MCEER. These reports are available from both MCEER Publications and the National Technical Information Service (NTIS). Requests for reports should be directed to MCEER Publications, MCEER, University at Buffalo, State University of New York, Red Jacket Quadrangle, Buffalo, New York 14261. Reports can also be requested through NTIS, 5285 Port Royal Road, Springfield, Virginia 22161. NTIS accession numbers are shown in parenthesis, if available.

- NCEER-87-0001 "First-Year Program in Research, Education and Technology Transfer," 3/5/87, (PB88-134275, A04, MF-A01).
- NCEER-87-0002 "Experimental Evaluation of Instantaneous Optimal Algorithms for Structural Control," by R.C. Lin, T.T. Soong and A.M. Reinhorn, 4/20/87, (PB88-134341, A04, MF-A01).
- NCEER-87-0003 "Experimentation Using the Earthquake Simulation Facilities at University at Buffalo," by A.M. Reinhorn and R.L. Ketter, to be published.
- NCEER-87-0004 "The System Characteristics and Performance of a Shaking Table," by J.S. Hwang, K.C. Chang and G.C. Lee, 6/1/87, (PB88-134259, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0005 "A Finite Element Formulation for Nonlinear Viscoplastic Material Using a Q Model," by O. Gyebe and G. Dasgupta, 11/2/87, (PB88-213764, A08, MF-A01).
- NCEER-87-0006 "Symbolic Manipulation Program (SMP) - Algebraic Codes for Two and Three Dimensional Finite Element Formulations," by X. Lee and G. Dasgupta, 11/9/87, (PB88-218522, A05, MF-A01).
- NCEER-87-0007 "Instantaneous Optimal Control Laws for Tall Buildings Under Seismic Excitations," by J.N. Yang, A. Akbarpour and P. Ghaemmaghami, 6/10/87, (PB88-134333, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0008 "IDARC: Inelastic Damage Analysis of Reinforced Concrete Frame - Shear-Wall Structures," by Y.J. Park, A.M. Reinhorn and S.K. Kunnath, 7/20/87, (PB88-134325, A09, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0009 "Liquefaction Potential for New York State: A Preliminary Report on Sites in Manhattan and Buffalo," by M. Budhu, V. Vijayakumar, R.F. Giese and L. Baumgras, 8/31/87, (PB88-163704, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0010 "Vertical and Torsional Vibration of Foundations in Inhomogeneous Media," by A.S. Veletsos and K.W. Dotson, 6/1/87, (PB88-134291, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0011 "Seismic Probabilistic Risk Assessment and Seismic Margins Studies for Nuclear Power Plants," by Howard H.M. Hwang, 6/15/87, (PB88-134267, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0012 "Parametric Studies of Frequency Response of Secondary Systems Under Ground-Acceleration Excitations," by Y. Yong and Y.K. Lin, 6/10/87, (PB88-134309, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0013 "Frequency Response of Secondary Systems Under Seismic Excitation," by J.A. HoLung, J. Cai and Y.K. Lin, 7/31/87, (PB88-134317, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0014 "Modelling Earthquake Ground Motions in Seismically Active Regions Using Parametric Time Series Methods," by G.W. Ellis and A.S. Cakmak, 8/25/87, (PB88-134283, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0015 "Detection and Assessment of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 8/25/87, (PB88-163712, A05, MF-A01). This report is only available through NTIS (see address given above).

- NCEER-87-0016 "Pipeline Experiment at Parkfield, California," by J. Isenberg and E. Richardson, 9/15/87, (PB88-163720, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0017 "Digital Simulation of Seismic Ground Motion," by M. Shinozuka, G. Deodatis and T. Harada, 8/31/87, (PB88-155197, A04, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0018 "Practical Considerations for Structural Control: System Uncertainty, System Time Delay and Truncation of Small Control Forces," J.N. Yang and A. Akbarpour, 8/10/87, (PB88-163738, A08, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0019 "Modal Analysis of Nonclassically Damped Structural Systems Using Canonical Transformation," by J.N. Yang, S. Sarkani and F.X. Long, 9/27/87, (PB88-187851, A04, MF-A01).
- NCEER-87-0020 "A Nonstationary Solution in Random Vibration Theory," by J.R. Red-Horse and P.D. Spanos, 11/3/87, (PB88-163746, A03, MF-A01).
- NCEER-87-0021 "Horizontal Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by A.S. Veletsos and K.W. Dotson, 10/15/87, (PB88-150859, A04, MF-A01).
- NCEER-87-0022 "Seismic Damage Assessment of Reinforced Concrete Members," by Y.S. Chung, C. Meyer and M. Shinozuka, 10/9/87, (PB88-150867, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0023 "Active Structural Control in Civil Engineering," by T.T. Soong, 11/11/87, (PB88-187778, A03, MF-A01).
- NCEER-87-0024 "Vertical and Torsional Impedances for Radially Inhomogeneous Viscoelastic Soil Layers," by K.W. Dotson and A.S. Veletsos, 12/87, (PB88-187786, A03, MF-A01).
- NCEER-87-0025 "Proceedings from the Symposium on Seismic Hazards, Ground Motions, Soil-Liquefaction and Engineering Practice in Eastern North America," October 20-22, 1987, edited by K.H. Jacob, 12/87, (PB88-188115, A23, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0026 "Report on the Whittier-Narrows, California, Earthquake of October 1, 1987," by J. Pantelic and A. Reinhorn, 11/87, (PB88-187752, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-87-0027 "Design of a Modular Program for Transient Nonlinear Analysis of Large 3-D Building Structures," by S. Srivastav and J.F. Abel, 12/30/87, (PB88-187950, A05, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-87-0028 "Second-Year Program in Research, Education and Technology Transfer," 3/8/88, (PB88-219480, A04, MF-A01).
- NCEER-88-0001 "Workshop on Seismic Computer Analysis and Design of Buildings With Interactive Graphics," by W. McGuire, J.F. Abel and C.H. Conley, 1/18/88, (PB88-187760, A03, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0002 "Optimal Control of Nonlinear Flexible Structures," by J.N. Yang, F.X. Long and D. Wong, 1/22/88, (PB88-213772, A06, MF-A01).
- NCEER-88-0003 "Substructuring Techniques in the Time Domain for Primary-Secondary Structural Systems," by G.D. Manolis and G. Juhn, 2/10/88, (PB88-213780, A04, MF-A01).
- NCEER-88-0004 "Iterative Seismic Analysis of Primary-Secondary Systems," by A. Singhal, L.D. Lutes and P.D. Spanos, 2/23/88, (PB88-213798, A04, MF-A01).
- NCEER-88-0005 "Stochastic Finite Element Expansion for Random Media," by P.D. Spanos and R. Ghanem, 3/14/88, (PB88-213806, A03, MF-A01).

- NCEER-88-0006 "Combining Structural Optimization and Structural Control," by F.Y. Cheng and C.P. Pantelides, 1/10/88, (PB88-213814, A05, MF-A01).
- NCEER-88-0007 "Seismic Performance Assessment of Code-Designed Structures," by H.H-M. Hwang, J-W. Jaw and H-J. Shau, 3/20/88, (PB88-219423, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0008 "Reliability Analysis of Code-Designed Structures Under Natural Hazards," by H.H-M. Hwang, H. Ushiba and M. Shinozuka, 2/29/88, (PB88-229471, A07, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0009 "Seismic Fragility Analysis of Shear Wall Structures," by J-W Jaw and H.H-M. Hwang, 4/30/88, (PB89-102867, A04, MF-A01).
- NCEER-88-0010 "Base Isolation of a Multi-Story Building Under a Harmonic Ground Motion - A Comparison of Performances of Various Systems," by F-G Fan, G. Ahmadi and I.G. Tadjbakhsh, 5/18/88, (PB89-122238, A06, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0011 "Seismic Floor Response Spectra for a Combined System by Green's Functions," by F.M. Lavelle, L.A. Bergman and P.D. Spanos, 5/1/88, (PB89-102875, A03, MF-A01).
- NCEER-88-0012 "A New Solution Technique for Randomly Excited Hysteretic Structures," by G.Q. Cai and Y.K. Lin, 5/16/88, (PB89-102883, A03, MF-A01).
- NCEER-88-0013 "A Study of Radiation Damping and Soil-Structure Interaction Effects in the Centrifuge," by K. Weissman, supervised by J.H. Prevost, 5/24/88, (PB89-144703, A06, MF-A01).
- NCEER-88-0014 "Parameter Identification and Implementation of a Kinematic Plasticity Model for Frictional Soils," by J.H. Prevost and D.V. Griffiths, to be published.
- NCEER-88-0015 "Two- and Three- Dimensional Dynamic Finite Element Analyses of the Long Valley Dam," by D.V. Griffiths and J.H. Prevost, 6/17/88, (PB89-144711, A04, MF-A01).
- NCEER-88-0016 "Damage Assessment of Reinforced Concrete Structures in Eastern United States," by A.M. Reinhorn, M.J. Seidel, S.K. Kunnath and Y.J. Park, 6/15/88, (PB89-122220, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0017 "Dynamic Compliance of Vertically Loaded Strip Foundations in Multilayered Viscoelastic Soils," by S. Ahmad and A.S.M. Israil, 6/17/88, (PB89-102891, A04, MF-A01).
- NCEER-88-0018 "An Experimental Study of Seismic Structural Response With Added Viscoelastic Dampers," by R.C. Lin, Z. Liang, T.T. Soong and R.H. Zhang, 6/30/88, (PB89-122212, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0019 "Experimental Investigation of Primary - Secondary System Interaction," by G.D. Manolis, G. Juhn and A.M. Reinhorn, 5/27/88, (PB89-122204, A04, MF-A01).
- NCEER-88-0020 "A Response Spectrum Approach For Analysis of Nonclassically Damped Structures," by J.N. Yang, S. Sarkani and F.X. Long, 4/22/88, (PB89-102909, A04, MF-A01).
- NCEER-88-0021 "Seismic Interaction of Structures and Soils: Stochastic Approach," by A.S. Veletsos and A.M. Prasad, 7/21/88, (PB89-122196, A04, MF-A01). This report is only available through NTIS (see address given above).
- NCEER-88-0022 "Identification of the Serviceability Limit State and Detection of Seismic Structural Damage," by E. DiPasquale and A.S. Cakmak, 6/15/88, (PB89-122188, A05, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0023 "Multi-Hazard Risk Analysis: Case of a Simple Offshore Structure," by B.K. Bhartia and E.H. Vanmarcke, 7/21/88, (PB89-145213, A05, MF-A01).

- NCEER-88-0024 "Automated Seismic Design of Reinforced Concrete Buildings," by Y.S. Chung, C. Meyer and M. Shinozuka, 7/5/88, (PB89-122170, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0025 "Experimental Study of Active Control of MDOF Structures Under Seismic Excitations," by L.L. Chung, R.C. Lin, T.T. Soong and A.M. Reinhorn, 7/10/88, (PB89-122600, A04, MF-A01).
- NCEER-88-0026 "Earthquake Simulation Tests of a Low-Rise Metal Structure," by J.S. Hwang, K.C. Chang, G.C. Lee and R.L. Ketter, 8/1/88, (PB89-102917, A04, MF-A01).
- NCEER-88-0027 "Systems Study of Urban Response and Reconstruction Due to Catastrophic Earthquakes," by F. Kozin and H.K. Zhou, 9/22/88, (PB90-162348, A04, MF-A01).
- NCEER-88-0028 "Seismic Fragility Analysis of Plane Frame Structures," by H.H-M. Hwang and Y.K. Low, 7/31/88, (PB89-131445, A06, MF-A01).
- NCEER-88-0029 "Response Analysis of Stochastic Structures," by A. Kardara, C. Bucher and M. Shinozuka, 9/22/88, (PB89-174429, A04, MF-A01).
- NCEER-88-0030 "Nonnormal Accelerations Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 9/19/88, (PB89-131437, A04, MF-A01).
- NCEER-88-0031 "Design Approaches for Soil-Structure Interaction," by A.S. Veletsos, A.M. Prasad and Y. Tang, 12/30/88, (PB89-174437, A03, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0032 "A Re-evaluation of Design Spectra for Seismic Damage Control," by C.J. Turkstra and A.G. Tallin, 11/7/88, (PB89-145221, A05, MF-A01).
- NCEER-88-0033 "The Behavior and Design of Noncontact Lap Splices Subjected to Repeated Inelastic Tensile Loading," by V.E. Sagan, P. Gergely and R.N. White, 12/8/88, (PB89-163737, A08, MF-A01).
- NCEER-88-0034 "Seismic Response of Pile Foundations," by S.M. Mamoon, P.K. Banerjee and S. Ahmad, 11/1/88, (PB89-145239, A04, MF-A01).
- NCEER-88-0035 "Modeling of R/C Building Structures With Flexible Floor Diaphragms (IDARC2)," by A.M. Reinhorn, S.K. Kunnath and N. Panahshahi, 9/7/88, (PB89-207153, A07, MF-A01).
- NCEER-88-0036 "Solution of the Dam-Reservoir Interaction Problem Using a Combination of FEM, BEM with Particular Integrals, Modal Analysis, and Substructuring," by C-S. Tsai, G.C. Lee and R.L. Ketter, 12/31/88, (PB89-207146, A04, MF-A01).
- NCEER-88-0037 "Optimal Placement of Actuators for Structural Control," by F.Y. Cheng and C.P. Pantelides, 8/15/88, (PB89-162846, A05, MF-A01).
- NCEER-88-0038 "Teflon Bearings in Aseismic Base Isolation: Experimental Studies and Mathematical Modeling," by A. Mokha, M.C. Constantinou and A.M. Reinhorn, 12/5/88, (PB89-218457, A10, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-88-0039 "Seismic Behavior of Flat Slab High-Rise Buildings in the New York City Area," by P. Weidlinger and M. Ettouney, 10/15/88, (PB90-145681, A04, MF-A01).
- NCEER-88-0040 "Evaluation of the Earthquake Resistance of Existing Buildings in New York City," by P. Weidlinger and M. Ettouney, 10/15/88, to be published.
- NCEER-88-0041 "Small-Scale Modeling Techniques for Reinforced Concrete Structures Subjected to Seismic Loads," by W. Kim, A. El-Attar and R.N. White, 11/22/88, (PB89-189625, A05, MF-A01).
- NCEER-88-0042 "Modeling Strong Ground Motion from Multiple Event Earthquakes," by G.W. Ellis and A.S. Cakmak, 10/15/88, (PB89-174445, A03, MF-A01).

- NCEER-88-0043 "Nonstationary Models of Seismic Ground Acceleration," by M. Grigoriu, S.E. Ruiz and E. Rosenblueth, 7/15/88, (PB89-189617, A04, MF-A01).
- NCEER-88-0044 "SARCF User's Guide: Seismic Analysis of Reinforced Concrete Frames," by Y.S. Chung, C. Meyer and M. Shinozuka, 11/9/88, (PB89-174452, A08, MF-A01).
- NCEER-88-0045 "First Expert Panel Meeting on Disaster Research and Planning," edited by J. Pantelic and J. Stoyke, 9/15/88, (PB89-174460, A05, MF-A01).
- NCEER-88-0046 "Preliminary Studies of the Effect of Degrading Infill Walls on the Nonlinear Seismic Response of Steel Frames," by C.Z. Chrysostomou, P. Gergely and J.F. Abel, 12/19/88, (PB89-208383, A05, MF-A01).
- NCEER-88-0047 "Reinforced Concrete Frame Component Testing Facility - Design, Construction, Instrumentation and Operation," by S.P. Pessiki, C. Conley, T. Bond, P. Gergely and R.N. White, 12/16/88, (PB89-174478, A04, MF-A01).
- NCEER-89-0001 "Effects of Protective Cushion and Soil Compliancy on the Response of Equipment Within a Seismically Excited Building," by J.A. HoLung, 2/16/89, (PB89-207179, A04, MF-A01).
- NCEER-89-0002 "Statistical Evaluation of Response Modification Factors for Reinforced Concrete Structures," by H.H-M. Hwang and J-W. Jaw, 2/17/89, (PB89-207187, A05, MF-A01).
- NCEER-89-0003 "Hysteretic Columns Under Random Excitation," by G-Q. Cai and Y.K. Lin, 1/9/89, (PB89-196513, A03, MF-A01).
- NCEER-89-0004 "Experimental Study of 'Elephant Foot Bulge' Instability of Thin-Walled Metal Tanks," by Z-H. Jia and R.L. Ketter, 2/22/89, (PB89-207195, A03, MF-A01).
- NCEER-89-0005 "Experiment on Performance of Buried Pipelines Across San Andreas Fault," by J. Isenberg, E. Richardson and T.D. O'Rourke, 3/10/89, (PB89-218440, A04, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0006 "A Knowledge-Based Approach to Structural Design of Earthquake-Resistant Buildings," by M. Subramani, P. Gergely, C.H. Conley, J.F. Abel and A.H. Zaghaw, 1/15/89, (PB89-218465, A06, MF-A01).
- NCEER-89-0007 "Liquefaction Hazards and Their Effects on Buried Pipelines," by T.D. O'Rourke and P.A. Lane, 2/1/89, (PB89-218481, A09, MF-A01).
- NCEER-89-0008 "Fundamentals of System Identification in Structural Dynamics," by H. Imai, C-B. Yun, O. Maruyama and M. Shinozuka, 1/26/89, (PB89-207211, A04, MF-A01).
- NCEER-89-0009 "Effects of the 1985 Michoacan Earthquake on Water Systems and Other Buried Lifelines in Mexico," by A.G. Ayala and M.J. O'Rourke, 3/8/89, (PB89-207229, A06, MF-A01).
- NCEER-89-R010 "NCEER Bibliography of Earthquake Education Materials," by K.E.K. Ross, Second Revision, 9/1/89, (PB90-125352, A05, MF-A01). This report is replaced by NCEER-92-0018.
- NCEER-89-0011 "Inelastic Three-Dimensional Response Analysis of Reinforced Concrete Building Structures (IDARC-3D), Part I - Modeling," by S.K. Kunnath and A.M. Reinhorn, 4/17/89, (PB90-114612, A07, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0012 "Recommended Modifications to ATC-14," by C.D. Poland and J.O. Malley, 4/12/89, (PB90-108648, A15, MF-A01).
- NCEER-89-0013 "Repair and Strengthening of Beam-to-Column Connections Subjected to Earthquake Loading," by M. Corazao and A.J. Durrani, 2/28/89, (PB90-109885, A06, MF-A01).
- NCEER-89-0014 "Program EXKAL2 for Identification of Structural Dynamic Systems," by O. Maruyama, C-B. Yun, M. Hoshiya and M. Shinozuka, 5/19/89, (PB90-109877, A09, MF-A01).



- NCEER-89-0015 "Response of Frames With Bolted Semi-Rigid Connections, Part I - Experimental Study and Analytical Predictions," by P.J. DiCorso, A.M. Reinhorn, J.R. Dickerson, J.B. Radzinski and W.L. Harper, 6/1/89, to be published.
- NCEER-89-0016 "ARMA Monte Carlo Simulation in Probabilistic Structural Analysis," by P.D. Spanos and M.P. Mignolet, 7/10/89, (PB90-109893, A03, MF-A01).
- NCEER-89-P017 "Preliminary Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 6/23/89, (PB90-108606, A03, MF-A01).
- NCEER-89-0017 "Proceedings from the Conference on Disaster Preparedness - The Place of Earthquake Education in Our Schools," Edited by K.E.K. Ross, 12/31/89, (PB90-207895, A012, MF-A02). This report is available only through NTIS (see address given above).
- NCEER-89-0018 "Multidimensional Models of Hysteretic Material Behavior for Vibration Analysis of Shape Memory Energy Absorbing Devices, by E.J. Graesser and F.A. Cozzarelli, 6/7/89, (PB90-164146, A04, MF-A01).
- NCEER-89-0019 "Nonlinear Dynamic Analysis of Three-Dimensional Base Isolated Structures (3D-BASIS)," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 8/3/89, (PB90-161936, A06, MF-A01). This report has been replaced by NCEER-93-0011.
- NCEER-89-0020 "Structural Control Considering Time-Rate of Control Forces and Control Rate Constraints," by F.Y. Cheng and C.P. Pantelides, 8/3/89, (PB90-120445, A04, MF-A01).
- NCEER-89-0021 "Subsurface Conditions of Memphis and Shelby County," by K.W. Ng, T-S. Chang and H-H.M. Hwang, 7/26/89, (PB90-120437, A03, MF-A01).
- NCEER-89-0022 "Seismic Wave Propagation Effects on Straight Jointed Buried Pipelines," by K. Elhadi and M.J. O'Rourke, 8/24/89, (PB90-162322, A10, MF-A02).
- NCEER-89-0023 "Workshop on Serviceability Analysis of Water Delivery Systems," edited by M. Grigoriu, 3/6/89, (PB90-127424, A03, MF-A01).
- NCEER-89-0024 "Shaking Table Study of a 1/5 Scale Steel Frame Composed of Tapered Members," by K.C. Chang, J.S. Hwang and G.C. Lee, 9/18/89, (PB90-160169, A04, MF-A01).
- NCEER-89-0025 "DYNA1D: A Computer Program for Nonlinear Seismic Site Response Analysis - Technical Documentation," by Jean H. Prevost, 9/14/89, (PB90-161944, A07, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-89-0026 "1:4 Scale Model Studies of Active Tendon Systems and Active Mass Dampers for Aseismic Protection," by A.M. Reinhorn, T.T. Soong, R.C. Lin, Y.P. Yang, Y. Fukao, H. Abe and M. Nakai, 9/15/89, (PB90-173246, A10, MF-A02). This report is available only through NTIS (see address given above).
- NCEER-89-0027 "Scattering of Waves by Inclusions in a Nonhomogeneous Elastic Half Space Solved by Boundary Element Methods," by P.K. Hadley, A. Askar and A.S. Cakmak, 6/15/89, (PB90-145699, A07, MF-A01).
- NCEER-89-0028 "Statistical Evaluation of Deflection Amplification Factors for Reinforced Concrete Structures," by H.H.M. Hwang, J-W. Jaw and A.L. Ch'ng, 8/31/89, (PB90-164633, A05, MF-A01).
- NCEER-89-0029 "Bedrock Accelerations in Memphis Area Due to Large New Madrid Earthquakes," by H.H.M. Hwang, C.H.S. Chen and G. Yu, 11/7/89, (PB90-162330, A04, MF-A01).
- NCEER-89-0030 "Seismic Behavior and Response Sensitivity of Secondary Structural Systems," by Y.Q. Chen and T.T. Soong, 10/23/89, (PB90-164658, A08, MF-A01).
- NCEER-89-0031 "Random Vibration and Reliability Analysis of Primary-Secondary Structural Systems," by Y. Ibrahim, M. Grigoriu and T.T. Soong, 11/10/89, (PB90-161951, A04, MF-A01).

- NCEER-89-0032 "Proceedings from the Second U.S. - Japan Workshop on Liquefaction, Large Ground Deformation and Their Effects on Lifelines, September 26-29, 1989," Edited by T.D. O'Rourke and M. Hamada, 12/1/89, (PB90-209388, A22, MF-A03).
- NCEER-89-0033 "Deterministic Model for Seismic Damage Evaluation of Reinforced Concrete Structures," by J.M. Bracci, A.M. Reinhorn, J.B. Mander and S.K. Kunnath, 9/27/89, (PB91-108803, A06, MF-A01).
- NCEER-89-0034 "On the Relation Between Local and Global Damage Indices," by E. DiPasquale and A.S. Cakmak, 8/15/89, (PB90-173865, A05, MF-A01).
- NCEER-89-0035 "Cyclic Undrained Behavior of Nonplastic and Low Plasticity Silts," by A.J. Walker and H.E. Stewart, 7/26/89, (PB90-183518, A10, MF-A01).
- NCEER-89-0036 "Liquefaction Potential of Surficial Deposits in the City of Buffalo, New York," by M. Budhu, R. Giese and L. Baumgrass, 1/17/89, (PB90-208455, A04, MF-A01).
- NCEER-89-0037 "A Deterministic Assessment of Effects of Ground Motion Incoherence," by A.S. Veletsos and Y. Tang, 7/15/89, (PB90-164294, A03, MF-A01).
- NCEER-89-0038 "Workshop on Ground Motion Parameters for Seismic Hazard Mapping," July 17-18, 1989, edited by R.V. Whitman, 12/1/89, (PB90-173923, A04, MF-A01).
- NCEER-89-0039 "Seismic Effects on Elevated Transit Lines of the New York City Transit Authority," by C.J. Costantino, C.A. Miller and E. Heymsfield, 12/26/89, (PB90-207887, A06, MF-A01).
- NCEER-89-0040 "Centrifugal Modeling of Dynamic Soil-Structure Interaction," by K. Weissman, Supervised by J.H. Prevost, 5/10/89, (PB90-207879, A07, MF-A01).
- NCEER-89-0041 "Linearized Identification of Buildings With Cores for Seismic Vulnerability Assessment," by I-K. Ho and A.E. Aktan, 11/1/89, (PB90-251943, A07, MF-A01).
- NCEER-90-0001 "Geotechnical and Lifeline Aspects of the October 17, 1989 Loma Prieta Earthquake in San Francisco," by T.D. O'Rourke, H.E. Stewart, F.T. Blackburn and T.S. Dickerman, 1/90, (PB90-208596, A05, MF-A01).
- NCEER-90-0002 "Nonnormal Secondary Response Due to Yielding in a Primary Structure," by D.C.K. Chen and L.D. Lutes, 2/28/90, (PB90-251976, A07, MF-A01).
- NCEER-90-0003 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/16/90, (PB91-251984, A05, MF-A05). This report has been replaced by NCEER-92-0018.
- NCEER-90-0004 "Catalog of Strong Motion Stations in Eastern North America," by R.W. Busby, 4/3/90, (PB90-251984, A05, MF-A01).
- NCEER-90-0005 "NCEER Strong-Motion Data Base: A User Manual for the GeoBase Release (Version 1.0 for the Sun3)," by P. Friberg and K. Jacob, 3/31/90 (PB90-258062, A04, MF-A01).
- NCEER-90-0006 "Seismic Hazard Along a Crude Oil Pipeline in the Event of an 1811-1812 Type New Madrid Earthquake," by H.H.M. Hwang and C-H.S. Chen, 4/16/90, (PB90-258054, A04, MF-A01).
- NCEER-90-0007 "Site-Specific Response Spectra for Memphis Sheahan Pumping Station," by H.H.M. Hwang and C.S. Lee, 5/15/90, (PB91-108811, A05, MF-A01).
- NCEER-90-0008 "Pilot Study on Seismic Vulnerability of Crude Oil Transmission Systems," by T. Ariman, R. Dobry, M. Grigoriu, F. Kozin, M. O'Rourke, T. O'Rourke and M. Shinozuka, 5/25/90, (PB91-108837, A06, MF-A01).
- NCEER-90-0009 "A Program to Generate Site Dependent Time Histories: EQGEN," by G.W. Ellis, M. Srinivasan and A.S. Cakmak, 1/30/90, (PB91-108829, A04, MF-A01).
- NCEER-90-0010 "Active Isolation for Seismic Protection of Operating Rooms," by M.E. Talbott, Supervised by M. Shinozuka, 6/8/9, (PB91-110205, A05, MF-A01).

- NCEER-90-0011 "Program LINEARID for Identification of Linear Structural Dynamic Systems," by C-B. Yun and M. Shinozuka, 6/25/90, (PB91-110312, A08, MF-A01).
- NCEER-90-0012 "Two-Dimensional Two-Phase Elasto-Plastic Seismic Response of Earth Dams," by A.N. Yiagos, Supervised by J.H. Prevost, 6/20/90, (PB91-110197, A13, MF-A02).
- NCEER-90-0013 "Secondary Systems in Base-Isolated Structures: Experimental Investigation, Stochastic Response and Stochastic Sensitivity," by G.D. Manolis, G. Juhn, M.C. Constantinou and A.M. Reinhorn, 7/1/90, (PB91-110320, A08, MF-A01).
- NCEER-90-0014 "Seismic Behavior of Lightly-Reinforced Concrete Column and Beam-Column Joint Details," by S.P. Pessiki, C.H. Conley, P. Gergely and R.N. White, 8/22/90, (PB91-108795, A11, MF-A02).
- NCEER-90-0015 "Two Hybrid Control Systems for Building Structures Under Strong Earthquakes," by J.N. Yang and A. Daniellians, 6/29/90, (PB91-125393, A04, MF-A01).
- NCEER-90-0016 "Instantaneous Optimal Control with Acceleration and Velocity Feedback," by J.N. Yang and Z. Li, 6/29/90, (PB91-125401, A03, MF-A01).
- NCEER-90-0017 "Reconnaissance Report on the Northern Iran Earthquake of June 21, 1990," by M. Mehrain, 10/4/90, (PB91-125377, A03, MF-A01).
- NCEER-90-0018 "Evaluation of Liquefaction Potential in Memphis and Shelby County," by T.S. Chang, P.S. Tang, C.S. Lee and H. Hwang, 8/10/90, (PB91-125427, A09, MF-A01).
- NCEER-90-0019 "Experimental and Analytical Study of a Combined Sliding Disc Bearing and Helical Steel Spring Isolation System," by M.C. Constantinou, A.S. Mokha and A.M. Reinhorn, 10/4/90, (PB91-125385, A06, MF-A01). This report is available only through NTIS (see address given above).
- NCEER-90-0020 "Experimental Study and Analytical Prediction of Earthquake Response of a Sliding Isolation System with a Spherical Surface," by A.S. Mokha, M.C. Constantinou and A.M. Reinhorn, 10/11/90, (PB91-125419, A05, MF-A01).
- NCEER-90-0021 "Dynamic Interaction Factors for Floating Pile Groups," by G. Gazetas, K. Fan, A. Kaynia and E. Kausel, 9/10/90, (PB91-170381, A05, MF-A01).
- NCEER-90-0022 "Evaluation of Seismic Damage Indices for Reinforced Concrete Structures," by S. Rodriguez-Gomez and A.S. Cakmak, 9/30/90, PB91-171322, A06, MF-A01).
- NCEER-90-0023 "Study of Site Response at a Selected Memphis Site," by H. Desai, S. Ahmad, E.S. Gazetas and M.R. Oh, 10/11/90, (PB91-196857, A03, MF-A01).
- NCEER-90-0024 "A User's Guide to Strongmo: Version 1.0 of NCEER's Strong-Motion Data Access Tool for PCs and Terminals," by P.A. Friberg and C.A.T. Susch, 11/15/90, (PB91-171272, A03, MF-A01).
- NCEER-90-0025 "A Three-Dimensional Analytical Study of Spatial Variability of Seismic Ground Motions," by L-L. Hong and A.H.-S. Ang, 10/30/90, (PB91-170399, A09, MF-A01).
- NCEER-90-0026 "MUMOID User's Guide - A Program for the Identification of Modal Parameters," by S. Rodriguez-Gomez and E. DiPasquale, 9/30/90, (PB91-171298, A04, MF-A01).
- NCEER-90-0027 "SARCF-II User's Guide - Seismic Analysis of Reinforced Concrete Frames," by S. Rodriguez-Gomez, Y.S. Chung and C. Meyer, 9/30/90, (PB91-171280, A05, MF-A01).
- NCEER-90-0028 "Viscous Dampers: Testing, Modeling and Application in Vibration and Seismic Isolation," by N. Makris and M.C. Constantinou, 12/20/90 (PB91-190561, A06, MF-A01).
- NCEER-90-0029 "Soil Effects on Earthquake Ground Motions in the Memphis Area," by H. Hwang, C.S. Lee, K.W. Ng and T.S. Chang, 8/2/90, (PB91-190751, A05, MF-A01).

- NCEER-91-0001 "Proceedings from the Third Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction, December 17-19, 1990," edited by T.D. O'Rourke and M. Hamada, 2/1/91, (PB91-179259, A99, MF-A04).
- NCEER-91-0002 "Physical Space Solutions of Non-Proportionally Damped Systems," by M. Tong, Z. Liang and G.C. Lee, 1/15/91, (PB91-179242, A04, MF-A01).
- NCEER-91-0003 "Seismic Response of Single Piles and Pile Groups," by K. Fan and G. Gazetas, 1/10/91, (PB92-174994, A04, MF-A01).
- NCEER-91-0004 "Damping of Structures: Part 1 - Theory of Complex Damping," by Z. Liang and G. Lee, 10/10/91, (PB92-197235, A12, MF-A03).
- NCEER-91-0005 "3D-BASIS - Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures: Part II," by S. Nagarajaiah, A.M. Reinhorn and M.C. Constantinou, 2/28/91, (PB91-190553, A07, MF-A01). This report has been replaced by NCEER-93-0011.
- NCEER-91-0006 "A Multidimensional Hysteretic Model for Plasticity Deforming Metals in Energy Absorbing Devices," by E.J. Graesser and F.A. Cozzarelli, 4/9/91, (PB92-108364, A04, MF-A01).
- NCEER-91-0007 "A Framework for Customizable Knowledge-Based Expert Systems with an Application to a KBES for Evaluating the Seismic Resistance of Existing Buildings," by E.G. Ibarra-Anaya and S.J. Fennes, 4/9/91, (PB91-210930, A08, MF-A01).
- NCEER-91-0008 "Nonlinear Analysis of Steel Frames with Semi-Rigid Connections Using the Capacity Spectrum Method," by G.G. Deierlein, S-H. Hsieh, Y-J. Shen and J.F. Abel, 7/2/91, (PB92-113828, A05, MF-A01).
- NCEER-91-0009 "Earthquake Education Materials for Grades K-12," by K.E.K. Ross, 4/30/91, (PB91-212142, A06, MF-A01). This report has been replaced by NCEER-92-0018.
- NCEER-91-0010 "Phase Wave Velocities and Displacement Phase Differences in a Harmonically Oscillating Pile," by N. Makris and G. Gazetas, 7/8/91, (PB92-108356, A04, MF-A01).
- NCEER-91-0011 "Dynamic Characteristics of a Full-Size Five-Story Steel Structure and a 2/5 Scale Model," by K.C. Chang, G.C. Yao, G.C. Lee, D.S. Hao and Y.C. Yeh," 7/2/91, (PB93-116648, A06, MF-A02).
- NCEER-91-0012 "Seismic Response of a 2/5 Scale Steel Structure with Added Viscoelastic Dampers," by K.C. Chang, T.T. Soong, S-T. Oh and M.L. Lai, 5/17/91, (PB92-110816, A05, MF-A01).
- NCEER-91-0013 "Earthquake Response of Retaining Walls; Full-Scale Testing and Computational Modeling," by S. Alampalli and A-W.M. Elgamel, 6/20/91, to be published.
- NCEER-91-0014 "3D-BASIS-M: Nonlinear Dynamic Analysis of Multiple Building Base Isolated Structures," by P.C. Tsopelas, S. Nagarajaiah, M.C. Constantinou and A.M. Reinhorn, 5/28/91, (PB92-113885, A09, MF-A02).
- NCEER-91-0015 "Evaluation of SEAOC Design Requirements for Sliding Isolated Structures," by D. Theodossiou and M.C. Constantinou, 6/10/91, (PB92-114602, A11, MF-A03).
- NCEER-91-0016 "Closed-Loop Modal Testing of a 27-Story Reinforced Concrete Flat Plate-Core Building," by H.R. Somaprasad, T. Toksoy, H. Yoshiyuki and A.E. Aktan, 7/15/91, (PB92-129980, A07, MF-A02).
- NCEER-91-0017 "Shake Table Test of a 1/6 Scale Two-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB92-222447, A06, MF-A02).
- NCEER-91-0018 "Shake Table Test of a 1/8 Scale Three-Story Lightly Reinforced Concrete Building," by A.G. El-Attar, R.N. White and P. Gergely, 2/28/91, (PB93-116630, A08, MF-A02).
- NCEER-91-0019 "Transfer Functions for Rigid Rectangular Foundations," by A.S. Veletsos, A.M. Prasad and W.H. Wu, 7/31/91, to be published.

- NCEER-91-0020 "Hybrid Control of Seismic-Excited Nonlinear and Inelastic Structural Systems," by J.N. Yang, Z. Li and A. Daniellians, 8/1/91, (PB92-143171, A06, MF-A02).
- NCEER-91-0021 "The NCEER-91 Earthquake Catalog: Improved Intensity-Based Magnitudes and Recurrence Relations for U.S. Earthquakes East of New Madrid," by L. Seeber and J.G. Armbruster, 8/28/91, (PB92-176742, A06, MF-A02).
- NCEER-91-0022 "Proceedings from the Implementation of Earthquake Planning and Education in Schools: The Need for Change - The Roles of the Changemakers," by K.E.K. Ross and F. Winslow, 7/23/91, (PB92-129998, A12, MF-A03).
- NCEER-91-0023 "A Study of Reliability-Based Criteria for Seismic Design of Reinforced Concrete Frame Buildings," by H.H.M. Hwang and H-M. Hsu, 8/10/91, (PB92-140235, A09, MF-A02).
- NCEER-91-0024 "Experimental Verification of a Number of Structural System Identification Algorithms," by R.G. Ghanem, H. Gavin and M. Shinozuka, 9/18/91, (PB92-176577, A18, MF-A04).
- NCEER-91-0025 "Probabilistic Evaluation of Liquefaction Potential," by H.H.M. Hwang and C.S. Lee," 11/25/91, (PB92-143429, A05, MF-A01).
- NCEER-91-0026 "Instantaneous Optimal Control for Linear, Nonlinear and Hysteretic Structures - Stable Controllers," by J.N. Yang and Z. Li, 11/15/91, (PB92-163807, A04, MF-A01).
- NCEER-91-0027 "Experimental and Theoretical Study of a Sliding Isolation System for Bridges," by M.C. Constantinou, A. Kartoum, A.M. Reinhorn and P. Bradford, 11/15/91, (PB92-176973, A10, MF-A03).
- NCEER-92-0001 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 1: Japanese Case Studies," Edited by M. Hamada and T. O'Rourke, 2/17/92, (PB92-197243, A18, MF-A04).
- NCEER-92-0002 "Case Studies of Liquefaction and Lifeline Performance During Past Earthquakes, Volume 2: United States Case Studies," Edited by T. O'Rourke and M. Hamada, 2/17/92, (PB92-197250, A20, MF-A04).
- NCEER-92-0003 "Issues in Earthquake Education," Edited by K. Ross, 2/3/92, (PB92-222389, A07, MF-A02).
- NCEER-92-0004 "Proceedings from the First U.S. - Japan Workshop on Earthquake Protective Systems for Bridges," Edited by I.G. Buckle, 2/4/92, (PB94-142239, A99, MF-A06).
- NCEER-92-0005 "Seismic Ground Motion from a Haskell-Type Source in a Multiple-Layered Half-Space," A.P. Theoharis, G. Deodatis and M. Shinozuka, 1/2/92, to be published.
- NCEER-92-0006 "Proceedings from the Site Effects Workshop," Edited by R. Whitman, 2/29/92, (PB92-197201, A04, MF-A01).
- NCEER-92-0007 "Engineering Evaluation of Permanent Ground Deformations Due to Seismically-Induced Liquefaction," by M.H. Baziar, R. Dobry and A-W.M. Elgamal, 3/24/92, (PB92-222421, A13, MF-A03).
- NCEER-92-0008 "A Procedure for the Seismic Evaluation of Buildings in the Central and Eastern United States," by C.D. Poland and J.O. Malley, 4/2/92, (PB92-222439, A20, MF-A04).
- NCEER-92-0009 "Experimental and Analytical Study of a Hybrid Isolation System Using Friction Controllable Sliding Bearings," by M.Q. Feng, S. Fujii and M. Shinozuka, 5/15/92, (PB93-150282, A06, MF-A02).
- NCEER-92-0010 "Seismic Resistance of Slab-Column Connections in Existing Non-Ductile Flat-Plate Buildings," by A.J. Durrani and Y. Du, 5/18/92, (PB93-116812, A06, MF-A02).
- NCEER-92-0011 "The Hysteretic and Dynamic Behavior of Brick Masonry Walls Upgraded by Ferrocement Coatings Under Cyclic Loading and Strong Simulated Ground Motion," by H. Lee and S.P. Prawl, 5/11/92, to be published.
- NCEER-92-0012 "Study of Wire Rope Systems for Seismic Protection of Equipment in Buildings," by G.F. Demetriades, M.C. Constantinou and A.M. Reinhorn, 5/20/92, (PB93-116655, A08, MF-A02).

- NCEER-92-0013 "Shape Memory Structural Dampers: Material Properties, Design and Seismic Testing," by P.R. Witting and F.A. Cozzarelli, 5/26/92, (PB93-116663, A05, MF-A01).
- NCEER-92-0014 "Longitudinal Permanent Ground Deformation Effects on Buried Continuous Pipelines," by M.J. O'Rourke, and C. Nordberg, 6/15/92, (PB93-116671, A08, MF-A02).
- NCEER-92-0015 "A Simulation Method for Stationary Gaussian Random Functions Based on the Sampling Theorem," by M. Grigoriu and S. Balopoulou, 6/11/92, (PB93-127496, A05, MF-A01).
- NCEER-92-0016 "Gravity-Load-Designed Reinforced Concrete Buildings: Seismic Evaluation of Existing Construction and Detailing Strategies for Improved Seismic Resistance," by G.W. Hoffmann, S.K. Kunnath, A.M. Reinhorn and J.B. Mander, 7/15/92, (PB94-142007, A08, MF-A02).
- NCEER-92-0017 "Observations on Water System and Pipeline Performance in the Limón Area of Costa Rica Due to the April 22, 1991 Earthquake," by M. O'Rourke and D. Ballantyne, 6/30/92, (PB93-126811, A06, MF-A02).
- NCEER-92-0018 "Fourth Edition of Earthquake Education Materials for Grades K-12," Edited by K.E.K. Ross, 8/10/92, (PB93-114023, A07, MF-A02).
- NCEER-92-0019 "Proceedings from the Fourth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures for Soil Liquefaction," Edited by M. Hamada and T.D. O'Rourke, 8/12/92, (PB93-163939, A99, MF-E11).
- NCEER-92-0020 "Active Bracing System: A Full Scale Implementation of Active Control," by A.M. Reinhorn, T.T. Soong, R.C. Lin, M.A. Riley, Y.P. Wang, S. Aizawa and M. Higashino, 8/14/92, (PB93-127512, A06, MF-A02).
- NCEER-92-0021 "Empirical Analysis of Horizontal Ground Displacement Generated by Liquefaction-Induced Lateral Spreads," by S.F. Bartlett and T.L. Youd, 8/17/92, (PB93-188241, A06, MF-A02).
- NCEER-92-0022 "IDARC Version 3.0: Inelastic Damage Analysis of Reinforced Concrete Structures," by S.K. Kunnath, A.M. Reinhorn and R.F. Lobo, 8/31/92, (PB93-227502, A07, MF-A02).
- NCEER-92-0023 "A Semi-Empirical Analysis of Strong-Motion Peaks in Terms of Seismic Source, Propagation Path and Local Site Conditions, by M. Kamiyama, M.J. O'Rourke and R. Flores-Berrones, 9/9/92, (PB93-150266, A08, MF-A02).
- NCEER-92-0024 "Seismic Behavior of Reinforced Concrete Frame Structures with Nonductile Details, Part I: Summary of Experimental Findings of Full Scale Beam-Column Joint Tests," by A. Beres, R.N. White and P. Gergely, 9/30/92, (PB93-227783, A05, MF-A01).
- NCEER-92-0025 "Experimental Results of Repaired and Retrofitted Beam-Column Joint Tests in Lightly Reinforced Concrete Frame Buildings," by A. Beres, S. El-Borgi, R.N. White and P. Gergely, 10/29/92, (PB93-227791, A05, MF-A01).
- NCEER-92-0026 "A Generalization of Optimal Control Theory: Linear and Nonlinear Structures," by J.N. Yang, Z. Li and S. Vongchavalitkul, 11/2/92, (PB93-188621, A05, MF-A01).
- NCEER-92-0027 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part I - Design and Properties of a One-Third Scale Model Structure," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB94-104502, A08, MF-A02).
- NCEER-92-0028 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part II - Experimental Performance of Subassemblages," by L.E. Aycaardi, J.B. Mander and A.M. Reinhorn, 12/1/92, (PB94-104510, A08, MF-A02).
- NCEER-92-0029 "Seismic Resistance of Reinforced Concrete Frame Structures Designed Only for Gravity Loads: Part III - Experimental Performance and Analytical Study of a Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/1/92, (PB93-227528, A09, MF-A01).

- NCEER-92-0030 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part I - Experimental Performance of Retrofitted Subassemblages," by D. Choudhuri, J.B. Mander and A.M. Reinhorn, 12/8/92, (PB93-198307, A07, MF-A02).
- NCEER-92-0031 "Evaluation of Seismic Retrofit of Reinforced Concrete Frame Structures: Part II - Experimental Performance and Analytical Study of a Retrofitted Structural Model," by J.M. Bracci, A.M. Reinhorn and J.B. Mander, 12/8/92, (PB93-198315, A09, MF-A03).
- NCEER-92-0032 "Experimental and Analytical Investigation of Seismic Response of Structures with Supplemental Fluid Viscous Dampers," by M.C. Constantinou and M.D. Symans, 12/21/92, (PB93-191435, A10, MF-A03). This report is available only through NTIS (see address given above).
- NCEER-92-0033 "Reconnaissance Report on the Cairo, Egypt Earthquake of October 12, 1992," by M. Khater, 12/23/92, (PB93-188621, A03, MF-A01).
- NCEER-92-0034 "Low-Level Dynamic Characteristics of Four Tall Flat-Plate Buildings in New York City," by H. Gavin, S. Yuan, J. Grossman, E. Pekelis and K. Jacob, 12/28/92, (PB93-188217, A07, MF-A02).
- NCEER-93-0001 "An Experimental Study on the Seismic Performance of Brick-Infilled Steel Frames With and Without Retrofit," by J.B. Mander, B. Nair, K. Wojtkowski and J. Ma, 1/29/93, (PB93-227510, A07, MF-A02).
- NCEER-93-0002 "Social Accounting for Disaster Preparedness and Recovery Planning," by S. Cole, E. Pantoja and V. Razak, 2/22/93, (PB94-142114, A12, MF-A03).
- NCEER-93-0003 "Assessment of 1991 NEHRP Provisions for Nonstructural Components and Recommended Revisions," by T.T. Soong, G. Chen, Z. Wu, R-H. Zhang and M. Grigoriu, 3/1/93, (PB93-188639, A06, MF-A02).
- NCEER-93-0004 "Evaluation of Static and Response Spectrum Analysis Procedures of SEAOC/UBC for Seismic Isolated Structures," by C.W. Winters and M.C. Constantinou, 3/23/93, (PB93-198299, A10, MF-A03).
- NCEER-93-0005 "Earthquakes in the Northeast - Are We Ignoring the Hazard? A Workshop on Earthquake Science and Safety for Educators," edited by K.E.K. Ross, 4/2/93, (PB94-103066, A09, MF-A02).
- NCEER-93-0006 "Inelastic Response of Reinforced Concrete Structures with Viscoelastic Braces," by R.F. Lobo, J.M. Bracci, K.L. Shen, A.M. Reinhorn and T.T. Soong, 4/5/93, (PB93-227486, A05, MF-A02).
- NCEER-93-0007 "Seismic Testing of Installation Methods for Computers and Data Processing Equipment," by K. Kosar, T.T. Soong, K.L. Shen, J.A. HoLung and Y.K. Lin, 4/12/93, (PB93-198299, A07, MF-A02).
- NCEER-93-0008 "Retrofit of Reinforced Concrete Frames Using Added Dampers," by A. Reinhorn, M. Constantinou and C. Li, to be published.
- NCEER-93-0009 "Seismic Behavior and Design Guidelines for Steel Frame Structures with Added Viscoelastic Dampers," by K.C. Chang, M.L. Lai, T.T. Soong, D.S. Hao and Y.C. Yeh, 5/1/93, (PB94-141959, A07, MF-A02).
- NCEER-93-0010 "Seismic Performance of Shear-Critical Reinforced Concrete Bridge Piers," by J.B. Mander, S.M. Waheed, M.T.A. Chaudhary and S.S. Chen, 5/12/93, (PB93-227494, A08, MF-A02).
- NCEER-93-0011 "3D-BASIS-TABS: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by S. Nagarajaiah, C. Li, A.M. Reinhorn and M.C. Constantinou, 8/2/93, (PB94-141819, A09, MF-A02).
- NCEER-93-0012 "Effects of Hydrocarbon Spills from an Oil Pipeline Break on Ground Water," by O.J. Helweg and H.H.M. Hwang, 8/3/93, (PB94-141942, A06, MF-A02).
- NCEER-93-0013 "Simplified Procedures for Seismic Design of Nonstructural Components and Assessment of Current Code Provisions," by M.P. Singh, L.E. Suarez, E.E. Matheu and G.O. Maldonado, 8/4/93, (PB94-141827, A09, MF-A02).
- NCEER-93-0014 "An Energy Approach to Seismic Analysis and Design of Secondary Systems," by G. Chen and T.T. Soong, 8/6/93, (PB94-142767, A11, MF-A03).



- NCEER-93-0015 "Proceedings from School Sites: Becoming Prepared for Earthquakes - Commemorating the Third Anniversary of the Loma Prieta Earthquake," Edited by F.E. Winslow and K.E.K. Ross, 8/16/93, (PB94-154275, A16, MF-A02).
- NCEER-93-0016 "Reconnaissance Report of Damage to Historic Monuments in Cairo, Egypt Following the October 12, 1992 Dahshur Earthquake," by D. Sykora, D. Look, G. Croci, E. Karaesmen and E. Karaesmen, 8/19/93, (PB94-142221, A08, MF-A02).
- NCEER-93-0017 "The Island of Guam Earthquake of August 8, 1993," by S.W. Swan and S.K. Harris, 9/30/93, (PB94-141843, A04, MF-A01).
- NCEER-93-0018 "Engineering Aspects of the October 12, 1992 Egyptian Earthquake," by A.W. Elgamal, M. Amer, K. Adalier and A. Abul-Fadl, 10/7/93, (PB94-141983, A05, MF-A01).
- NCEER-93-0019 "Development of an Earthquake Motion Simulator and its Application in Dynamic Centrifuge Testing," by I. Krstelj, Supervised by J.H. Prevost, 10/23/93, (PB94-181773, A-10, MF-A03).
- NCEER-93-0020 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a Friction Pendulum System (FPS)," by M.C. Constantinou, P. Tsopelas, Y-S. Kim and S. Okamoto, 11/1/93, (PB94-142775, A08, MF-A02).
- NCEER-93-0021 "Finite Element Modeling of Elastomeric Seismic Isolation Bearings," by L.J. Billings, Supervised by R. Shepherd, 11/8/93, to be published.
- NCEER-93-0022 "Seismic Vulnerability of Equipment in Critical Facilities: Life-Safety and Operational Consequences," by K. Porter, G.S. Johnson, M.M. Zadeh, C. Scawthorn and S. Eder, 11/24/93, (PB94-181765, A16, MF-A03).
- NCEER-93-0023 "Hokkaido Nansei-oki, Japan Earthquake of July 12, 1993, by P.I. Yanev and C.R. Scawthorn, 12/23/93, (PB94-181500, A07, MF-A01).
- NCEER-94-0001 "An Evaluation of Seismic Serviceability of Water Supply Networks with Application to the San Francisco Auxiliary Water Supply System," by I. Markov, Supervised by M. Grigoriu and T. O'Rourke, 1/21/94, (PB94-204013, A07, MF-A02).
- NCEER-94-0002 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of Systems Consisting of Sliding Bearings, Rubber Restoring Force Devices and Fluid Dampers," Volumes I and II, by P. Tsopelas, S. Okamoto, M.C. Constantinou, D. Ozaki and S. Fujii, 2/4/94, (PB94-181740, A09, MF-A02 and PB94-181757, A12, MF-A03).
- NCEER-94-0003 "A Markov Model for Local and Global Damage Indices in Seismic Analysis," by S. Rahman and M. Grigoriu, 2/18/94, (PB94-206000, A12, MF-A03).
- NCEER-94-0004 "Proceedings from the NCEER Workshop on Seismic Response of Masonry Infills," edited by D.P. Abrams, 3/1/94, (PB94-180783, A07, MF-A02).
- NCEER-94-0005 "The Northridge, California Earthquake of January 17, 1994: General Reconnaissance Report," edited by J.D. Goltz, 3/11/94, (PB94-193943, A10, MF-A03).
- NCEER-94-0006 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part I - Evaluation of Seismic Capacity," by G.A. Chang and J.B. Mander, 3/14/94, (PB94-219185, A11, MF-A03).
- NCEER-94-0007 "Seismic Isolation of Multi-Story Frame Structures Using Spherical Sliding Isolation Systems," by T.M. Al-Hussaini, V.A. Zayas and M.C. Constantinou, 3/17/94, (PB94-193745, A09, MF-A02).
- NCEER-94-0008 "The Northridge, California Earthquake of January 17, 1994: Performance of Highway Bridges," edited by I.G. Buckle, 3/24/94, (PB94-193851, A06, MF-A02).
- NCEER-94-0009 "Proceedings of the Third U.S.-Japan Workshop on Earthquake Protective Systems for Bridges," edited by I.G. Buckle and I. Friedland, 3/31/94, (PB94-195815, A99, MF-A06).

- NCEER-94-0010 "3D-BASIS-ME: Computer Program for Nonlinear Dynamic Analysis of Seismically Isolated Single and Multiple Structures and Liquid Storage Tanks," by P.C. Tsopelas, M.C. Constantinou and A.M. Reinhorn, 4/12/94, (PB94-204922, A09, MF-A02).
- NCEER-94-0011 "The Northridge, California Earthquake of January 17, 1994: Performance of Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/16/94, (PB94-204989, A05, MF-A01).
- NCEER-94-0012 "Feasibility Study of Replacement Procedures and Earthquake Performance Related to Gas Transmission Pipelines," by T.D. O'Rourke and M.C. Palmer, 5/25/94, (PB94-206638, A09, MF-A02).
- NCEER-94-0013 "Seismic Energy Based Fatigue Damage Analysis of Bridge Columns: Part II - Evaluation of Seismic Demand," by G.A. Chang and J.B. Mander, 6/1/94, (PB95-18106, A08, MF-A02).
- NCEER-94-0014 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Sliding Bearings and Fluid Restoring Force/Damping Devices," by P. Tsopelas and M.C. Constantinou, 6/13/94, (PB94-219144, A10, MF-A03).
- NCEER-94-0015 "Generation of Hazard-Consistent Fragility Curves for Seismic Loss Estimation Studies," by H. Hwang and J-R. Huo, 6/14/94, (PB95-181996, A09, MF-A02).
- NCEER-94-0016 "Seismic Study of Building Frames with Added Energy-Absorbing Devices," by W.S. Pong, C.S. Tsai and G.C. Lee, 6/20/94, (PB94-219136, A10, A03).
- NCEER-94-0017 "Sliding Mode Control for Seismic-Excited Linear and Nonlinear Civil Engineering Structures," by J. Yang, J. Wu, A. Agrawal and Z. Li, 6/21/94, (PB95-138483, A06, MF-A02).
- NCEER-94-0018 "3D-BASIS-TABS Version 2.0: Computer Program for Nonlinear Dynamic Analysis of Three Dimensional Base Isolated Structures," by A.M. Reinhorn, S. Nagarajaiah, M.C. Constantinou, P. Tsopelas and R. Li, 6/22/94, (PB95-182176, A08, MF-A02).
- NCEER-94-0019 "Proceedings of the International Workshop on Civil Infrastructure Systems: Application of Intelligent Systems and Advanced Materials on Bridge Systems," Edited by G.C. Lee and K.C. Chang, 7/18/94, (PB95-252474, A20, MF-A04).
- NCEER-94-0020 "Study of Seismic Isolation Systems for Computer Floors," by V. Lambrou and M.C. Constantinou, 7/19/94, (PB95-138533, A10, MF-A03).
- NCEER-94-0021 "Proceedings of the U.S.-Italian Workshop on Guidelines for Seismic Evaluation and Rehabilitation of Unreinforced Masonry Buildings," Edited by D.P. Abrams and G.M. Calvi, 7/20/94, (PB95-138749, A13, MF-A03).
- NCEER-94-0022 "NCEER-Taisei Corporation Research Program on Sliding Seismic Isolation Systems for Bridges: Experimental and Analytical Study of a System Consisting of Lubricated PTFE Sliding Bearings and Mild Steel Dampers," by P. Tsopelas and M.C. Constantinou, 7/22/94, (PB95-182184, A08, MF-A02).
- NCEER-94-0023 "Development of Reliability-Based Design Criteria for Buildings Under Seismic Load," by Y.K. Wen, H. Hwang and M. Shinozuka, 8/1/94, (PB95-211934, A08, MF-A02).
- NCEER-94-0024 "Experimental Verification of Acceleration Feedback Control Strategies for an Active Tendon System," by S.J. Dyke, B.F. Spencer, Jr., P. Quast, M.K. Sain, D.C. Kaspari, Jr. and T.T. Soong, 8/29/94, (PB95-212320, A05, MF-A01).
- NCEER-94-0025 "Seismic Retrofitting Manual for Highway Bridges," Edited by I.G. Buckle and I.F. Friedland, published by the Federal Highway Administration (PB95-212676, A15, MF-A03).
- NCEER-94-0026 "Proceedings from the Fifth U.S.-Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction," Edited by T.D. O'Rourke and M. Hamada, 11/7/94, (PB95-220802, A99, MF-E08).

- NCEER-95-0001 “Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part 1 - Fluid Viscous Damping Devices,” by A.M. Reinhorn, C. Li and M.C. Constantinou, 1/3/95, (PB95-266599, A09, MF-A02).
- NCEER-95-0002 “Experimental and Analytical Study of Low-Cycle Fatigue Behavior of Semi-Rigid Top-And-Seat Angle Connections,” by G. Pekcan, J.B. Mander and S.S. Chen, 1/5/95, (PB95-220042, A07, MF-A02).
- NCEER-95-0003 “NCEER-ATC Joint Study on Fragility of Buildings,” by T. Anagnos, C. Rojahn and A.S. Kiremidjian, 1/20/95, (PB95-220026, A06, MF-A02).
- NCEER-95-0004 “Nonlinear Control Algorithms for Peak Response Reduction,” by Z. Wu, T.T. Soong, V. Gattulli and R.C. Lin, 2/16/95, (PB95-220349, A05, MF-A01).
- NCEER-95-0005 “Pipeline Replacement Feasibility Study: A Methodology for Minimizing Seismic and Corrosion Risks to Underground Natural Gas Pipelines,” by R.T. Eguchi, H.A. Seligson and D.G. Honegger, 3/2/95, (PB95-252326, A06, MF-A02).
- NCEER-95-0006 “Evaluation of Seismic Performance of an 11-Story Frame Building During the 1994 Northridge Earthquake,” by F. Naeim, R. DiSulio, K. Benuska, A. Reinhorn and C. Li, to be published.
- NCEER-95-0007 “Prioritization of Bridges for Seismic Retrofitting,” by N. Basöz and A.S. Kiremidjian, 4/24/95, (PB95-252300, A08, MF-A02).
- NCEER-95-0008 “Method for Developing Motion Damage Relationships for Reinforced Concrete Frames,” by A. Singhal and A.S. Kiremidjian, 5/11/95, (PB95-266607, A06, MF-A02).
- NCEER-95-0009 “Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part II - Friction Devices,” by C. Li and A.M. Reinhorn, 7/6/95, (PB96-128087, A11, MF-A03).
- NCEER-95-0010 “Experimental Performance and Analytical Study of a Non-Ductile Reinforced Concrete Frame Structure Retrofitted with Elastomeric Spring Dampers,” by G. Pekcan, J.B. Mander and S.S. Chen, 7/14/95, (PB96-137161, A08, MF-A02).
- NCEER-95-0011 “Development and Experimental Study of Semi-Active Fluid Damping Devices for Seismic Protection of Structures,” by M.D. Symans and M.C. Constantinou, 8/3/95, (PB96-136940, A23, MF-A04).
- NCEER-95-0012 “Real-Time Structural Parameter Modification (RSPM): Development of Innervated Structures,” by Z. Liang, M. Tong and G.C. Lee, 4/11/95, (PB96-137153, A06, MF-A01).
- NCEER-95-0013 “Experimental and Analytical Investigation of Seismic Retrofit of Structures with Supplemental Damping: Part III - Viscous Damping Walls,” by A.M. Reinhorn and C. Li, 10/1/95, (PB96-176409, A11, MF-A03).
- NCEER-95-0014 “Seismic Fragility Analysis of Equipment and Structures in a Memphis Electric Substation,” by J-R. Huo and H.H.M. Hwang, 8/10/95, (PB96-128087, A09, MF-A02).
- NCEER-95-0015 “The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Lifelines,” Edited by M. Shinozuka, 11/3/95, (PB96-176383, A15, MF-A03).
- NCEER-95-0016 “Highway Culvert Performance During Earthquakes,” by T.L. Youd and C.J. Beckman, available as NCEER-96-0015.
- NCEER-95-0017 “The Hanshin-Awaji Earthquake of January 17, 1995: Performance of Highway Bridges,” Edited by I.G. Buckle, 12/1/95, to be published.
- NCEER-95-0018 “Modeling of Masonry Infill Panels for Structural Analysis,” by A.M. Reinhorn, A. Madan, R.E. Valles, Y. Reichmann and J.B. Mander, 12/8/95, (PB97-110886, MF-A01, A06).
- NCEER-95-0019 “Optimal Polynomial Control for Linear and Nonlinear Structures,” by A.K. Agrawal and J.N. Yang, 12/11/95, (PB96-168737, A07, MF-A02).

- NCEER-95-0020 “Retrofit of Non-Ductile Reinforced Concrete Frames Using Friction Dampers,” by R.S. Rao, P. Gergely and R.N. White, 12/22/95, (PB97-133508, A10, MF-A02).
- NCEER-95-0021 “Parametric Results for Seismic Response of Pile-Supported Bridge Bents,” by G. Mylonakis, A. Nikolaou and G. Gazetas, 12/22/95, (PB97-100242, A12, MF-A03).
- NCEER-95-0022 “Kinematic Bending Moments in Seismically Stressed Piles,” by A. Nikolaou, G. Mylonakis and G. Gazetas, 12/23/95, (PB97-113914, MF-A03, A13).
- NCEER-96-0001 “Dynamic Response of Unreinforced Masonry Buildings with Flexible Diaphragms,” by A.C. Costley and D.P. Abrams, 10/10/96, (PB97-133573, MF-A03, A15).
- NCEER-96-0002 “State of the Art Review: Foundations and Retaining Structures,” by I. Po Lam, to be published.
- NCEER-96-0003 “Ductility of Rectangular Reinforced Concrete Bridge Columns with Moderate Confinement,” by N. Wehbe, M. Saiidi, D. Sanders and B. Douglas, 11/7/96, (PB97-133557, A06, MF-A02).
- NCEER-96-0004 “Proceedings of the Long-Span Bridge Seismic Research Workshop,” edited by I.G. Buckle and I.M. Friedland, to be published.
- NCEER-96-0005 “Establish Representative Pier Types for Comprehensive Study: Eastern United States,” by J. Kulicki and Z. Prucz, 5/28/96, (PB98-119217, A07, MF-A02).
- NCEER-96-0006 “Establish Representative Pier Types for Comprehensive Study: Western United States,” by R. Imbsen, R.A. Schamber and T.A. Osterkamp, 5/28/96, (PB98-118607, A07, MF-A02).
- NCEER-96-0007 “Nonlinear Control Techniques for Dynamical Systems with Uncertain Parameters,” by R.G. Ghanem and M.I. Bujakov, 5/27/96, (PB97-100259, A17, MF-A03).
- NCEER-96-0008 “Seismic Evaluation of a 30-Year Old Non-Ductile Highway Bridge Pier and Its Retrofit,” by J.B. Mander, B. Mahmoodzadegan, S. Bhadra and S.S. Chen, 5/31/96, (PB97-110902, MF-A03, A10).
- NCEER-96-0009 “Seismic Performance of a Model Reinforced Concrete Bridge Pier Before and After Retrofit,” by J.B. Mander, J.H. Kim and C.A. Ligozio, 5/31/96, (PB97-110910, MF-A02, A10).
- NCEER-96-0010 “IDARC2D Version 4.0: A Computer Program for the Inelastic Damage Analysis of Buildings,” by R.E. Valles, A.M. Reinhorn, S.K. Kunnath, C. Li and A. Madan, 6/3/96, (PB97-100234, A17, MF-A03).
- NCEER-96-0011 “Estimation of the Economic Impact of Multiple Lifeline Disruption: Memphis Light, Gas and Water Division Case Study,” by S.E. Chang, H.A. Seligson and R.T. Eguchi, 8/16/96, (PB97-133490, A11, MF-A03).
- NCEER-96-0012 “Proceedings from the Sixth Japan-U.S. Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction, Edited by M. Hamada and T. O’Rourke, 9/11/96, (PB97-133581, A99, MF-A06).
- NCEER-96-0013 “Chemical Hazards, Mitigation and Preparedness in Areas of High Seismic Risk: A Methodology for Estimating the Risk of Post-Earthquake Hazardous Materials Release,” by H.A. Seligson, R.T. Eguchi, K.J. Tierney and K. Richmond, 11/7/96, (PB97-133565, MF-A02, A08).
- NCEER-96-0014 “Response of Steel Bridge Bearings to Reversed Cyclic Loading,” by J.B. Mander, D-K. Kim, S.S. Chen and G.J. Premus, 11/13/96, (PB97-140735, A12, MF-A03).
- NCEER-96-0015 “Highway Culvert Performance During Past Earthquakes,” by T.L. Youd and C.J. Beckman, 11/25/96, (PB97-133532, A06, MF-A01).
- NCEER-97-0001 “Evaluation, Prevention and Mitigation of Pounding Effects in Building Structures,” by R.E. Valles and A.M. Reinhorn, 2/20/97, (PB97-159552, A14, MF-A03).
- NCEER-97-0002 “Seismic Design Criteria for Bridges and Other Highway Structures,” by C. Rojahn, R. Mayes, D.G. Anderson, J. Clark, J.H. Hom, R.V. Nutt and M.J. O’Rourke, 4/30/97, (PB97-194658, A06, MF-A03).

- NCEER-97-0003 "Proceedings of the U.S.-Italian Workshop on Seismic Evaluation and Retrofit," Edited by D.P. Abrams and G.M. Calvi, 3/19/97, (PB97-194666, A13, MF-A03).
- NCEER-97-0004 "Investigation of Seismic Response of Buildings with Linear and Nonlinear Fluid Viscous Dampers," by A.A. Seleemah and M.C. Constantinou, 5/21/97, (PB98-109002, A15, MF-A03).
- NCEER-97-0005 "Proceedings of the Workshop on Earthquake Engineering Frontiers in Transportation Facilities," edited by G.C. Lee and I.M. Friedland, 8/29/97, (PB98-128911, A25, MR-A04).
- NCEER-97-0006 "Cumulative Seismic Damage of Reinforced Concrete Bridge Piers," by S.K. Kunnath, A. El-Bahy, A. Taylor and W. Stone, 9/2/97, (PB98-108814, A11, MF-A03).
- NCEER-97-0007 "Structural Details to Accommodate Seismic Movements of Highway Bridges and Retaining Walls," by R.A. Imbsen, R.A. Schamber, E. Thorkildsen, A. Kartoum, B.T. Martin, T.N. Rosser and J.M. Kulicki, 9/3/97, (PB98-108996, A09, MF-A02).
- NCEER-97-0008 "A Method for Earthquake Motion-Damage Relationships with Application to Reinforced Concrete Frames," by A. Singhal and A.S. Kiremidjian, 9/10/97, (PB98-108988, A13, MF-A03).
- NCEER-97-0009 "Seismic Analysis and Design of Bridge Abutments Considering Sliding and Rotation," by K. Fishman and R. Richards, Jr., 9/15/97, (PB98-108897, A06, MF-A02).
- NCEER-97-0010 "Proceedings of the FHWA/NCEER Workshop on the National Representation of Seismic Ground Motion for New and Existing Highway Facilities," edited by I.M. Friedland, M.S. Power and R.L. Mayes, 9/22/97, (PB98-128903, A21, MF-A04).
- NCEER-97-0011 "Seismic Analysis for Design or Retrofit of Gravity Bridge Abutments," by K.L. Fishman, R. Richards, Jr. and R.C. Divito, 10/2/97, (PB98-128937, A08, MF-A02).
- NCEER-97-0012 "Evaluation of Simplified Methods of Analysis for Yielding Structures," by P. Tsopelas, M.C. Constantinou, C.A. Kircher and A.S. Whittaker, 10/31/97, (PB98-128929, A10, MF-A03).
- NCEER-97-0013 "Seismic Design of Bridge Columns Based on Control and Repairability of Damage," by C-T. Cheng and J.B. Mander, 12/8/97, (PB98-144249, A11, MF-A03).
- NCEER-97-0014 "Seismic Resistance of Bridge Piers Based on Damage Avoidance Design," by J.B. Mander and C-T. Cheng, 12/10/97, (PB98-144223, A09, MF-A02).
- NCEER-97-0015 "Seismic Response of Nominally Symmetric Systems with Strength Uncertainty," by S. Balopoulou and M. Grigoriu, 12/23/97, (PB98-153422, A11, MF-A03).
- NCEER-97-0016 "Evaluation of Seismic Retrofit Methods for Reinforced Concrete Bridge Columns," by T.J. Wipf, F.W. Klaiber and F.M. Russo, 12/28/97, (PB98-144215, A12, MF-A03).
- NCEER-97-0017 "Seismic Fragility of Existing Conventional Reinforced Concrete Highway Bridges," by C.L. Mullen and A.S. Cakmak, 12/30/97, (PB98-153406, A08, MF-A02).
- NCEER-97-0018 "Loss Assessment of Memphis Buildings," edited by D.P. Abrams and M. Shinozuka, 12/31/97, (PB98-144231, A13, MF-A03).
- NCEER-97-0019 "Seismic Evaluation of Frames with Infill Walls Using Quasi-static Experiments," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153455, A07, MF-A02).
- NCEER-97-0020 "Seismic Evaluation of Frames with Infill Walls Using Pseudo-dynamic Experiments," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153430, A07, MF-A02).
- NCEER-97-0021 "Computational Strategies for Frames with Infill Walls: Discrete and Smeared Crack Analyses and Seismic Fragility," by K.M. Mosalam, R.N. White and P. Gergely, 12/31/97, (PB98-153414, A10, MF-A02).

- NCEER-97-0022 "Proceedings of the NCEER Workshop on Evaluation of Liquefaction Resistance of Soils," edited by T.L. Youd and I.M. Idriss, 12/31/97, (PB98-155617, A15, MF-A03).
- MCEER-98-0001 "Extraction of Nonlinear Hysteretic Properties of Seismically Isolated Bridges from Quick-Release Field Tests," by Q. Chen, B.M. Douglas, E.M. Maragakis and I.G. Buckle, 5/26/98, (PB99-118838, A06, MF-A01).
- MCEER-98-0002 "Methodologies for Evaluating the Importance of Highway Bridges," by A. Thomas, S. Eshenaur and J. Kulicki, 5/29/98, (PB99-118846, A10, MF-A02).
- MCEER-98-0003 "Capacity Design of Bridge Piers and the Analysis of Overstrength," by J.B. Mander, A. Dutta and P. Goel, 6/1/98, (PB99-118853, A09, MF-A02).
- MCEER-98-0004 "Evaluation of Bridge Damage Data from the Loma Prieta and Northridge, California Earthquakes," by N. Basoz and A. Kiremidjian, 6/2/98, (PB99-118861, A15, MF-A03).
- MCEER-98-0005 "Screening Guide for Rapid Assessment of Liquefaction Hazard at Highway Bridge Sites," by T. L. Youd, 6/16/98, (PB99-118879, A06, not available on microfiche).
- MCEER-98-0006 "Structural Steel and Steel/Concrete Interface Details for Bridges," by P. Ritchie, N. Kaulh and J. Kulicki, 7/13/98, (PB99-118945, A06, MF-A01).
- MCEER-98-0007 "Capacity Design and Fatigue Analysis of Confined Concrete Columns," by A. Dutta and J.B. Mander, 7/14/98, (PB99-118960, A14, MF-A03).
- MCEER-98-0008 "Proceedings of the Workshop on Performance Criteria for Telecommunication Services Under Earthquake Conditions," edited by A.J. Schiff, 7/15/98, (PB99-118952, A08, MF-A02).
- MCEER-98-0009 "Fatigue Analysis of Unconfined Concrete Columns," by J.B. Mander, A. Dutta and J.H. Kim, 9/12/98, (PB99-123655, A10, MF-A02).
- MCEER-98-0010 "Centrifuge Modeling of Cyclic Lateral Response of Pile-Cap Systems and Seat-Type Abutments in Dry Sands," by A.D. Gadre and R. Dobry, 10/2/98, (PB99-123606, A13, MF-A03).
- MCEER-98-0011 "IDARC-BRIDGE: A Computational Platform for Seismic Damage Assessment of Bridge Structures," by A.M. Reinhorn, V. Simeonov, G. Mylonakis and Y. Reichman, 10/2/98, (PB99-162919, A15, MF-A03).
- MCEER-98-0012 "Experimental Investigation of the Dynamic Response of Two Bridges Before and After Retrofitting with Elastomeric Bearings," by D.A. Wendichansky, S.S. Chen and J.B. Mander, 10/2/98, (PB99-162927, A15, MF-A03).
- MCEER-98-0013 "Design Procedures for Hinge Restrainers and Hinge Sear Width for Multiple-Frame Bridges," by R. Des Roches and G.L. Fenves, 11/3/98, (PB99-140477, A13, MF-A03).
- MCEER-98-0014 "Response Modification Factors for Seismically Isolated Bridges," by M.C. Constantinou and J.K. Quarshie, 11/3/98, (PB99-140485, A14, MF-A03).
- MCEER-98-0015 "Proceedings of the U.S.-Italy Workshop on Seismic Protective Systems for Bridges," edited by I.M. Friedland and M.C. Constantinou, 11/3/98, (PB2000-101711, A22, MF-A04).
- MCEER-98-0016 "Appropriate Seismic Reliability for Critical Equipment Systems: Recommendations Based on Regional Analysis of Financial and Life Loss," by K. Porter, C. Scawthorn, C. Taylor and N. Blais, 11/10/98, (PB99-157265, A08, MF-A02).
- MCEER-98-0017 "Proceedings of the U.S. Japan Joint Seminar on Civil Infrastructure Systems Research," edited by M. Shinozuka and A. Rose, 11/12/98, (PB99-156713, A16, MF-A03).
- MCEER-98-0018 "Modeling of Pile Footings and Drilled Shafts for Seismic Design," by I. PoLam, M. Kapuskar and D. Chaudhuri, 12/21/98, (PB99-157257, A09, MF-A02).

- MCEER-99-0001 "Seismic Evaluation of a Masonry Infilled Reinforced Concrete Frame by Pseudodynamic Testing," by S.G. Buonopane and R.N. White, 2/16/99, (PB99-162851, A09, MF-A02).
- MCEER-99-0002 "Response History Analysis of Structures with Seismic Isolation and Energy Dissipation Systems: Verification Examples for Program SAP2000," by J. Scheller and M.C. Constantinou, 2/22/99, (PB99-162869, A08, MF-A02).
- MCEER-99-0003 "Experimental Study on the Seismic Design and Retrofit of Bridge Columns Including Axial Load Effects," by A. Dutta, T. Kokorina and J.B. Mander, 2/22/99, (PB99-162877, A09, MF-A02).
- MCEER-99-0004 "Experimental Study of Bridge Elastomeric and Other Isolation and Energy Dissipation Systems with Emphasis on Uplift Prevention and High Velocity Near-source Seismic Excitation," by A. Kasalanati and M. C. Constantinou, 2/26/99, (PB99-162885, A12, MF-A03).
- MCEER-99-0005 "Truss Modeling of Reinforced Concrete Shear-flexure Behavior," by J.H. Kim and J.B. Mander, 3/8/99, (PB99-163693, A12, MF-A03).
- MCEER-99-0006 "Experimental Investigation and Computational Modeling of Seismic Response of a 1:4 Scale Model Steel Structure with a Load Balancing Supplemental Damping System," by G. Pekcan, J.B. Mander and S.S. Chen, 4/2/99, (PB99-162893, A11, MF-A03).
- MCEER-99-0007 "Effect of Vertical Ground Motions on the Structural Response of Highway Bridges," by M.R. Button, C.J. Cronin and R.L. Mayes, 4/10/99, (PB2000-101411, A10, MF-A03).
- MCEER-99-0008 "Seismic Reliability Assessment of Critical Facilities: A Handbook, Supporting Documentation, and Model Code Provisions," by G.S. Johnson, R.E. Sheppard, M.D. Quilici, S.J. Eder and C.R. Scawthorn, 4/12/99, (PB2000-101701, A18, MF-A04).
- MCEER-99-0009 "Impact Assessment of Selected MCEER Highway Project Research on the Seismic Design of Highway Structures," by C. Rojahn, R. Mayes, D.G. Anderson, J.H. Clark, D'Appolonia Engineering, S. Gloyd and R.V. Nutt, 4/14/99, (PB99-162901, A10, MF-A02).
- MCEER-99-0010 "Site Factors and Site Categories in Seismic Codes," by R. Dobry, R. Ramos and M.S. Power, 7/19/99, (PB2000-101705, A08, MF-A02).
- MCEER-99-0011 "Restraint Design Procedures for Multi-Span Simply-Supported Bridges," by M.J. Randall, M. Saiidi, E. Maragakis and T. Isakovic, 7/20/99, (PB2000-101702, A10, MF-A02).
- MCEER-99-0012 "Property Modification Factors for Seismic Isolation Bearings," by M.C. Constantinou, P. Tsopelas, A. Kasalanati and E. Wolff, 7/20/99, (PB2000-103387, A11, MF-A03).
- MCEER-99-0013 "Critical Seismic Issues for Existing Steel Bridges," by P. Ritchie, N. Kauh and J. Kulicki, 7/20/99, (PB2000-101697, A09, MF-A02).
- MCEER-99-0014 "Nonstructural Damage Database," by A. Kao, T.T. Soong and A. Vender, 7/24/99, (PB2000-101407, A06, MF-A01).
- MCEER-99-0015 "Guide to Remedial Measures for Liquefaction Mitigation at Existing Highway Bridge Sites," by H.G. Cooke and J. K. Mitchell, 7/26/99, (PB2000-101703, A11, MF-A03).
- MCEER-99-0016 "Proceedings of the MCEER Workshop on Ground Motion Methodologies for the Eastern United States," edited by N. Abrahamson and A. Becker, 8/11/99, (PB2000-103385, A07, MF-A02).
- MCEER-99-0017 "Quindío, Colombia Earthquake of January 25, 1999: Reconnaissance Report," by A.P. Asfura and P.J. Flores, 10/4/99, (PB2000-106893, A06, MF-A01).
- MCEER-99-0018 "Hysteretic Models for Cyclic Behavior of Deteriorating Inelastic Structures," by M.V. Sivaselvan and A.M. Reinhorn, 11/5/99, (PB2000-103386, A08, MF-A02).

- MCEER-99-0019 "Proceedings of the 7<sup>th</sup> U.S.- Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Soil Liquefaction," edited by T.D. O'Rourke, J.P. Bardet and M. Hamada, 11/19/99, (PB2000-103354, A99, MF-A06).
- MCEER-99-0020 "Development of Measurement Capability for Micro-Vibration Evaluations with Application to Chip Fabrication Facilities," by G.C. Lee, Z. Liang, J.W. Song, J.D. Shen and W.C. Liu, 12/1/99, (PB2000-105993, A08, MF-A02).
- MCEER-99-0021 "Design and Retrofit Methodology for Building Structures with Supplemental Energy Dissipating Systems," by G. Pekcan, J.B. Mander and S.S. Chen, 12/31/99, (PB2000-105994, A11, MF-A03).
- MCEER-00-0001 "The Marmara, Turkey Earthquake of August 17, 1999: Reconnaissance Report," edited by C. Scawthorn; with major contributions by M. Bruneau, R. Eguchi, T. Holzer, G. Johnson, J. Mander, J. Mitchell, W. Mitchell, A. Papageorgiou, C. Scaethorn, and G. Webb, 3/23/00, (PB2000-106200, A11, MF-A03).
- MCEER-00-0002 "Proceedings of the MCEER Workshop for Seismic Hazard Mitigation of Health Care Facilities," edited by G.C. Lee, M. Ettouney, M. Grigoriu, J. Hauer and J. Nigg, 3/29/00, (PB2000-106892, A08, MF-A02).
- MCEER-00-0003 "The Chi-Chi, Taiwan Earthquake of September 21, 1999: Reconnaissance Report," edited by G.C. Lee and C.H. Loh, with major contributions by G.C. Lee, M. Bruneau, I.G. Buckle, S.E. Chang, P.J. Flores, T.D. O'Rourke, M. Shinozuka, T.T. Soong, C-H. Loh, K-C. Chang, Z-J. Chen, J-S. Hwang, M-L. Lin, G-Y. Liu, K-C. Tsai, G.C. Yao and C-L. Yen, 4/30/00, (PB2001-100980, A10, MF-A02).
- MCEER-00-0004 "Seismic Retrofit of End-Sway Frames of Steel Deck-Truss Bridges with a Supplemental Tendon System: Experimental and Analytical Investigation," by G. Pekcan, J.B. Mander and S.S. Chen, 7/1/00, (PB2001-100982, A10, MF-A02).
- MCEER-00-0005 "Sliding Fragility of Unrestrained Equipment in Critical Facilities," by W.H. Chong and T.T. Soong, 7/5/00, (PB2001-100983, A08, MF-A02).
- MCEER-00-0006 "Seismic Response of Reinforced Concrete Bridge Pier Walls in the Weak Direction," by N. Abo-Shadi, M. Saiidi and D. Sanders, 7/17/00, (PB2001-100981, A17, MF-A03).
- MCEER-00-0007 "Low-Cycle Fatigue Behavior of Longitudinal Reinforcement in Reinforced Concrete Bridge Columns," by J. Brown and S.K. Kunnath, 7/23/00, (PB2001-104392, A08, MF-A02).
- MCEER-00-0008 "Soil Structure Interaction of Bridges for Seismic Analysis," I. PoLam and H. Law, 9/25/00, (PB2001-105397, A08, MF-A02).
- MCEER-00-0009 "Proceedings of the First MCEER Workshop on Mitigation of Earthquake Disaster by Advanced Technologies (MEDAT-1), edited by M. Shinozuka, D.J. Inman and T.D. O'Rourke, 11/10/00, (PB2001-105399, A14, MF-A03).
- MCEER-00-0010 "Development and Evaluation of Simplified Procedures for Analysis and Design of Buildings with Passive Energy Dissipation Systems, Revision 01," by O.M. Ramirez, M.C. Constantinou, C.A. Kircher, A.S. Whittaker, M.W. Johnson, J.D. Gomez and C. Chrysostomou, 11/16/01, (PB2001-105523, A23, MF-A04).
- MCEER-00-0011 "Dynamic Soil-Foundation-Structure Interaction Analyses of Large Caissons," by C-Y. Chang, C-M. Mok, Z-L. Wang, R. Settgast, F. Waggoner, M.A. Ketchum, H.M. Gonnermann and C-C. Chin, 12/30/00, (PB2001-104373, A07, MF-A02).
- MCEER-00-0012 "Experimental Evaluation of Seismic Performance of Bridge Restrainers," by A.G. Vlassis, E.M. Maragakis and M. Saiid Saiidi, 12/30/00, (PB2001-104354, A09, MF-A02).
- MCEER-00-0013 "Effect of Spatial Variation of Ground Motion on Highway Structures," by M. Shinozuka, V. Saxena and G. Deodatis, 12/31/00, (PB2001-108755, A13, MF-A03).
- MCEER-00-0014 "A Risk-Based Methodology for Assessing the Seismic Performance of Highway Systems," by S.D. Werner, C.E. Taylor, J.E. Moore, II, J.S. Walton and S. Cho, 12/31/00, (PB2001-108756, A14, MF-A03).



- MCEER-01-0001 “Experimental Investigation of P-Delta Effects to Collapse During Earthquakes,” by D. Vian and M. Bruneau, 6/25/01, (PB2002-100534, A17, MF-A03).
- MCEER-01-0002 “Proceedings of the Second MCEER Workshop on Mitigation of Earthquake Disaster by Advanced Technologies (MEDAT-2),” edited by M. Bruneau and D.J. Inman, 7/23/01, (PB2002-100434, A16, MF-A03).
- MCEER-01-0003 “Sensitivity Analysis of Dynamic Systems Subjected to Seismic Loads,” by C. Roth and M. Grigoriu, 9/18/01, (PB2003-100884, A12, MF-A03).
- MCEER-01-0004 “Overcoming Obstacles to Implementing Earthquake Hazard Mitigation Policies: Stage 1 Report,” by D.J. Alesch and W.J. Petak, 12/17/01, (PB2002-107949, A07, MF-A02).
- MCEER-01-0005 “Updating Real-Time Earthquake Loss Estimates: Methods, Problems and Insights,” by C.E. Taylor, S.E. Chang and R.T. Eguchi, 12/17/01, (PB2002-107948, A05, MF-A01).
- MCEER-01-0006 “Experimental Investigation and Retrofit of Steel Pile Foundations and Pile Bents Under Cyclic Lateral Loadings,” by A. Shama, J. Mander, B. Blabac and S. Chen, 12/31/01, (PB2002-107950, A13, MF-A03).
- MCEER-02-0001 “Assessment of Performance of Bolu Viaduct in the 1999 Duzce Earthquake in Turkey” by P.C. Roussis, M.C. Constantinou, M. Erdik, E. Durukal and M. Dicleli, 5/8/02, (PB2003-100883, A08, MF-A02).
- MCEER-02-0002 “Seismic Behavior of Rail Counterweight Systems of Elevators in Buildings,” by M.P. Singh, Rildova and L.E. Suarez, 5/27/02. (PB2003-100882, A11, MF-A03).
- MCEER-02-0003 “Development of Analysis and Design Procedures for Spread Footings,” by G. Mylonakis, G. Gazetas, S. Nikolaou and A. Chauncey, 10/02/02, (PB2004-101636, A13, MF-A03, CD-A13).
- MCEER-02-0004 “Bare-Earth Algorithms for Use with SAR and LIDAR Digital Elevation Models,” by C.K. Huyck, R.T. Eguchi and B. Houshmand, 10/16/02, (PB2004-101637, A07, CD-A07).
- MCEER-02-0005 “Review of Energy Dissipation of Compression Members in Concentrically Braced Frames,” by K.Lee and M. Bruneau, 10/18/02, (PB2004-101638, A10, CD-A10).
- MCEER-03-0001 “Experimental Investigation of Light-Gauge Steel Plate Shear Walls for the Seismic Retrofit of Buildings” by J. Berman and M. Bruneau, 5/2/03, (PB2004-101622, A10, MF-A03, CD-A10).
- MCEER-03-0002 “Statistical Analysis of Fragility Curves,” by M. Shinozuka, M.Q. Feng, H. Kim, T. Uzawa and T. Ueda, 6/16/03, (PB2004-101849, A09, CD-A09).
- MCEER-03-0003 “Proceedings of the Eighth U.S.-Japan Workshop on Earthquake Resistant Design of Lifeline Facilities and Countermeasures Against Liquefaction,” edited by M. Hamada, J.P. Bardet and T.D. O’Rourke, 6/30/03, (PB2004-104386, A99, CD-A99).
- MCEER-03-0004 “Proceedings of the PRC-US Workshop on Seismic Analysis and Design of Special Bridges,” edited by L.C. Fan and G.C. Lee, 7/15/03, (PB2004-104387, A14, CD-A14).
- MCEER-03-0005 “Urban Disaster Recovery: A Framework and Simulation Model,” by S.B. Miles and S.E. Chang, 7/25/03, (PB2004-104388, A07, CD-A07).
- MCEER-03-0006 “Behavior of Underground Piping Joints Due to Static and Dynamic Loading,” by R.D. Meis, M. Maragakis and R. Siddharthan, 11/17/03, (PB2005-102194, A13, MF-A03, CD-A00).
- MCEER-04-0001 “Experimental Study of Seismic Isolation Systems with Emphasis on Secondary System Response and Verification of Accuracy of Dynamic Response History Analysis Methods,” by E. Wolff and M. Constantinou, 1/16/04 (PB2005-102195, A99, MF-E08, CD-A00).
- MCEER-04-0002 “Tension, Compression and Cyclic Testing of Engineered Cementitious Composite Materials,” by K. Kesner and S.L. Billington, 3/1/04, (PB2005-102196, A08, CD-A08).

- MCEER-04-0003 "Cyclic Testing of Braces Laterally Restrained by Steel Studs to Enhance Performance During Earthquakes," by O.C. Celik, J.W. Berman and M. Bruneau, 3/16/04, (PB2005-102197, A13, MF-A03, CD-A00).
- MCEER-04-0004 "Methodologies for Post Earthquake Building Damage Detection Using SAR and Optical Remote Sensing: Application to the August 17, 1999 Marmara, Turkey Earthquake," by C.K. Huyck, B.J. Adams, S. Cho, R.T. Eguchi, B. Mansouri and B. Houshmand, 6/15/04, (PB2005-104888, A10, CD-A00).
- MCEER-04-0005 "Nonlinear Structural Analysis Towards Collapse Simulation: A Dynamical Systems Approach," by M.V. Sivaselvan and A.M. Reinhorn, 6/16/04, (PB2005-104889, A11, MF-A03, CD-A00).
- MCEER-04-0006 "Proceedings of the Second PRC-US Workshop on Seismic Analysis and Design of Special Bridges," edited by G.C. Lee and L.C. Fan, 6/25/04, (PB2005-104890, A16, CD-A00).
- MCEER-04-0007 "Seismic Vulnerability Evaluation of Axially Loaded Steel Built-up Laced Members," by K. Lee and M. Bruneau, 6/30/04, (PB2005-104891, A16, CD-A00).
- MCEER-04-0008 "Evaluation of Accuracy of Simplified Methods of Analysis and Design of Buildings with Damping Systems for Near-Fault and for Soft-Soil Seismic Motions," by E.A. Pavlou and M.C. Constantinou, 8/16/04, (PB2005-104892, A08, MF-A02, CD-A00).
- MCEER-04-0009 "Assessment of Geotechnical Issues in Acute Care Facilities in California," by M. Lew, T.D. O'Rourke, R. Dobry and M. Koch, 9/15/04, (PB2005-104893, A08, CD-A00).
- MCEER-04-0010 "Scissor-Jack-Damper Energy Dissipation System," by A.N. Sigaher-Boyle and M.C. Constantinou, 12/1/04 (PB2005-108221).
- MCEER-04-0011 "Seismic Retrofit of Bridge Steel Truss Piers Using a Controlled Rocking Approach," by M. Pollino and M. Bruneau, 12/20/04 (PB2006-105795).
- MCEER-05-0001 "Experimental and Analytical Studies of Structures Seismically Isolated with an Uplift-Restraint Isolation System," by P.C. Roussis and M.C. Constantinou, 1/10/05 (PB2005-108222).
- MCEER-05-0002 "A Versatile Experimentation Model for Study of Structures Near Collapse Applied to Seismic Evaluation of Irregular Structures," by D. Kusumastuti, A.M. Reinhorn and A. Rutenberg, 3/31/05 (PB2006-101523).
- MCEER-05-0003 "Proceedings of the Third PRC-US Workshop on Seismic Analysis and Design of Special Bridges," edited by L.C. Fan and G.C. Lee, 4/20/05, (PB2006-105796).
- MCEER-05-0004 "Approaches for the Seismic Retrofit of Braced Steel Bridge Piers and Proof-of-Concept Testing of an Eccentrically Braced Frame with Tubular Link," by J.W. Berman and M. Bruneau, 4/21/05 (PB2006-101524).
- MCEER-05-0005 "Simulation of Strong Ground Motions for Seismic Fragility Evaluation of Nonstructural Components in Hospitals," by A. Wanitkorkul and A. Filiatrault, 5/26/05 (PB2006-500027).
- MCEER-05-0006 "Seismic Safety in California Hospitals: Assessing an Attempt to Accelerate the Replacement or Seismic Retrofit of Older Hospital Facilities," by D.J. Alesch, L.A. Arendt and W.J. Petak, 6/6/05 (PB2006-105794).
- MCEER-05-0007 "Development of Seismic Strengthening and Retrofit Strategies for Critical Facilities Using Engineered Cementitious Composite Materials," by K. Kesner and S.L. Billington, 8/29/05 (PB2006-111701).
- MCEER-05-0008 "Experimental and Analytical Studies of Base Isolation Systems for Seismic Protection of Power Transformers," by N. Murota, M.Q. Feng and G-Y. Liu, 9/30/05 (PB2006-111702).
- MCEER-05-0009 "3D-BASIS-ME-MB: Computer Program for Nonlinear Dynamic Analysis of Seismically Isolated Structures," by P.C. Tsopelas, P.C. Roussis, M.C. Constantinou, R. Buchanan and A.M. Reinhorn, 10/3/05 (PB2006-111703).
- MCEER-05-0010 "Steel Plate Shear Walls for Seismic Design and Retrofit of Building Structures," by D. Vian and M. Bruneau, 12/15/05 (PB2006-111704).


- MCEER-05-0011 "The Performance-Based Design Paradigm," by M.J. Astrella and A. Whittaker, 12/15/05 (PB2006-111705).
- MCEER-06-0001 "Seismic Fragility of Suspended Ceiling Systems," H. Badillo-Almaraz, A.S. Whittaker, A.M. Reinhorn and G.P. Cimellaro, 2/4/06 (PB2006-111706).
- MCEER-06-0002 "Multi-Dimensional Fragility of Structures," by G.P. Cimellaro, A.M. Reinhorn and M. Bruneau, 3/1/06 (PB2007-106974, A09, MF-A02, CD A00).
- MCEER-06-0003 "Built-Up Shear Links as Energy Dissipators for Seismic Protection of Bridges," by P. Dusicka, A.M. Itani and I.G. Buckle, 3/15/06 (PB2006-111708).
- MCEER-06-0004 "Analytical Investigation of the Structural Fuse Concept," by R.E. Vargas and M. Bruneau, 3/16/06 (PB2006-111709).
- MCEER-06-0005 "Experimental Investigation of the Structural Fuse Concept," by R.E. Vargas and M. Bruneau, 3/17/06 (PB2006-111710).
- MCEER-06-0006 "Further Development of Tubular Eccentrically Braced Frame Links for the Seismic Retrofit of Braced Steel Truss Bridge Piers," by J.W. Berman and M. Bruneau, 3/27/06 (PB2007-105147).
- MCEER-06-0007 "REDARS Validation Report," by S. Cho, C.K. Huyck, S. Ghosh and R.T. Eguchi, 8/8/06 (PB2007-106983).
- MCEER-06-0008 "Review of Current NDE Technologies for Post-Earthquake Assessment of Retrofitted Bridge Columns," by J.W. Song, Z. Liang and G.C. Lee, 8/21/06 (PB2007-106984).
- MCEER-06-0009 "Liquefaction Remediation in Silty Soils Using Dynamic Compaction and Stone Columns," by S. Thevanayagam, G.R. Martin, R. Nashed, T. Shenthan, T. Kanagalingam and N. Ecemis, 8/28/06 (PB2007-106985).
- MCEER-06-0010 "Conceptual Design and Experimental Investigation of Polymer Matrix Composite Infill Panels for Seismic Retrofitting," by W. Jung, M. Chiewanichakorn and A.J. Aref, 9/21/06 (PB2007-106986).
- MCEER-06-0011 "A Study of the Coupled Horizontal-Vertical Behavior of Elastomeric and Lead-Rubber Seismic Isolation Bearings," by G.P. Warn and A.S. Whittaker, 9/22/06 (PB2007-108679).
- MCEER-06-0012 "Proceedings of the Fourth PRC-US Workshop on Seismic Analysis and Design of Special Bridges: Advancing Bridge Technologies in Research, Design, Construction and Preservation," Edited by L.C. Fan, G.C. Lee and L. Ziang, 10/12/06 (PB2007-109042).
- MCEER-06-0013 "Cyclic Response and Low Cycle Fatigue Characteristics of Plate Steels," by P. Dusicka, A.M. Itani and I.G. Buckle, 11/1/06 06 (PB2007-106987).
- MCEER-06-0014 "Proceedings of the Second US-Taiwan Bridge Engineering Workshop," edited by W.P. Yen, J. Shen, J-Y. Chen and M. Wang, 11/15/06 (PB2008-500041).
- MCEER-06-0015 "User Manual and Technical Documentation for the REDARS<sup>TM</sup> Import Wizard," by S. Cho, S. Ghosh, C.K. Huyck and S.D. Werner, 11/30/06 (PB2007-114766).
- MCEER-06-0016 "Hazard Mitigation Strategy and Monitoring Technologies for Urban and Infrastructure Public Buildings: Proceedings of the China-US Workshops," edited by X.Y. Zhou, A.L. Zhang, G.C. Lee and M. Tong, 12/12/06 (PB2008-500018).
- MCEER-07-0001 "Static and Kinetic Coefficients of Friction for Rigid Blocks," by C. Kafali, S. Fathali, M. Grigoriu and A.S. Whittaker, 3/20/07 (PB2007-114767).
- MCEER-07-0002 "Hazard Mitigation Investment Decision Making: Organizational Response to Legislative Mandate," by L.A. Arendt, D.J. Alesch and W.J. Petak, 4/9/07 (PB2007-114768).
- MCEER-07-0003 "Seismic Behavior of Bidirectional-Resistant Ductile End Diaphragms with Unbonded Braces in Straight or Skewed Steel Bridges," by O. Celik and M. Bruneau, 4/11/07 (PB2008-105141).

- MCEER-07-0004 “Modeling Pile Behavior in Large Pile Groups Under Lateral Loading,” by A.M. Dodds and G.R. Martin, 4/16/07(PB2008-105142).
- MCEER-07-0005 “Experimental Investigation of Blast Performance of Seismically Resistant Concrete-Filled Steel Tube Bridge Piers,” by S. Fujikura, M. Bruneau and D. Lopez-Garcia, 4/20/07 (PB2008-105143).
- MCEER-07-0006 “Seismic Analysis of Conventional and Isolated Liquefied Natural Gas Tanks Using Mechanical Analogs,” by I.P. Christovasilis and A.S. Whittaker, 5/1/07.
- MCEER-07-0007 “Experimental Seismic Performance Evaluation of Isolation/Restraint Systems for Mechanical Equipment – Part 1: Heavy Equipment Study,” by S. Fathali and A. Filiatrault, 6/6/07 (PB2008-105144).
- MCEER-07-0008 “Seismic Vulnerability of Timber Bridges and Timber Substructures,” by A.A. Sharma, J.B. Mander, I.M. Friedland and D.R. Allicock, 6/7/07 (PB2008-105145).
- MCEER-07-0009 “Experimental and Analytical Study of the XY-Friction Pendulum (XY-FP) Bearing for Bridge Applications,” by C.C. Marin-Artieda, A.S. Whittaker and M.C. Constantinou, 6/7/07 (PB2008-105191).
- MCEER-07-0010 “Proceedings of the PRC-US Earthquake Engineering Forum for Young Researchers,” Edited by G.C. Lee and X.Z. Qi, 6/8/07 (PB2008-500058).
- MCEER-07-0011 “Design Recommendations for Perforated Steel Plate Shear Walls,” by R. Purba and M. Bruneau, 6/18/07, (PB2008-105192).
- MCEER-07-0012 “Performance of Seismic Isolation Hardware Under Service and Seismic Loading,” by M.C. Constantinou, A.S. Whittaker, Y. Kalpakidis, D.M. Fenz and G.P. Warn, 8/27/07, (PB2008-105193).
- MCEER-07-0013 “Experimental Evaluation of the Seismic Performance of Hospital Piping Subassemblies,” by E.R. Goodwin, E. Maragakis and A.M. Itani, 9/4/07, (PB2008-105194).
- MCEER-07-0014 “A Simulation Model of Urban Disaster Recovery and Resilience: Implementation for the 1994 Northridge Earthquake,” by S. Miles and S.E. Chang, 9/7/07, (PB2008-106426).
- MCEER-07-0015 “Statistical and Mechanistic Fragility Analysis of Concrete Bridges,” by M. Shinozuka, S. Banerjee and S-H. Kim, 9/10/07, (PB2008-106427).
- MCEER-07-0016 “Three-Dimensional Modeling of Inelastic Buckling in Frame Structures,” by M. Schachter and AM. Reinhorn, 9/13/07, (PB2008-108125).
- MCEER-07-0017 “Modeling of Seismic Wave Scattering on Pile Groups and Caissons,” by I. Po Lam, H. Law and C.T. Yang, 9/17/07 (PB2008-108150).
- MCEER-07-0018 “Bridge Foundations: Modeling Large Pile Groups and Caissons for Seismic Design,” by I. Po Lam, H. Law and G.R. Martin (Coordinating Author), 12/1/07 (PB2008-111190).
- MCEER-07-0019 “Principles and Performance of Roller Seismic Isolation Bearings for Highway Bridges,” by G.C. Lee, Y.C. Ou, Z. Liang, T.C. Niu and J. Song, 12/10/07 (PB2009-110466).
- MCEER-07-0020 “Centrifuge Modeling of Permeability and Pinning Reinforcement Effects on Pile Response to Lateral Spreading,” by L.L. Gonzalez-Lagos, T. Abdoun and R. Dobry, 12/10/07 (PB2008-111191).
- MCEER-07-0021 “Damage to the Highway System from the Pisco, Perú Earthquake of August 15, 2007,” by J.S. O’Connor, L. Mesa and M. Nykamp, 12/10/07, (PB2008-108126).
- MCEER-07-0022 “Experimental Seismic Performance Evaluation of Isolation/Restraint Systems for Mechanical Equipment – Part 2: Light Equipment Study,” by S. Fathali and A. Filiatrault, 12/13/07 (PB2008-111192).
- MCEER-07-0023 “Fragility Considerations in Highway Bridge Design,” by M. Shinozuka, S. Banerjee and S.H. Kim, 12/14/07 (PB2008-111193).

- MCEER-07-0024 “Performance Estimates for Seismically Isolated Bridges,” by G.P. Warn and A.S. Whittaker, 12/30/07 (PB2008-112230).
- MCEER-08-0001 “Seismic Performance of Steel Girder Bridge Superstructures with Conventional Cross Frames,” by L.P. Carden, A.M. Itani and I.G. Buckle, 1/7/08, (PB2008-112231).
- MCEER-08-0002 “Seismic Performance of Steel Girder Bridge Superstructures with Ductile End Cross Frames with Seismic Isolators,” by L.P. Carden, A.M. Itani and I.G. Buckle, 1/7/08 (PB2008-112232).
- MCEER-08-0003 “Analytical and Experimental Investigation of a Controlled Rocking Approach for Seismic Protection of Bridge Steel Truss Piers,” by M. Pollino and M. Bruneau, 1/21/08 (PB2008-112233).
- MCEER-08-0004 “Linking Lifeline Infrastructure Performance and Community Disaster Resilience: Models and Multi-Stakeholder Processes,” by S.E. Chang, C. Pasion, K. Tatebe and R. Ahmad, 3/3/08 (PB2008-112234).
- MCEER-08-0005 “Modal Analysis of Generally Damped Linear Structures Subjected to Seismic Excitations,” by J. Song, Y-L. Chu, Z. Liang and G.C. Lee, 3/4/08 (PB2009-102311).
- MCEER-08-0006 “System Performance Under Multi-Hazard Environments,” by C. Kafali and M. Grigoriu, 3/4/08 (PB2008-112235).
- MCEER-08-0007 “Mechanical Behavior of Multi-Spherical Sliding Bearings,” by D.M. Fenz and M.C. Constantinou, 3/6/08 (PB2008-112236).
- MCEER-08-0008 “Post-Earthquake Restoration of the Los Angeles Water Supply System,” by T.H.P. Tabucchi and R.A. Davidson, 3/7/08 (PB2008-112237).
- MCEER-08-0009 “Fragility Analysis of Water Supply Systems,” by A. Jacobson and M. Grigoriu, 3/10/08 (PB2009-105545).
- MCEER-08-0010 “Experimental Investigation of Full-Scale Two-Story Steel Plate Shear Walls with Reduced Beam Section Connections,” by B. Qu, M. Bruneau, C-H. Lin and K-C. Tsai, 3/17/08 (PB2009-106368).
- MCEER-08-0011 “Seismic Evaluation and Rehabilitation of Critical Components of Electrical Power Systems,” S. Ersoy, B. Feizi, A. Ashrafi and M. Ala Saadeghvaziri, 3/17/08 (PB2009-105546).
- MCEER-08-0012 “Seismic Behavior and Design of Boundary Frame Members of Steel Plate Shear Walls,” by B. Qu and M. Bruneau, 4/26/08 . (PB2009-106744).
- MCEER-08-0013 “Development and Appraisal of a Numerical Cyclic Loading Protocol for Quantifying Building System Performance,” by A. Filiatrault, A. Wanitkorkul and M. Constantinou, 4/27/08 (PB2009-107906).
- MCEER-08-0014 “Structural and Nonstructural Earthquake Design: The Challenge of Integrating Specialty Areas in Designing Complex, Critical Facilities,” by W.J. Petak and D.J. Alesch, 4/30/08 (PB2009-107907).
- MCEER-08-0015 “Seismic Performance Evaluation of Water Systems,” by Y. Wang and T.D. O’Rourke, 5/5/08 (PB2009-107908).
- MCEER-08-0016 “Seismic Response Modeling of Water Supply Systems,” by P. Shi and T.D. O’Rourke, 5/5/08 (PB2009-107910).
- MCEER-08-0017 “Numerical and Experimental Studies of Self-Centering Post-Tensioned Steel Frames,” by D. Wang and A. Filiatrault, 5/12/08 (PB2009-110479).
- MCEER-08-0018 “Development, Implementation and Verification of Dynamic Analysis Models for Multi-Spherical Sliding Bearings,” by D.M. Fenz and M.C. Constantinou, 8/15/08 (PB2009-107911).
- MCEER-08-0019 “Performance Assessment of Conventional and Base Isolated Nuclear Power Plants for Earthquake Blast Loadings,” by Y.N. Huang, A.S. Whittaker and N. Luco, 10/28/08 (PB2009-107912).
- MCEER-08-0020 “Remote Sensing for Resilient Multi-Hazard Disaster Response – Volume I: Introduction to Damage Assessment Methodologies,” by B.J. Adams and R.T. Eguchi, 11/17/08.


MCEER-08-0021 “Remote Sensing for Resilient Multi-Hazard Disaster Response – Volume II: Counting the Number of Collapsed Buildings Using an Object-Oriented Analysis: Case Study of the 2003 Bam Earthquake,” by L. Gusella, C.K. Huyck and B.J. Adams, 11/17/08.





**EARTHQUAKE ENGINEERING TO EXTREME EVENTS**

University at Buffalo, The State University of New York  
Red Jacket Quadrangle ▪ Buffalo, New York 14261  
Phone: (716) 645-3391 ▪ Fax: (716) 645-3399  
E-mail: [mceer@buffalo.edu](mailto:mceer@buffalo.edu) ▪ WWW Site <http://mceer.buffalo.edu>



University at Buffalo *The State University of New York*

ISSN 1520-295X